



MultiTech xDot[®]

Long Range LoRaWAN[®] Certified Module



MultiTech xDot[®] is a low-power, LoRaWAN[®] 1.0.4 Certified module designed to enable long-range, low-bandwidth communication for the Internet of Things (IoT) devices. With its ultra-low power consumption, the xDot is perfect for use in a wide range of IoT applications, including smart cities, agriculture, environmental monitoring, and industrial automation.

Featuring the latest in LoRaWAN technology, the xDot is capable of reaching more than 22 miles/35 km line-of-sight, making it ideal for remote and hard-to-reach locations, and provides excellent building penetration. Its low power consumption extends sensor and device battery life up to 10 years, making it the most reliable and cost-effective choice for long-term deployments. The xDot easily integrates into existing systems via serial UART AT Commands or you can build your own custom application.

Cybersecurity is critical to any IoT systems and MultiTech works continuously to ensure its devices are secure. The xDot safeguards IoT devices against the possibility of cyberattacks by following the AES-128 standard via symmetric cryptography and secret keys.

Both the xDot Essential and Advanced models share identical pins, enabling a straightforward and flexible substitution without the need for costly hardware upgrades or complex software development. The Advanced model provides additional features for more functionality including additional I/O's, 8 Mb flash FOTA memory, trace and UFL antennas, and allows for custom applications.


MultiTech's proven reliability, established through rigorous testing and time-to-market, provide a global solution for Enterprises around the world. Whether you're looking to deploy a large-scale IoT network or simply need a reliable way to monitor a few remote devices, the MultiTech xDot is the ideal connected solution optimized for both performance and value.

BENEFITS

- High Reliability and Global Scalability
- Meets AES-128 standard via symmetric cryptography and secret keys
- Ultra-low power consumption with Sleep Current = 1.0uA
- LoRaWAN Channel Plans Supported (US915, AS923, AU915, EU868, IN865, KR920, RU864, CN470)

FEATURES

- Ease of integration
- Protected and Isolated LoRaWAN stack resulting in a reliable and certifiable LoRaWAN solution
- Software updates over UART and over-the-air for the Advanced version
 - LoRaWAN 1.0.4 Certified Product
 - End-to-end AES-128 encryption
 - Over-the-Air Activation (OTAA) or Activation by Personalization (ABP)
- Certified for use in Australia, Canada, Europe, India, Japan, Korea, New Zealand, United Kingdom, United States
- Check with MultiTech for the latest country-specific support

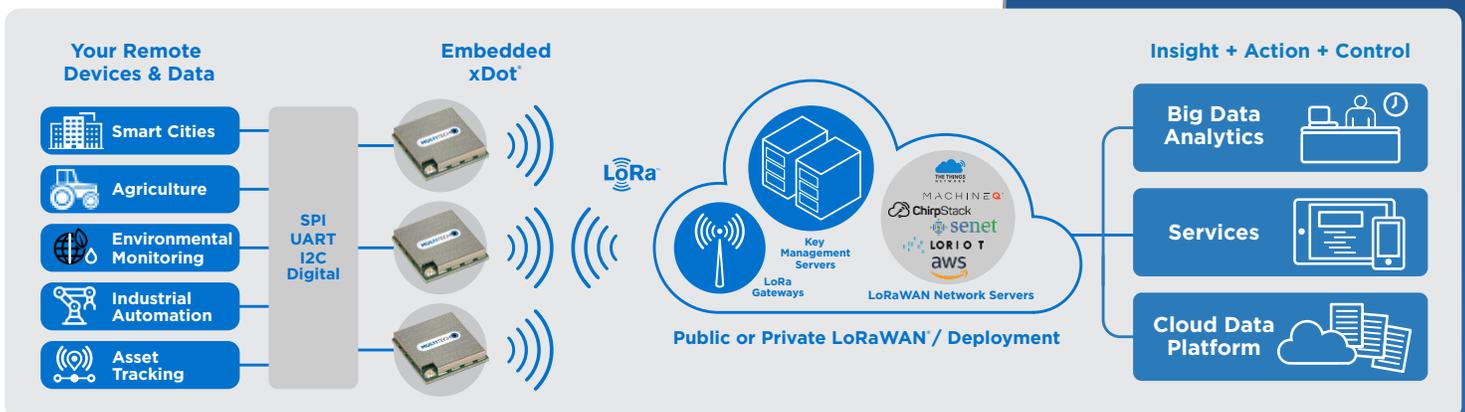

SPECIFICATIONS

Models	xDot Essential		xDot Advanced	
	MTXDOT-NA1-B15 MTXDOT-WW1-B15 MTXDOT-CN1-B15		MTXDOT-NA1-B10 MTXDOT-WW1-B10 MTXDOT-CN1-B10	
Region/Country	-NA1 = Canada, United States -WW = Canada, United States, Asia Pacific, Australia, Europe, India, Japan, Korea, United Kingdom, Russia -CN1 = China			
LoRaWAN	LoRaWAN 1.0.4 Activation OTAA/ABP Class A, B, C LoRa Point-to-Point			
LoRa Radio	SX1262 sub-GHz RF Transceiver			
LoRa Radio Frequency Plan	-NA1 = US915 -WW = US915, AS923-1/2/3/4, AU915, EU868, IN865, KR920, RU864 -CN1 = CN470*			
Channel Configurability	Up to 16-channels (regionally dependent)			
Listen-Before-Talk (LBT) Enabled	Yes			
Host Interface	1x Low Power UART			
Module Package/Physical Dimensions	Surface Mount, 47-pin LGA / 23.6 mm X 23.6 mm x 3.51 (.93" x .93" x 0.14")			
Packaging	Tape and Reel			
Performance				
Processor	ARM® Cortex-M4			
Clock Speed	100 MHz internal clock speed			
Operating System	ARM Mbed OS			
Application	AT Command		AT Command or Custom OS Libraries	
System Memory	160KB SRAM			
Flash Memory	384 KB			
FOTA Memory	Passthrough Mode Using AT Commands (Requires External Flash)		8 Mb Flash	
Bootloader	UART			
Input/Output	UART, Wake, Reset, Status PINs		19 Digital I/O 2 UART, I2C, SPI, Wake, Reset	
Security	AES 128 LoRaWAN Compliance Standard			
Power				
Supply Voltage	2.4 to 3.57V			
Maximum Transmitter Power Output (TPO)	21 dBm / Limited by LoRaWAN Regional Specification			
Maximum Receive Sensitivity	-148 dBm			
Deep Sleep Current	Deep Sleep = 1.0 uA			
Maximum Effective Isotropic Radiated Power (EIRP)	36 dBm @ 915 MHz / 16 dBm @ 868 MHz / 19 dBm @ 470 MHz			
Antenna Options				
Configuration	Trace Antenna		UFL and Trace Antenna	
Environmental				
Operating Temperature	-40° C to +85° C (-40° F to +185° F)			
Storage Temperature	-40° C to +85° C (-40° F to +185° F)			
Relative Humidity	20% to 90% RH noncondensing			
Moisture Level	MSL 3			
ESD	ANSI/ESD S20.20-1999			
Certifications				
EMC Compliance	Australia and New Zealand: CISPR 22 / Canada: ICES-003 / Europe and United Kingdom: EN 55022 Class B, EN 55024, CISPR 22:2008 Japan: TELEC, Radio/Telecom Biz Act, Giteki / Korea: National Radio Research Agency Notice 2018-29 / United States: FCC Part 15 Class B			
Radio Compliance	Australia and New Zealand: 4268:2012 + a1:2013, MPE Standard 2014 Europe and United Kingdom: EN 300 220-1 V4.1:2012, EN 301 489-03 V1.6.1:2013 Japan: Radio/Telecom Biz Act, Giteki Korea: Ministry of Science and ICT Notice 2018-90 United States: FCC 15.247:2015, FCC 15.107:2015, FCC 15.109:2015			
Safety	Australia and New Zealand: 62368.1 Canada: cUL 60950-1 2nd Edition, cUL 62368-1 2nd Edition Europe and United Kingdom: IEC 60950-1 2nd Edition Japan and Korea: IEC 62368-1:2014 United States: UL 60950-1 2nd Edition, UL62368-1 2nd Edition			
ROHS	Europe and United Kingdom: EN IEC 63000:2018			

*Contact MultiTech for details related to China CN470 certifications

ORDERING INFORMATION

MultiTech xDot® Essential Models

Model	Description	Region
MTXDOT-NA1-B15-TR-400	xDot Essential with Trace Antenna and Tape and Reel Packaging. (400 quantity)	United States/Canada
MTXDOT-CN1-B15-TR-400	xDot Essential with Trace Antenna and Tape and Reel Packaging. (400 quantity)	China
MTXDOT-WW1-B15-TR-400	xDot Essential with Trace Antenna and Tape and Reel Packaging. (400 quantity)	Global*

MultiTech xDot® Advanced Models

Model	Description	Region
MTXDOT-NA1-B10-TR-400	xDot Advanced with UFL and Trace Antenna and Tape and Reel Packaging. (400 quantity)	United States/Canada
MTXDOT-CN1-B10-TR-400	xDot Advanced with UFL and Trace Antenna and Tape and Reel Packaging. (400 quantity)	China
MTXDOT-WW1-B10-TR-400	xDot Advanced with UFL and Trace Antenna and Tape and Reel Packaging. (400 quantity)	Global*

MultiTech xDot® Essential Developer Kits

Model	Description	Region
MTMDK-XDOT-NA1-B14	xDot Essential Developer Kit (3 Pk) (US915)	United States/Canada
MTMDK-XDOT-CN1-B14	xDot Essential Developer Kit (3 Pk) (CN470)	China
MTMDK-XDOT-WW1-B14	xDot Essential Developer Kit (3 Pk) (US915, AS923-1/2/3/4, AU915, EU868, IN865, KR920, RU864)	Global*

MultiTech xDot® Advanced Developer Kits

Model	Description	Region
MTMDK-XDOT-NA1-B10	xDot Advanced Developer Kit (3 Pk) (US915)	United States/Canada
MTMDK-XDOT-CN1-B10	xDot Advanced Developer Kit (3 Pk) (CN470)	China
MTMDK-XDOT-WW1-B10	xDot Advanced Developer Kit (3 Pk) (US915, AS923-1/2/3/4, AU915, EU868, IN865, KR920, RU864)	Global*

*Global Region: Australia, Canada, Europe, India, Japan, Korea, Russia, United Kingdom, United States

MultiTech xDot® Accessories

Model	Description	Region
AN868-915A-1HRA	868-915 MHz RP-SMA Antenna, 8" (3.0dBi)	Global
CARSMA-UFL	Reverse SMA-to-UFL Coax RF Cable, 6"	Global

Go to www.multitech.com for detailed product model numbers.
The LoRa name and associated logo are trademarks of Semtech Corporation or its subsidiaries.

Services & Warranty

MultiTech's comprehensive Support Services programs offer a full array of options to suit your specific needs. These services are aimed at protecting your investment, extending the life of your solution or product, and reducing total cost of ownership. Our seasoned technical experts, with an average tenure of more than 10 years, can walk you through smooth installations, troubleshoot issues and help you with configurations.

Technical Support Services

At MultiTech, we're committed to providing you personalized attention and quality service while providing you a quick response to your product support needs. We have several options of support for you to choose from.

For additional information on Support Services as well as other service offerings, please contact your MultiTech representative or visit www.multitech.com/support.go

Features and specifications are subject to change without notice.

Trademarks and Registered Trademarks: MultiTech and the MultiTech logo, xDot: Multi-Tech Systems, Inc. All other products and technologies are the trademarks or registered trademarks of their respective holders.

2025-05 • 86002274 • © 2025 Multi-Tech Systems, Inc. All rights reserved.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

