

# ASM400S / BSM400S


## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

The Astrodyne ASM (Class I input) and BSM (Class II input) 400 Series open frame power supplies are designed for medical applications. They operate over an input voltage range of 90 to 264 VAC, produce 400 Watts of regulated DC output power, and have 2 MOPP isolation and BF leakage current (select models having CF leakage versions). These power supplies are certified to be compliant with the latest edition of the international medical safety standard, IEC 60601-1 3rd Edition using the CB reporting scheme, as well as to be compliant with the collateral standard 60601-1-2 for EMC. The product label has the UL Recognized component marks for North America and the EU and



### HOW TO ORDER

#### A(B)SM400S-12-00C

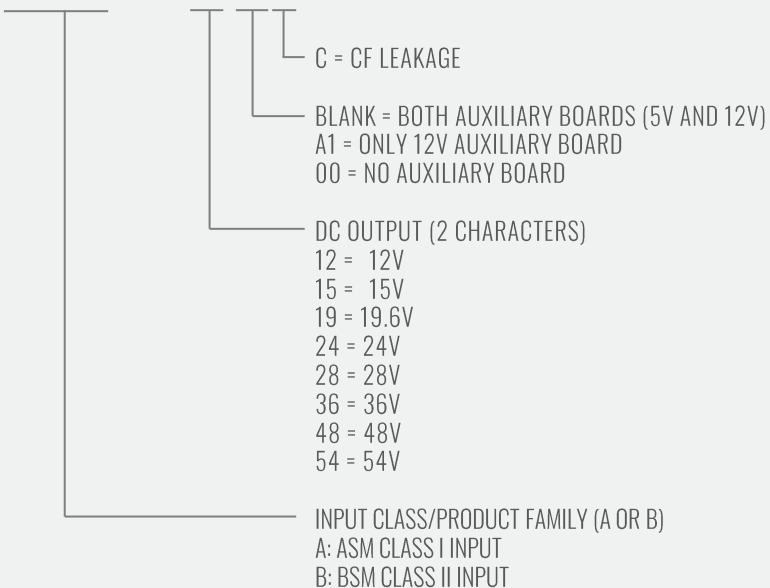

### FEATURES

#### UNIVERSAL AC INPUT

90-264 VAC INPUT, 50 / 60 Hz

#### OUTPUT

400 Watts forced air / 200 Watts natural convection  
Single output with 5V Auxiliary and 12V fan output  
Voltages from 12V to 54V

#### HIGH EFFICIENCY

Up to 92% @ 230Vac

#### HIGH POWER DENSITY

Up to 19W / Inch<sup>3</sup>

#### OPERATING TEMPERATURE

-20 to +40°C at Full Load with derating

#### AGENCY APPROVALS

AAMI ES60601-1: 2005 A1 2012  
CSA 22.2 60601-1 2014  
EN60601-1: 2006 3<sup>rd</sup> Edition A1 2013  
CB Scheme IEC 60601-1: 2005 A1 2012  
EN60601-1-2 Class B, EN55011 / A1 Class B  
2 MOPP  
Class 2 for home use medical applications (BSM400)

# ASM400S / BSM400S

## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

### INPUT SPECIFICATIONS

*All Specifications are typical at nominal input, full load, 25°C unless specified otherwise.*

|   |   |
|---|---|
| Input Voltage Range                       | 90-264 VAC  |
| Range of Nominal Input Voltages           | 100-240 VAC   |
| Input Frequency                           | 47-63 Hz (50 / 60 Hz Nom.)  |
| Input Current                             | 4.5 A Max at 115VAC<br>2.5A Max at 230VAC   |
| Inrush Current                            | 30A Max at 115VAC, 60 Hz<br>60A Max at 230VAC, 50 Hz  |
| Earth Leakage Current ASM400S             | 300uA Max at 264VAC, 50Hz   |
| Patient Leakage BF<br>*CF Leakage options | 100uA Max at 264VAC, 50Hz<br><i>*Designated voltages will meet CF Class B EMC, Class I or II input<br/>48V and 54V models will meet CF Class A EMC, Class I or II input</i> |
| Input Fusing                              | 8A fuse in both L and N lines   |
| Power Factor                              | 0.95 min., 230VAC 50Hz  |

### OUTPUT SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| Output Voltage                   | 12*V, 15*V, 19.6*, 24*V, 28*V, 36*V, 48V or 54V nominal                       |
| Output Power                     | 400 W Continuous – See temp. & Airflow derating curves                        |
| Minimum Load                     | No minimum load required  |
| Set Point Accuracy               | ± 1%  |
| Load Regulation                  | ± 1% Max, 0 to Full Load  |
| Line Regulation                  | ± 0.5% Max, 90 to 264 VAC   |
| Temp. Drift                      | ± 0.025 % / °C  |
| Transient Response<br>Excursion  | Less than ± 5%<br>50 to 100% Load Step<br>1A / us Slew Rate                   |
| Transient Response Recovery Time | 2ms Max<br>50 to 100% Load Step<br>1A / us Slew Rate                          |
| Ripple and Noise                 | 1% pk-pk Max. 20MHz BW<br>Measured with 47uF Alum and 0.1uF Ceramic at output |

### GENERAL SPECIFICATIONS

|                     |                                     |
|---------------------|-------------------------------------|
| Efficiency          | Refer to Ordering Information table |
| Standby Power       | <1W 230 VAC                         |
| Start-up Delay      | 2s maximum                          |
| Start-up Rise Time  | 50ms maximum                        |
| Hold-up Time        | 16ms typ. Full Load, 115VAC         |
| Power Density       | 19 W / in <sup>3</sup>              |
| Switching Frequency | 200 KHz typ.                        |
| MTBF                | 100K hrs. (typ.) per MIL-HDBK-217F  |

### ISOLATION

|                 |                 |
|-----------------|-----------------|
| Input to Output | 4000VAC, 2 MOPP |
| Input to Earth  | 1500VAC, 1 MOPP |
| Output to Earth | 500VAC          |

# ASM400S / BSM400S

## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

### PROTECTION

|                                    |  |
|------------------------------------|--|
| <b>Over Current Inception</b>      | 105 to 135% Rated Current                        |
| <b>Short Circuit</b>               | Hiccup Mode, Automatic recovery                  |
| <b>Over Voltage Protection</b>     | 130% Vo max.<br>Latching, Recycle Input to Reset |
| <b>Over Temperature Protection</b> | Automatic recovery                               |

### MECHANICAL

|                                |   |
|--------------------------------|---|
| <b>Size</b>                    | See Outline Drawings for mechanical options |
| <b>Weight</b>                  | 1lbs. (453.6g)                              |
| <b>Input Connector</b>         | Molex 41791                                 |
| <b>Input Mating Connector</b>  | Housing Molex 2139<br>Contact 2478          |
| <b>Output Connector</b>        | See Outline Drawings for mechanical options |
| <b>Output Mating Connector</b> | See Outline Drawings for mechanical options |

### ENVIRONMENTAL

|                              |   |
|------------------------------|---|
| <b>Operating Temp. Range</b> | -20 to +40°C at Full Load, to 50°C with derating (see graphs) |
| <b>Storage Temp. Range</b>   | -40 to +85°C  |
| <b>Humidity</b>              | 0 to 95%, non-condensing                                      |
| <b>Altitude</b>              | 0 to 10,000 ft.<br>0 to 3048 m                                |
| <b>Shock</b>                 | 30G pk. Half sine, 6 axis                                     |
| <b>Vibration</b>             | 2 G RMS, 5 Hz to 500 Hz<br>3 axis, 30 min                     |

### SAFETY CERTIFICATIONS

|                 |  |
|-----------------|--|
| <b>UL / cUL</b> | AAMI ES60601-1: 2005 A1 2012 / CSA 22.2 60601-1 2014                                   |
| <b>UL EU</b>    | EN60601-1: 2006 3 <sup>rd</sup> Edition A1 2013<br>CB Scheme IEC 60601-1: 2005 A1 2012 |

### EMC CERTIFICATIONS

|   |   |
|---|---|
| <b>Conducted Emissions</b>                  | EN60601-1-2 Class B<br>EN55011 / A1 Class B |
| <b>Radiated Emissions</b>                   | EN60601-1-2 Class B<br>EN55011 / A1 Class B |
| <b>ESD Susceptibility Air Discharge</b>     | EN61000-4-2 Criteria A Level 3              |
| <b>ESD Susceptibility Contact Discharge</b> | EN61000-4-2 Criteria A Level 2              |
| <b>Radiated Susceptibility</b>              | EN61000-4-3 Criteria A Level 2              |
| <b>EFT / Burst</b>                          | EN61000-4-4 Criteria A Level 3              |
| <b>Surge</b>                                | EN61000-4-5 Criteria A Level 2              |
| <b>Conducted Susceptibility</b>             | EN61000-4-6 Criteria A Level 2              |

All Specifications are typical at nominal input, full load, 25°C unless specified otherwise.

- ✓ For EMC Compliance, electrically bond four mounting holes to a conductive surface.
- ✓ \*Designated models will meet Class B when set to CF leakage; all other models only meet Class A when set to CF


# ASM400S / BSM400S

## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

### OUTPUT POWER DERATING

#### Natural Convection - Output Power vs. Ambient Temperature and Output Voltage


(Combined output power rating)

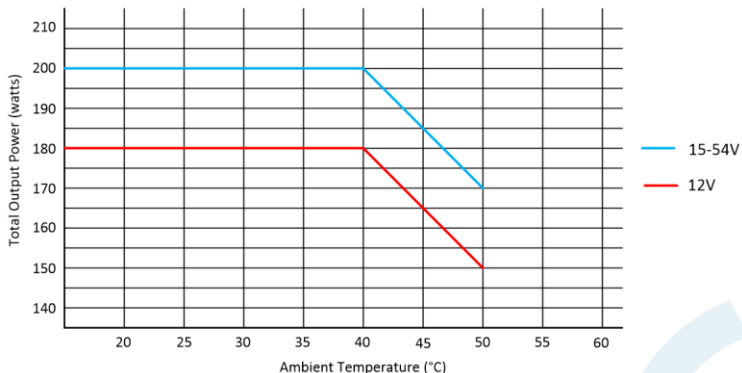


For proper airflow with natural convection cooling, 8mm min length spacers must be used to support the PCBA. A 50mm free air zone must be allowed around the other 5 surfaces of the power supply to allow free natural convection air circulation.

#### Forced Convection - Output Power vs. Ambient Temperature, Airflow and Input Voltage:

Power Rating at 90Vac for 12V

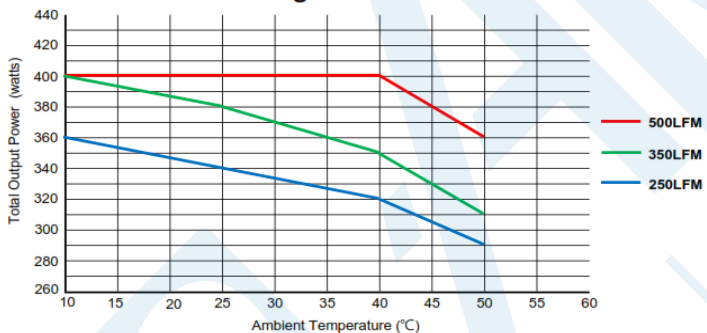


Power Rating at 100Vac for 12V

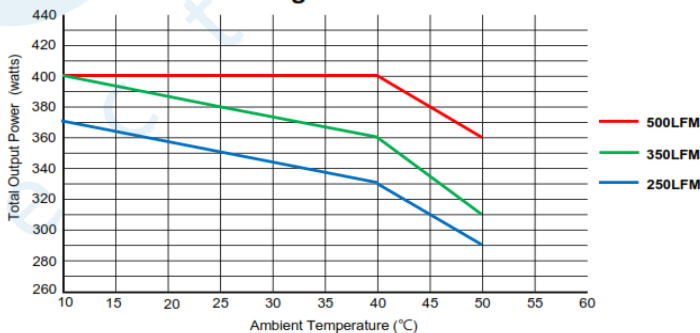


For proper airflow with forced convection cooling, 6mm min length spacers must be used to support the PCBA.

Power Rating at 120Vac for 12V

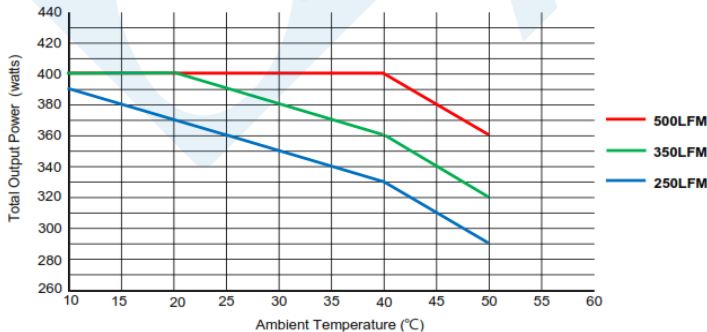

Power Rating at 230Vac for 12V

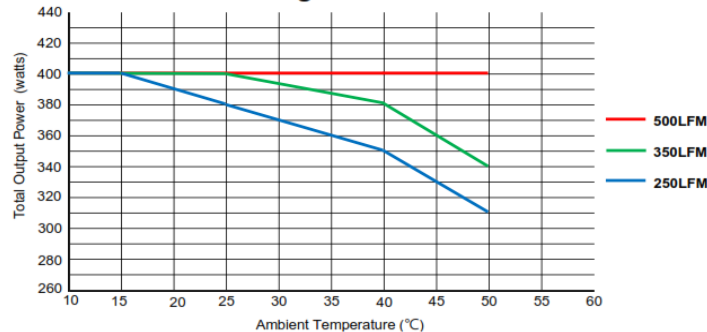


# ASM400S / BSM400S


## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

### OUTPUT DERATING


Power Rating at 90Vac for 24V & 54V

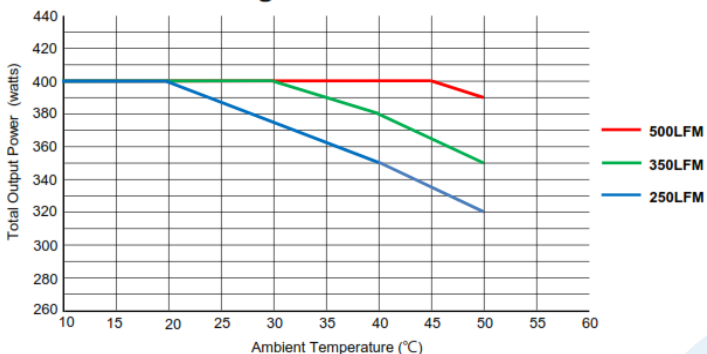


Power Rating at 100Vac for 24V & 54V

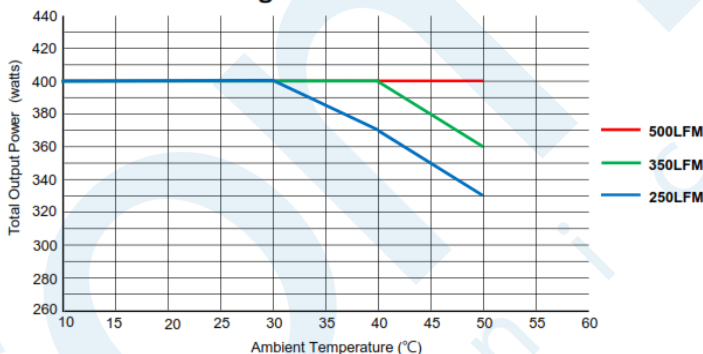


Power Rating at 120Vac for 24V & 54V

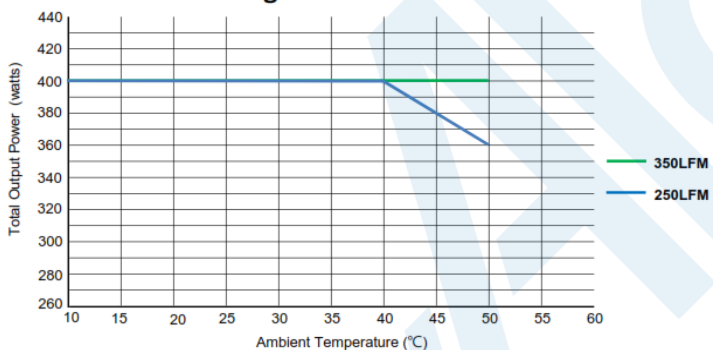

Power Rating at 230Vac for 24V & 54V

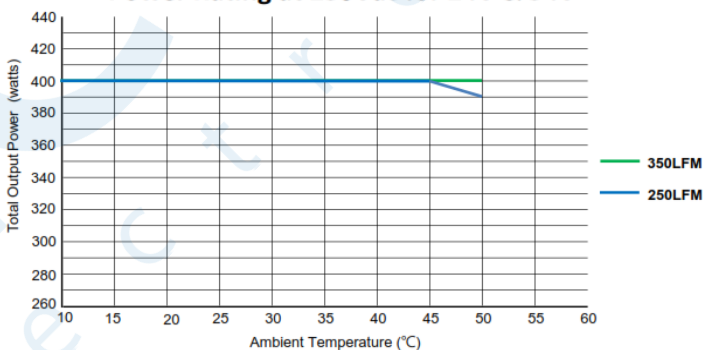

### AIRFLOW GUIDELINES

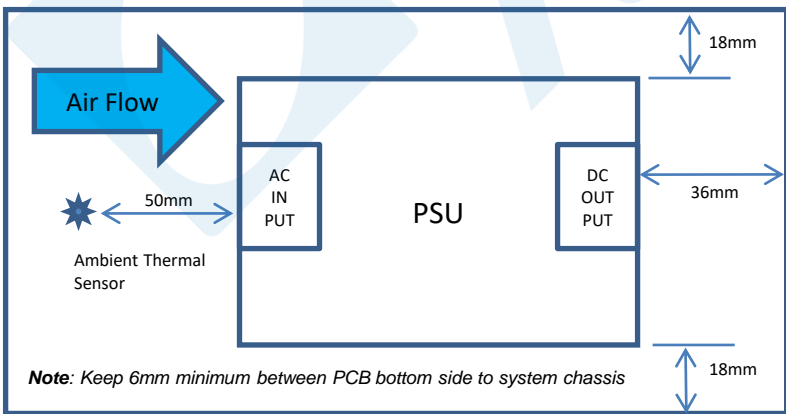


Notes:

1. PS-ON: Connect this signal to DC\_OUT\_RTN to enable the main and FAN outputs. The 5V\_AUX output is on when AC is applied. (Place a jumper across pins 3 and 4 on connector CN4)
2. PWR\_OK: Open collector logic goes to high 160ms (typ.) after the main output is regulated.
3. Contact the factory for a low-cost single-output PN option, without the auxiliary outputs.

# ASM400S / BSM400S

## 400W HIGH DENSITY MEDICAL / INDUSTRIAL GRADE OPEN FRAME POWER SUPPLIES

### MECHANICAL DRAWING

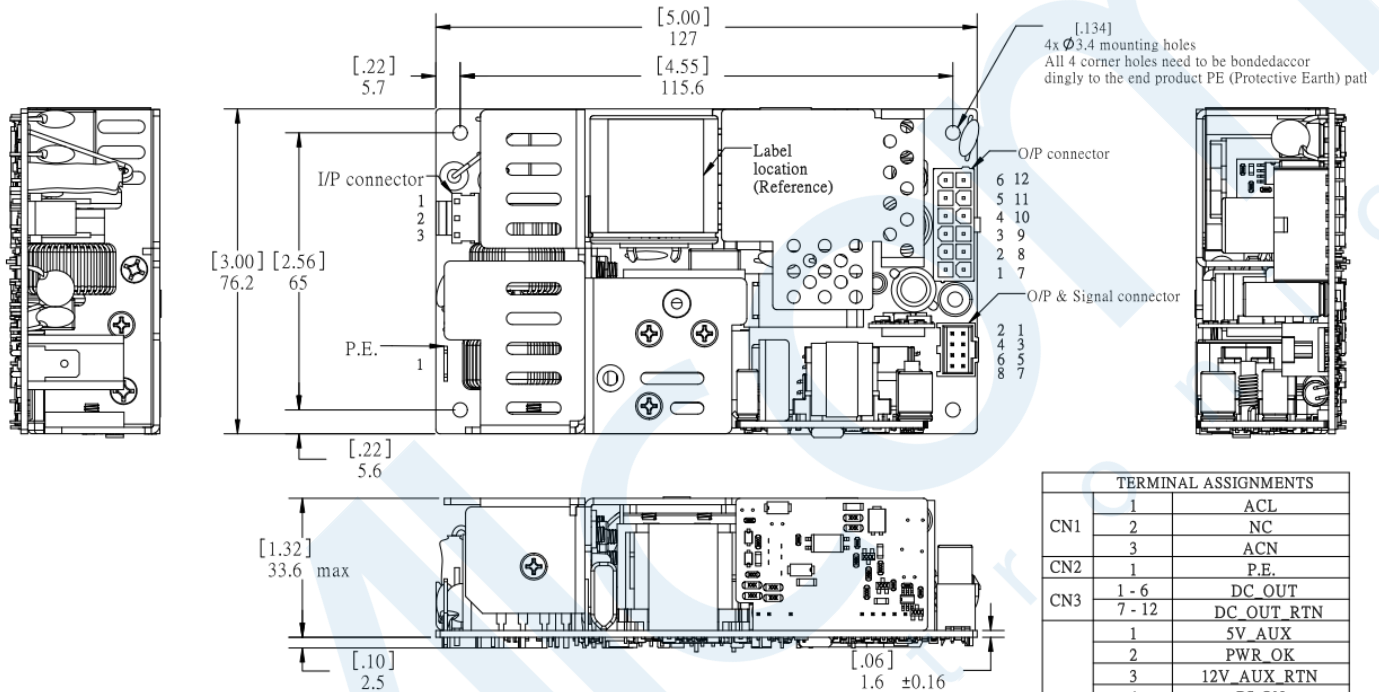

| TERMINAL ASSIGNMENTS |        |               |
|----------------------|--------|---------------|
| CN1                  | 1      | ACL           |
|                      | 2      | NC            |
|                      | 3      | ACN           |
| CN2                  | 1      | P.E.          |
|                      | 1 - 6  | DC OUT        |
| CN3                  | 7 - 12 | DC OUT RTN    |
|                      | 1      | 5V_AUX        |
| CN4                  | 2      | PWR_OK        |
|                      | 3      | 12V_AUX RTN   |
|                      | 4      | PS-ON         |
|                      | 5      | +REMOTE SENSE |
|                      | 6      | -REMOTE SENSE |
|                      | 7      | 12V_AUX       |
|                      | 8      | 5V_AUX RTN    |

| Connector P/N info. for reference.                |                                       |
|---|---------------------------------------|
| I / P : Molex 41791 series or equivalent          | Mating Connector : Molex 41695 series |
| O / P : Molex 5566 series or equivalent           | Mating Connector : Molex 5557 series  |
| O / P & Signal : Molex 90130 series or equivalent | Mating Connector : Molex 90142 series |

- Notes:
- All dimensions in mm (in.)
  - Maximum Dimensions:  
Length and Width Tolerance is ± 0.2 (0.008)  
Maximum Height: 36.1 (1.42)

| MODEL          | OUTPUT VOLTAGE | OUTPUT CURRENT, A<br>FORCED / NATURAL<br>CONVECTION | 5V AUX, A<br>FORCED / NATURAL<br>CONVECTION | 12V FAN, A<br>FORCED / NATURAL<br>CONVECTION | EFFICIENCY, TYP.<br>230 / 115VAC |
|----------------|----------------|---|---|--|----------------------------------|
| A(B)SM400S-12* | 12 VDC         | 33.3/15.0   | 2A/1A                                       | 1A/0.5A                                      | 90/86                            |
| A(B)SM400S-15* | 15 VDC         | 26.7/13.3   | 2A/1A                                       | 1A/0.5A                                      | 90/86                            |
| A(B)SM400S-19* | 19.6VDC        | 21.1/10.2   | 2A/1A                                       | 1A/0.5A                                      | 91/86                            |
| A(B)SM400S-24* | 24 VDC         | 16.7/8.3  | 2A/1A                                       | 1A/0.5A                                      | 91/88                            |
| A(B)SM400S-28* | 28 VDC         | 14.3/7.15   | 2A/1A                                       | 1A/0.5A                                      | 91/88                            |
| A(B)SM400S-36* | 36 VDC         | 11.1/5.6  | 2A/1A                                       | 1A/0.5A                                      | 91/88                            |
| A(B)SM400S-48  | 48 VDC         | 8.3/4.2   | 2A/1A                                       | 1A/0.5A                                      | 91/88                            |
| A(B)SM400S-54  | 54 VDC         | 7.4/3.7   | 2A/1A                                       | 1A/0.5A                                      | 91/88                            |