

Features

- 10.1" ARM Based HMI
- NXP i.MX8M Plus Quad, 4 x Cortex-A53 processor
- Onboard 4GB LPDDR4 DRAM
- Onboard 16GB eMMC Flash
- Fanless Design
- Flat Front Panel Touch Screen
- DC 24V Power Input

Specifications

System	
Processor	NXP i.MX8M Plus Quad, 4 x Cortex-A53 up to 1.6GHz
Memory	Onboard 4GB LPDDR4 SDRAM

External IO Port	
USB	1 x USB 3.0/ USB2.0, via Vertical USB type A port 1 x USB Download Mode via Micro USB port
Serial Port & CAN Bus	1 x Pitch 3.5 mm 2 x 5-pin Terminal Block with 1 x RS-232(RX,TX,RTS,CTS)/ 2W RS-485(D+,D-), select via jumper 1 x 2W RS-485(D+,D-) 1 x CAN bus 2.0b (CAN_H,CAN_L)
LAN	2 x GbE LAN *LAN1 Support PoE (optional)
Wireless Communication (optional)	4G LTE WiFi/ Bluetooth


Storage Space	
Storage	Onboard 16GB eMMC Flash 1 x Micro SD slot

Display	
Display Type	10.1" TFT-LCD
Max. Resolution	1280 x 800
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	170(H)/170(V)
Contrast	500:1
Backlight Lifetime	30,000 hrs

Touch Screen	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	Around 90%

Power	
Power Input	DC 24V
PoE Input (optional)	Support PoE+ (IEEE 802.3AT) Power Device

Dimensions

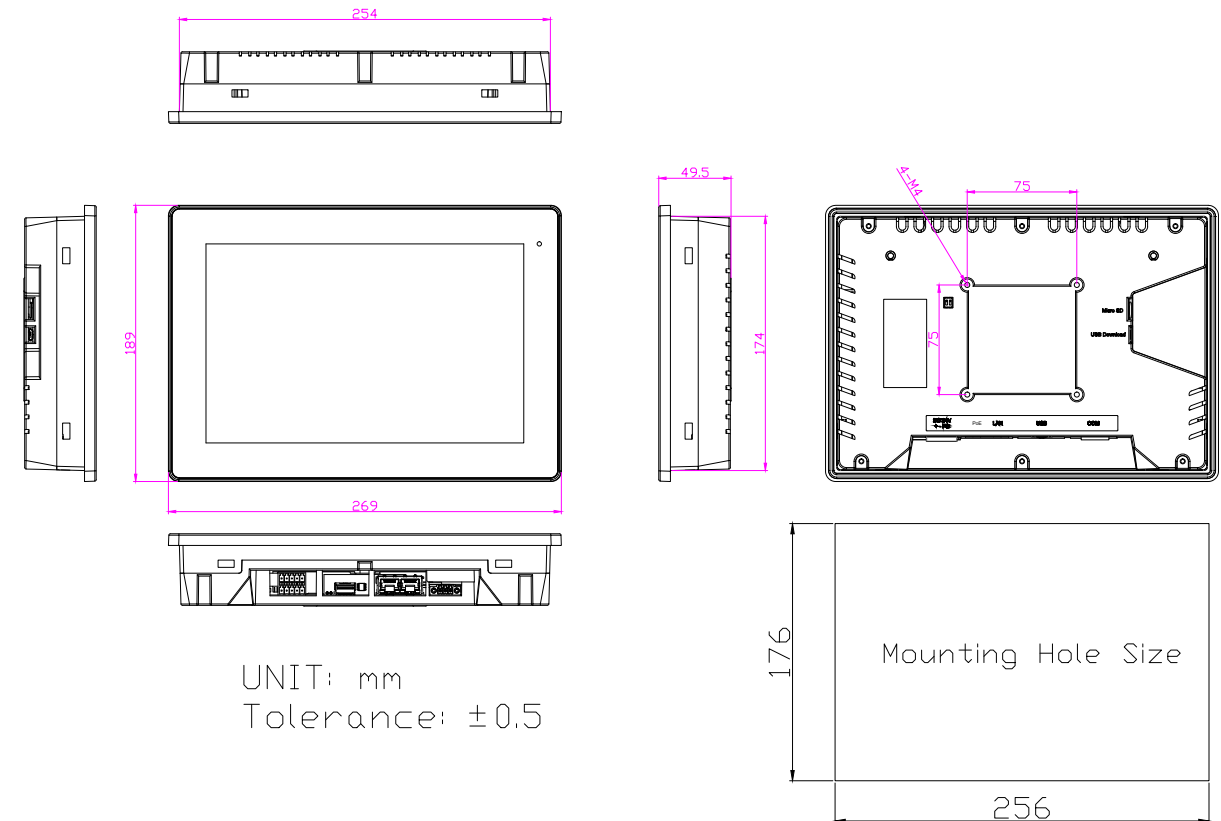

Mechanical	
Construction	Engineering Plastic
Mounting	Panel Mount, VESA 75 x 75
IP Rating	IP65 Compliant Front Bezel
Dimensions	269 x 189 x 49.5 mm
Net Weight	0.9 kg

Environmental	
Operating Temperature	0~50°C / -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 95% @ 40°C, non-condensing
Vibration	1G/ 5~500Hz (Random) / operation
Shock	15G Peak Acceleration (11 msec. duration) / operation
Certificate	CE/FCC Class A, UKCA, RoHS 2.0/ REACH

Operating System Support	
Android 11, Yocto Linux 4.0 (Kirkstone)	



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl