




# OFM-121 Series



## Open-Frame Industrial Monitor



### Features

- High contrast color TFT-LCD Monitor support resolution up to 1024\*768
- Advanced OSD control
- High brightness with 1000/1500 nits for outdoor applications
- Steel frame for various applicatiios
- **Operating temperature: -30 ~85°C**



## Specification

### Display

Model	OFM-121S	OFM-121A	OFM-121H
Screen Size	12.1" LED Panel	12.1" LED Panel	12.1" LED Panel
Resolution	1024 x 768	1024 x 768	1024 x 768
View Angle	80°/80°/80°/80° (R/L/U/D)	80°/80°/80°/80° (R/L/U/D)	80°/80°/80°/80° (R/L/U/D)
Brightness	500 cd/m <sup>2</sup>	1000 cd/m <sup>2</sup>	1500 cd/m <sup>2</sup>
Color Support	16.7M	16.7M	16.7M
Contrast Ratio	700:1	700:1	700:1
Response Time	35(msec)	35(msec)	35(msec)
Backlight Life	50,000hrs	50,000hrs	50,000hrs

### TouchScreen(Optional)

T/S Type	4-Wire Resistive Touchscreen / Projected Capacitive Touchscreen		
Surface Hardness	3H / 6H	3H / 6H	3H / 6H
Transparency	80% / 85%	80% / 85%	80% / 85%

### Environmental

Operating Temp.	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)
Storage Temp.	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)
Humidity	5~90%, 40°C	5~90%, 40°C	5~90%, 40°C

### I/O Ports

Video Port	1 x VGA video input 1 x DVI video input 1 x HDMI	1 x VGA video input 1 x DVI video input 1 x HDMI	1 x VGA video input 1 x DVI video input 1 x HDMI
Audio	Yes	Yes	Yes

### Qualification

Certification CE, FCC Class A


### Power Requirement

Power Input	DC 12V / 4.16A input	DC 12V / 4.16A input	DC 12V / 4.16A input
Power Consumption	Max. 12W	Max. 12W	Max. 12W

## OSD Key

<b>Buttons</b>	Yes (with 5 physical buttons to control the device) 1 x Power key; 1 x Menu key; 1 x Auto key; 2 x Arrow key
----------------	---

## Dimensions

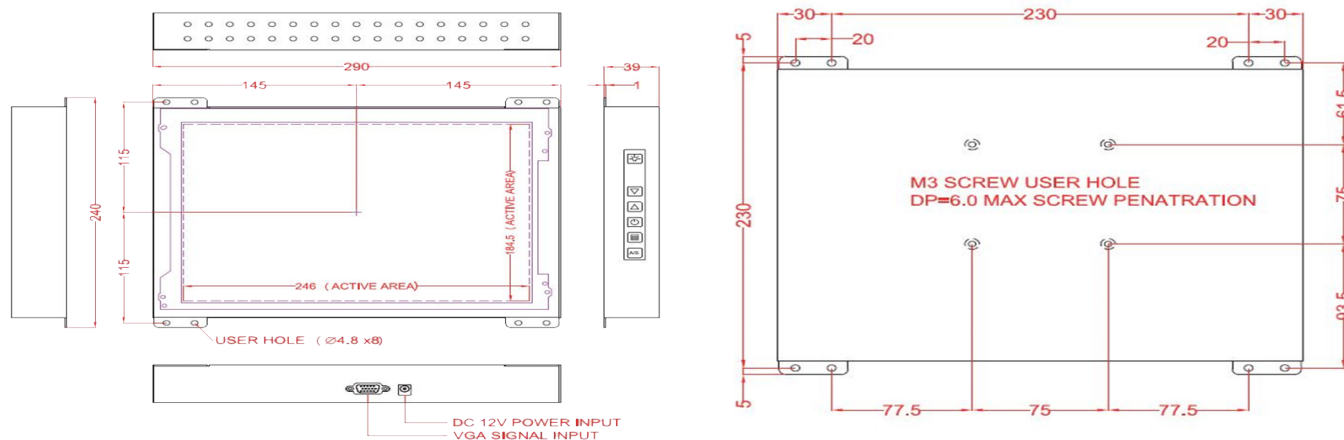

## Ordering Information

<b>OFM-121S</b>	12.1" LCD Open Frame Monitor, XGA, 500cd/m2, non-Touch
<b>OFM-121A</b>	12.1" LCD Open Frame Monitor, XGA, 1000cd/m2, non-Touch
<b>OFM-121H</b>	12.1" LCD Open Frame Monitor, XGA, 1500cd/m2, non-Touch

## Optional Accessories

**Power Cord (US Plug)** Power Cord / 1.8M, W/3-pin plug, US Plug

**Power Cord (EU Plug)** Power Cord / 1.8M, W/2-pin plug, EU Plug



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33  
 info@alcom.be | www.alcom.be  
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands  
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl