



SB-R64X-W44A

Industrial Fanless PC w/ Intel® Celeron® J6412 CPU Elkhart Lake Processor



Features

- Intel® Celeron® J6412 CPU Elkhart Lake
- 1 x SDRAM DDR4 3200 MHz (max. 32G)
- Support 4 Gigabit LAN
- Support DP/HDMI Triple display
- Support SATA/M.2 SSD, M.2 WiFi, Mini-PCIe
- 12~24V power input, lockable DC-IN phoenix connector
- Over-voltage power input protection
- Reversed power input protection

System

CPU	Intel® Celeron® J6412 CPU Elkhart Lake(2.0 GHz/2.6GHz)
Memory	1 x SDRAM DDR4 3200 MHz (max. 32G) 4GB DDR4 SO-DIMM pre-installed
Graphics	Intel® UHD Graphics for 10 th Gen Intel® Processors
LAN chipset	Intel I210AT, Intel I226-V
Watchdog Timer	Programmable 255 levels timer interval, from 1~255 sec/min

Storage

Device	1 x SATA 3.1 (2.5" HD) 1 x M.2 2242 (SATA3.0) 128GB M.2 SSD pre-installed
--------	---

Audio

Type	1 x Audio(Line-out & Mic-in) Chip 888S/897
------	--

Power System

Power Input	12-24V DC, 2-pin phoenix connector
-------------	------------------------------------

OS

Windows 10, Ubuntu 20.04

Qualification

Certification	CCC, CE, FCC
---------------	--------------

External I/O

Serial Ports	2 x RS232/RS422/RS485 (default RS-232) with auto flow control 2 x RS485 2 x RS232 (optional by internal pin head)
USB Ports	2 x USB3.1 4 x USB2.0 1 x USB2.0 (for security dongle)
LAN	4 x RJ45
Video Ports	1 x HDMI up to 4096 x 2160 @ 24 Hz 1 x DP up to 4096 x 2160 @ 60 Hz
GPIO Remote	1 x 8bit programmable GPIO (default 3.3V, 5V optional) (optional by internal pin head)
Remote	1 x SW
Indicators	1 x Power LED(Green for Power-on, Blink for Sleep mode, Off for Power-off)

Internal I/O

Expansion Slot	1 x Mini-PCIe slot (PCIe/ USB2.0 signal supported) 1 x E-Key M.2 2230 slot (PCIe/USB2.0 signal supported) 1 x M.2 2242 SSD slot(SATA signal supported)
SIM Card	1 x SIM Card socket for 3G/4G module


Mechanical

Button	1 x Power button
Chassis	Aluminum Alloy
Dimension (W x H x D)	200 x 153 x 52.8 mm
Weight (Net)	1.5kg

Environmental

Operating Temp.	-10 ~ 60°C
Storage Temp.	-40 ~ 85°C
Operating Humidity	5 ~ 95% (non-condensing)
Random Vibration	5~500Hz, 2Grms, operation
Shock	Operation: 10G@11ms Non-operation: 30G@11ms
ESD	Contact 6KV, Air 10KV

Dimensions

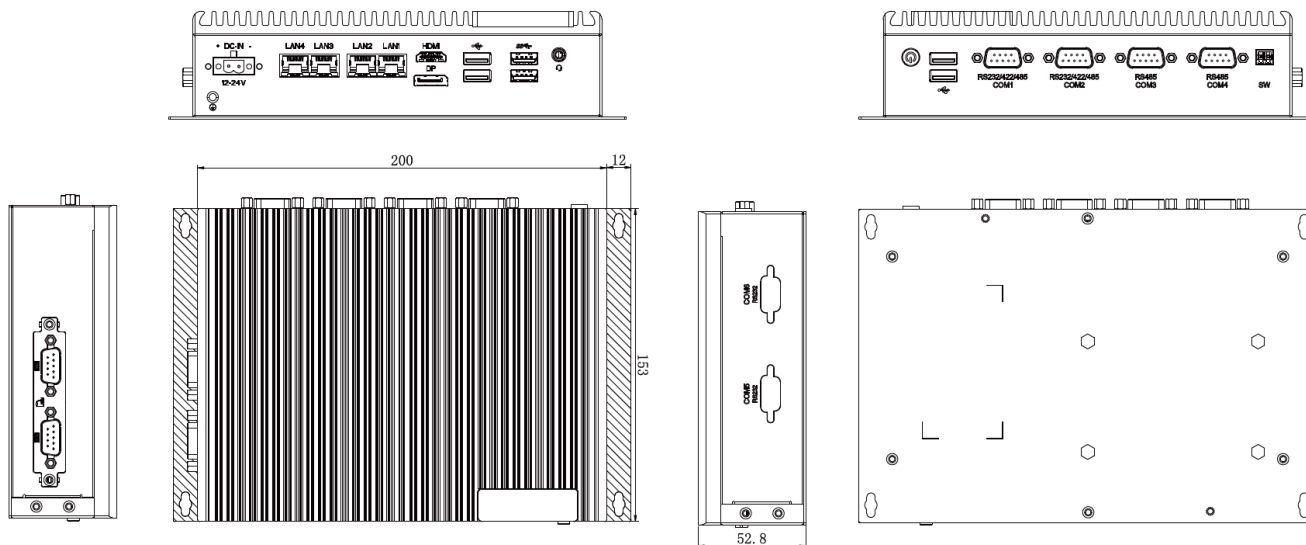

Ordering Information

SB-R64X-W44A-R4S128 Fanless System with 4GB RAM & 128GB SSD, Intel Celeron Elkhart Lake J6412, 4xLAN, 4xCOM(up to 6), 6xUSB, 1xHDMI, 1xDP, DC 12-24V power input



AC-DC Power Adapter (US) Input: 100V-240V, Output: 12V/5A; W/2-pin Terminal Block with screws, US Plug

AC-DC Power Adapter (EU) Input: 100V-240V, Output: 12V/5A; W/2-pin Terminal Block with screws, EU Plug



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl