


Embedded Industrial

Sunlight Readable Display Modules

Arestech



KEY Features

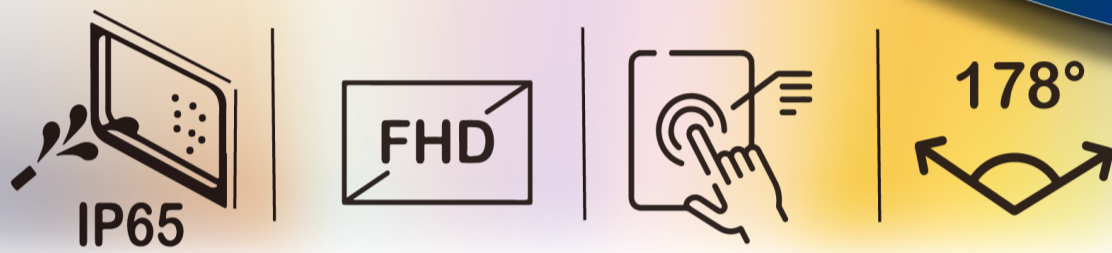

Selection Guide for [Sunlight Readable Touch Monitor]

Model No.	Screen Size	Aspect Ratio	Brightness	Resolution
SM-110P / VM-2100	10.4"	4 : 3	1600 nits	XGA (1024 x 768)
SM-112P / VM-2100	12.1"	4 : 3	1500 nits	XGA (1024 x 768)
SM-115P / VM-2100	15"	4 : 3	1500 nits	XGA (1024 x 768)
SM-115PW / VM-2100	15.6"	16 : 9	1600 nits	FHD (1920 x 1080)
SM-117P / VM-2100	17"	5 : 4	1500 nits	SXGA (1280 x 1024)
SM-119P / VM-2100	19"	5 : 4	1600 nits	SXGA (1280 x 1024)
SM-121PW / VM-2100	21.5"	16 : 9	1500 nits	FHD (1920 x 1080)
SM-124PW / VM-2100	24"	16 : 9	1500 nits	FHD (1920 x 1080)

Selection Guide for [Modular Panel PCs]

Model No.	Screen Size	Processor	GbE	GPIO	Multi-Display	HDD	COM	USB
SM-110P / PM-2000	10.4"	Intel® Celeron® J1900	x 2 Intel® i210 - AT	x 4 DI x 4 DO	1 x VGA 1 x DP	x 1 Removable	x 2 RS 232/422/485	x 5 1 x USB 3.1 Gen 1 4 x USB 2.0
SM-112P / PM-2000	12.1"							
SM-115P / PM-2000	15"							
SM-115PW / PM-2000	15.6"							
SM-117P / PM-2000	17"							
SM-119P / PM-2000	19"							
SM-121PW / PM-2000	21.5"							
SM-121PW / PM-2000	24"	Intel® 9th/8th LGA 1151	x 3 1x Intel® i219-LM 2x Intel® i210 - AT	x 8 DI x 8 DO	1 x VGA 1 x DP 1 x DVI	x 2 1 x Removable 1 x Internal	x 6 RS 232/422/485	x 8 6 x USB 3.2 2 x USB 2.0
SM-115PW / PM-3100	15"							
SM-119P / PM-3100	19"							
SM-121PW / PM-3100	21.5"							
SM-124PW / PM-3100	24"							



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl