


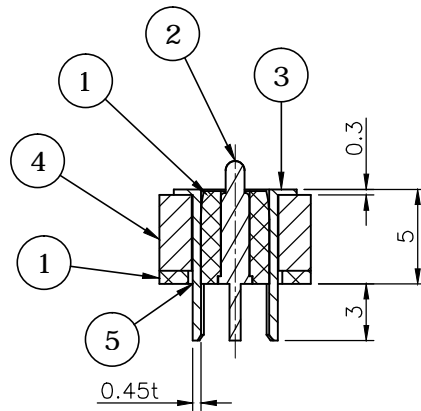
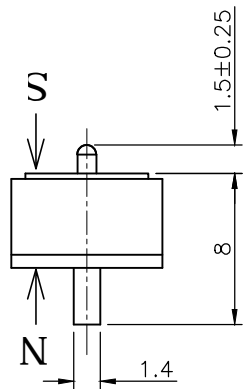


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/10

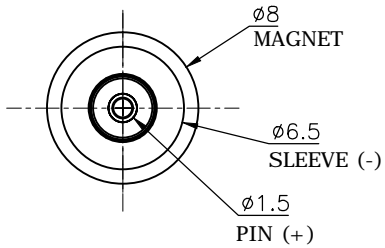


RECOMMENDED LAYOUT
GENERAL TOLERANCE: ±0.05mm

SPECIFICATION:

1. Contact Resistance: 50mΩ
2. Contact Force: 80g±20g at 1.1 working stroke
3. Durability: 20,000 Cycle Min.
4. Operating Temperature Range: -30°C~ +60°C
3. Soldering by manual only

303D-D080F02	2A	12VDC	200g
Match P/N	Current	Voltage	Magnetic Adsorption Force

5	GLUE	LSR-67
4	MAGNET	N52 NdFeB, Nickel plating
3	SLEEVE	Lead Free Brass, Nickel plating
2	POGO PIN	Lead Free Brass, 10u" Gold plating, over Nickel
1	HOUSING	HTN, UL94V-0, Black
NO.	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	SIZE	LINEAR ANGLES
mm	0-6	±0.1
	6-30	±0.2
	30-150	±0.3
		±2°
 www.attend.com.tw		
DRAWN	Fros	2022/03/10
CHECKED	Tim	2022/03/10
APPROVED	Ken	2022/03/10
DRAWN NAME:		Pogo Pin Magnet Type, 2P
		8.0D, DIP, 10u", 200g, 2A, black
PRODUCT NO.		303D-D080M02
SCALE	SHEET	SIZE
2.5	1/1	A4
FILE NAME		303D-D080M02_B_1



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl