


HPM-GNRUA

Single Intel®Xeon® 6 Processor ATX Server Board
with IPMI2.0. Processor supports up to 350W TDP

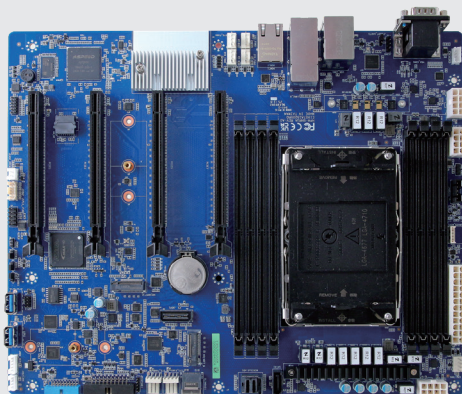

Features

- Intel LGA4710 Socket supports Intel® Xeon® 6 6500P & 6700P series Processor (Max. TDP at 350W)
- 8 x DDR5 6400 MHz RDIMM & 8000 MHz MRDIMM up to 2TB
- TPM 2.0 onboard
- IPMI 2.0 with AST 2600 BMC controller onboard
- 1 x Intel I210AT 1GbE controller
- 1 x Intel E610-XAT2 10GbE controller supports 2 x 10GbE Ethernet ports
- 5 x SATA III (1 x MiniSAS HD 4i (for 4x SATA Only) & 1 x 7 pin SATA connector)
- 1 x RS232 port, 2 x USB 3.2 Gen1 ports at Edge I/O
- 2 x M.2 M-Key slots PCIe 5.0 x4 NVMe SSD 2260/2280/22110 form factor
- 12" x 9.6" (304.8mm x 243.84mm), PCB thickness is 2.59 mm



Intel®Xeon® 6
Processor



8 x DDR5
RDIMM 6400MHz
& MRDIMM
8000MHz



IPMI 2.0
Supported



10GbE



PCIe Gen5
Multiple
Expansion

Specifications

System Information

Processor	Intel LGA4710 Socket supports Intel® Xeon® 6 6500P & 6700P series Processor (Max. TDP at 350W)
System Memory	8 x DDR5 6400 MHz RDIMM & 8000 MHz MRDIMM Up to 2TB
Watchdog Timer	System reset event 0 ~ 6553 seconds
BIOS	AMI UEFI BIOS
H/W Status Monitor	CPU temperature Fan speed and voltage monitoring Fan speed control Case open detection
TPM	TPM 2.0 onboard
IPMI	IPMI 2.0 with AST 2600 BMC controller onboard

Rear I/O

USB	2 x USB 3.2 Gen1 ports
COM Port	1 x RS232 port
RJ-45	4 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shared with IPMI access LAN2 and 3 ports for 10GbE
VGA	1 x VGA port

Display

Graphic Chipset	AST2600 BMC controller
Resolution	1 x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp

Expansion

Expansion	4 x PCIe Gen5 x16 slots Slot 1, PCIe Gen5 x16 Slot 2, NA Slot 3, PCIe Gen5 x16 Slot 4, NA Slot 5, PCIe Gen5 x16 Slot 6, NA Slot 7, PCIe Gen5 x16 (This Slot is closest to the CPU)
-----------	---

Storage

M.2	2 x M.2 M-Key slots to support 1 x PCIe 5.0 x4 NVMe SSD from 1st CPU 2260/2280/22110 form factor
-----	--

I/O

USB	4 x Internal USB 3.2 Gen1 ports
SATA	5 x SATA III (1 x Mini-SAS HD 4i (for 4 x SATA only) & 1 x 7pin SATA connector)
Serial	1 x Internal RS232 port
Other	1 x Slim SAS 4i (SFF-8654) connector
CMOS Battery	1 x Horizontal Socket Type CMOS Battery Holder with CR2450

Ethernet

LAN Chipset	1 x Intel I210AT 1GbE controller 1 x Intel E610-XAT2 10GbE controller supports 2 x 10GbE Ethernet ports
LAN Port	4 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shared with IPMI access LAN2 and 3 ports for 10GbE

Mechanical & Environmental

Operating Temp.	0 °C to 60 °C (without Intel E610-XAT2) 0 °C to 55 °C (with Intel E610-XAT2)
Storage Temp.	-40 °C to 85 °C
Operating Humidity	40°C 95% non-condensing
Dimension (L x W)	12" x 9.6" (304.8mm x 243.84mm), PCB thickness is 2.59mm


Software Support

OS	Windows 11 SAC and LTSC Windows Server 2025 Ubuntu Red Hat Enterprise Linux (RHEL)
----	---



Singel 3 | B-2550 Kontich | Belgium | Tel.+32(0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel.+31(0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Mechanical Drawing

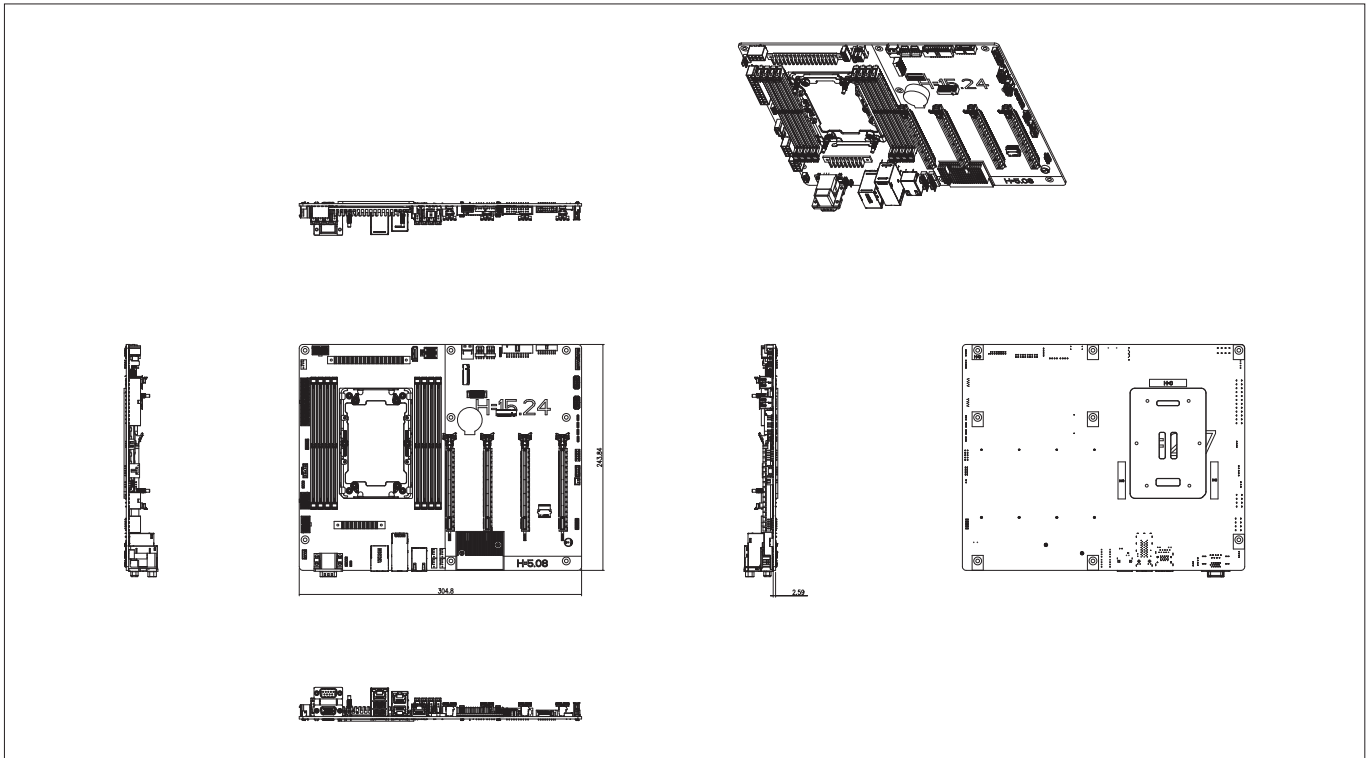

Ordering Information

Model Name	P/N	CPU	Chipset	Memory	PCIe Slot	10GbE/2.5GbE/1GbE	M.2	USB 3.2 Gen2/USB 3.2 Gen1/USB 2.0	TPM 2.0
HPM-GNRUA	HPM-GNRUAA-A1R	1	NA	8	4	2/0/1	2	0/6/0	1
HPM-GNRUA	HPM-GNRUAL-A1R	1	NA	8	4	0/0/1	2	0/6/0	1


Packing List

Item	P/N	Quantity
HPM-GNRUA motherboard	HPM-GNRUAA-A1R	1
HPM-GNRUAA I/O shield	E195BKHPNRUA00R	1
LGA4710 CPU carrier-E2B	E199TR00082R	1

CPU Support List (HPC Only)

SKU	Launch Date	# of Cores	# of Threads	Processor Base Frequency	Max Turbo Frequency	TDP (W)
Intel® Xeon® 6740P	Q1,25	48	96	2.1 GHz	3.8 GHz	270
Intel® Xeon® 6781P (Only HPM-GNRUA use)	Q1,25	80	160	2.0 GHz	3.8 GHz	350
Intel® Xeon® 6530P	Q1,25	32	64	2.3 GHz	4.1 GHz	225
Intel® Xeon® 6520P	Q1,25	24	48	2.4 GHz	4.0 GHz	210
Intel® Xeon® 6731P (Only HPM-GNRUA use)	Q1,25	32	64	2.5 GHz	4.1 GHz	245
Intel® Xeon® 6521P (Only HPM-GNRUA use)	Q1,25	24	48	2.6 GHz	4.1 GHz	225
Intel® Xeon® 6736P	Q1,25	36	72	2.0 GHz	4.1 GHz	205
Intel® Xeon® 6517P	Q1,25	16	32	3.2 GHz	4.2 GHz	190
Intel® Xeon® 6515P	Q1,25	16	32	2.3 GHz	3.8 GHz	150
Intel® Xeon® 6505P	Q1,25	12	24	2.2 GHz	4.1 GHz	150

Block Diagram

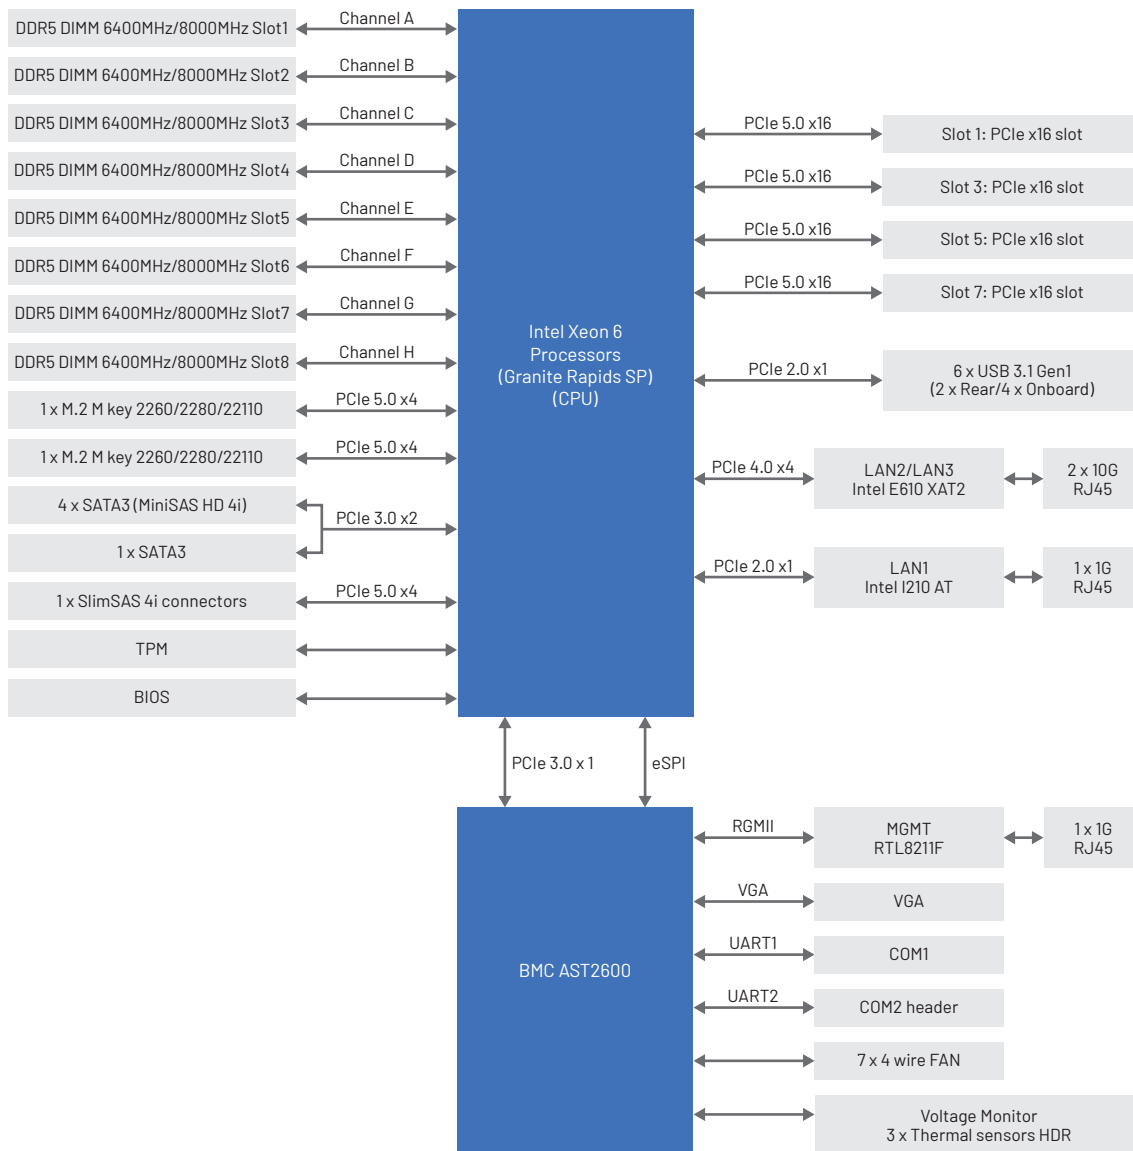

I/O Overview

