



Technical Specification Document

C41QS

Cat NB2 Module

CAVLI
wireless

C41QS

PN: C41QS - XXXX

SN: XXXXXXXX

IMEI: XXXXXXXXXXXXXXXX



LTE Cat NB2



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl




Cavli
C Series

Cavli C-Series C41QS Module



Cat NB2 Module

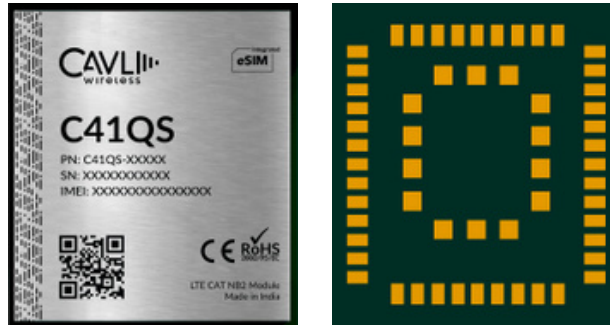

C41QS is an Cat NB2 Module compatible with 3GPP E-UTRA Release 14 standards supporting frequency bands B1/B2/B3/B4/B5/B8/B12/B13/B14/B17/B18/ B19/B20/B25/ B26/B28/B66/B70/B85 making it usable globally while consuming very low power. The module comes in a compact form-factor of 17.7mm x 15.8mm x 2.0mm ideal for size constrained applications. The module supports an optional integrated GNSS, and eSIM enabling Global Connectivity and Device management features powered by Cavli Hubble platform.

C41QS is ideal for applications that demand low space, low power consumption and aggressive pricing. It is suited for applications such as smart metering, smart parking, sensor and monitor- ing applications etc.

Key features



Cat NB2



Ultra-Low
Power Consumption



LGA Package



Compact Form
Factor Design



Cavli Hubble
Platform



Integrated GNSS

C41QS

Basic Information

Region	Global
CPU	ARM Cortex M3 @ 204MHz clock
Memory	4 MB Flash + 272 KB RAM
OS	Free RTOS
Package	LGA
Dimensions	17.7 x 15.8 x 2.0 mm
Weight	TBD
Operating Temperature	-35°C to +75°C
Extended Operating Temperature	-40°C to +85°C
Pin Count	58

Radio Frequency Bands

RAT	Cat NB2
Transmission Rates (Peak)	Cat NB2: Peak DL 127 Kbps & UL 158.5Kbps
LTE Band List	B1/B2/B3/B4/B5/B8/B12/B13/B14/B17/B18/B19/ B20/B25/B26/B28/B66/B70/B85
3GPP Release	14

GNSS Capability

Constellations	GPS/ BeiDou SBAS + QZSS Capable
----------------	---------------------------------

Network Protocols

Internet Protocols	HTTP(S), TCP(S), UDP, MQTT(S)
--------------------	-------------------------------

Interfaces

UART	x3
GNSS UART*	x1
USIM (DSSS) (1.8V / 3.0 V)	x1
SWD	x1
Network Status Indicator	x1
Power ON Status Indicator	x1
ADC	x1
SPI**	x1
GPIO**	x2
Main ANT	x1
GNSS ANT*	x1

* Optional

** Needs SDK. Not available currently

*** In Progress



Electrical Characteristics

Operating Voltage	Range: TBD Typical: TBD
TxD Idle	TBD
DRx Mode (Avg)	TBD
eDRx Mode (Avg)	TBD
Power Saving Mode	TBD
Dormant Mode	TBD
GNSS (Fix)	TBD

Driver Support

USB Driver	TBD
------------	-----

Certifications

Regulatory	Global: GCF*** Europe: CE*** UK: UKCA*** South Korea: KC***
Carrier	Verizon*** /AT&T*** /T-Mobile***
Others	RoHS/REACH

Other Features

Integrated GNSS	Optional
Integrated eSIM + Hubble Connectivity and Device Management Access	Optional
Mini-PCIe form factor	Optional

* Optional

** Needs SDK. Not available currently

*** In Progress

This document is a pre-release version. Some of the technical specifications are subject to change.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Cavli Inc. All rights reserved. No portions of this document may be reproduced without prior written consent of Cavli Inc. Specifications are subject to change without notice. Cavli, the Cavli logo are trademarks or registered trademarks of Cavli Inc. in the United States and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such.

For more information

Contact : sales@cavliwireless.com | Visit : www.cavliwireless.com

