

## 5050 STRIP LED 84 LED/m 16,8W/m 5m DOT FREE RGB DMX (10mm)

### DATI TECNICI / SPECIFICATIONS:

**LED:** 84 LED/m  
**Strip dimension:** 15 x 10 x 5000 mm  
**Working voltage:** 24VDC  
**IP:** 65  
**Power:** 16,8W/m  
**Luminous flux:** 170 lm/m  
**Module dimension:** 83,5 mm  
**LED distance:** 11,9 mm  
**Working temp.:** -20 +45°C  
**Stocking temp.:** 0 +60°C





**IP67 AVAILABLE**

**LIFETIME EXPECTANCY**  
 (L<sub>80B10</sub>) 40000 h @ T55°C

Garanzia / Warranty **3 anni years**



COD.	DESCRIZIONE /DESCRIPTION	IP	CRI	CCT (K)	MOD. LED	VOLTAGE	POWER	LUMEN
3SLXDFBRG4202000DMX	STRIP 420 LED RGB DMX DOT FREE 84W IP65	65	/	RGB	5050	24VDC	84W	850



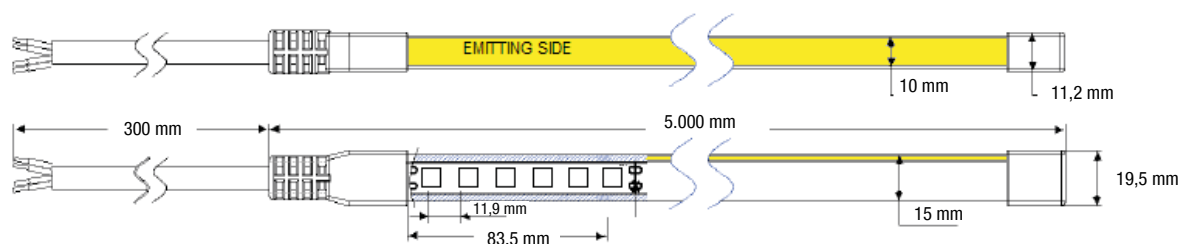


### IP67 DIMENSIONI - IP67 DIMENSION

FRONT CAP



END CAP



### SET ACCESSORI FULL SET ACCESSORY

- n.1 Cavo / Cable
- n.1 Tappo frontale / Front cap
- n.1 Tappo finale / End cap
- n.10 Clip in plastica / Plastic clip
- n.10 Viti / Screw



Tagliare ogni 83,5mm  
 CUT every 83,5mm



**ATTENZIONE / WARNING:** Per la tipologia e la potenza espressa dalla strip, si raccomanda di dotare la stessa di adeguata dissipazione e di incollarla utilizzando il biadesivo termico conduttivo direttamente sulla superficie dissipante. (Due to the heating generated, it is recommended to dissipate it in a properly dissipating aluminum surface).