

# AVA-RAGX

## Fanless AIoT Video Analytics Platform with NVIDIA® Jetson AGX Xavier™ for Railway

### Features

- NVIDIA Jetson AGX Xavier with 32 TOPs AI performance
- 4x M12 GbE with PoE, 1x lockable HDMI output, 4x USB 3.0
- 1x M.2 B-key for LTE/5G; 1x M.2 A/E key 2230 for Wi-Fi
- 2x CAN DB-9 CAN-FD from AGX module, with isolation
- Power with ignition control
- Nominal Voltage: 24VDC, 36VDC, 72VDC and 110VDC (EN50155 compliant)

### Specifications

#### System

##### System on Module

NVIDIA Jetson AGX Xavier, 100x87mm

NVIDIA Jetson AGX Xavier Industrial, 100x87mm

##### Processor

4x dual-core NVIDIA Carmel ARM® v8.2 64-bit CPU, 2.26 GHz  
8MB L2 + 4MB L3

4 x dual-core NVIDIA Carmel ARM® v8.2 64-bit CPU, 2.03 GHz  
8MB L2 + 4MB L3 for Jetson AGX Xavier Industrial

##### GPU

512-core NVIDIA Volta GPU with 64 Tensor Cores, 1.37GHz

512-core NVIDIA Volta GPU with 64 Tensor Cores, 1.21GHz

##### Memory

32 GB eMMC on module for Jetson AGX Xavier

64 GB eMMC on module for Jetson AGX Xavier Industrial

##### Storage

32GB on module

#### Front Interfaces

##### Ethernet

4x GbE connector in M12 female X-coded connectors

Supports PoE IEEE 802.3at by BOM option, PSE total max. power 40W for 4 ports

Isolation 1.5kVdc (2100Vdc) include POE power

##### USB

2x USB 3.0 connector with lock

##### Serial Ports

1x DB-9 RS-232/422/485 from AGX module, TX, RX, CTS, RTX

##### DIO

1x thermal block 4 input/4 output for 24VDC~110VDC, isolation 1.5kVdc

Signals must be separated with a creepage and clearance distance to all other PCB tracks, components and enclosure that can withstand  $\geq 1.5K$  Vdc

Short protection for DO

DI voltage:

Input low(0) at value < 5V

Input high(1) at Value > 12V

Max input current is 4mA

DO max. working voltage is 110V

DO max. current 250mA

##### CAN

2x DB-9 CAN-FD from AGX module, with isolation



#### Rear Interfaces

##### Power Inlet

1x 4-pin male S-coded M12

##### USB

1x USB 2.0 OTG port for image update

2x USB 3.0 for maintenance

##### Display

1x HDMI 2.0 with lock at rear side

##### SD Card

1x MicroSD

##### USIM

1x USIM socket, external accessible, mini-SIM (25x15mm, 2FF)

##### RF interfaces

4+2x RP-SMA connectors

#### Internal Interfaces

##### Storage expansion

1x M.2 M-key (PCIe x4 Gen3)

##### Expansion

1x M.2 B-key 3042/3052 for LTE/5G through USB 3.0

1x M.2 A/E key 2230 for Wi-Fi (PCIe x1)/BT (USB2.0)

##### TPM

TPM 2.0

##### RTC

Real time clock (RTC) with golden cap backup

## Specifications

### • Power

#### Button

Power, Reset, and Recovery buttons on rear

#### Power Input

+24/36/72/110VDC with M12 4-pin S code connector  
16.8V to 137.5V, EN50155 compliant

#### Ignition input

Ignition control

#### Compliance

Compliant to Interruptions of voltage supply according EN50155 SEC. 5.1.1.4  
Class S2 & C1 >= 10ms  
Power Consumption < 160W at 100% GPU loading

#### GND

M6 threaded stainless steel stud for protective grounding on rear

### • Operating System

#### Operating System

Ubuntu 18.04

### • Mechanical

#### Mounting

Wall mount & DIN rail

#### Dimensions

287.7mm x 190mm x 78.3mm (WxDxH with rack)

#### IP

IP20 with reference to IEC 60529 Edition 2.2

#### Weight

4.825 kg

### • Environmental

#### Operating Temperature

-25°C to 70°C, up to +85°C for 10min (EN 50155 OT3 ST1)

#### Storage Temperature

-40°C to 85°C

#### Humidity Operating

10% to 95% relative humidity (non-condensing)

#### Humidity Storage

5% to 95% relative humidity (non-condensing)

#### Environmental

EN50155:2017

Low temperature storage test – EN50155 13.4.6 (Ref. to IEC60068-2-1)

Low temperature start-up test – EN50155 13.4.4 (Ref. to IEC60068-2-1)

Dry heat test – EN50155 13.4.5 (Ref. to IEC60068-2-2)

Cyclic damp heat test – EN50155 13.4.7 (Ref. to IEC60068-2-30)

Shock and Vibration test – EN50155 13.4.11 (Ref. to IEC61373)

Altitude test - EN50125-1:2014 (EN50125-1\_4.2 (Ref. to IEC 60068-2-13)

RoHS 2.0 & REACH

### • Environmental EMC / Safety

#### EMI/EMC

EN 50155:2017 Clause 4.3.6

With reference to EN 50121-1:2017; EN 50121-3-2:2016

EN 61000-4-2:2009; EN 61000-4-3:2006 + A1:2008 + A2:2010

EN 61000-4-4:2012; EN 61000-4-5:2014 + A1:2017

EN 61000-4-6:2014 + AC: 2015

#### Safety

EN 50124-1:2017 Compliance

#### Fire Protection

EN45545-2:2013+A1:2015 (HL 1-3)

### • Miscellaneous

#### LEDs

1x Power On

6x User defined LEDs on front interfaces

Green: U1, U2, U3, U6

Orange: U5

Yellow: U4

#### MTBF

218,125 hrs. @ 40°C according to Telcordia Issue 4, GB, GC

#### Conformal Coating

All PCBs conformal coated both sides – type HumiSeal 1B73 Coating (AR)  
Acrylic

# AVA-RAGX


## Order information

- **AVA-RAGXI/NPOE,CC**  
AI Video Analytics with NVIDIA Jetson AGX Xavier industrial, 32GB LPDDR4, 64GB EMMC supporting 4x M12 ETH, 2x USB 3.1, 4x DI/DO, 2x CAN and 1x COM, conformal coating
- **AVA-RAGXI/POE,CC**  
AI Video Analytics with NVIDIA Jetson AGX Xavier industrial, 32GB LPDDR4, 64GB EMMC supporting 4x M12 ETH w/ POE, 2x USB 3.1, 4x DI/DO, 2x CAN and 1x COM, conformal coating

## Optional accessory

- **Power Adapter Kit**  
24V Power adapter with S-coded cable (ADLINK P/N: 91-95311-000E)
- **Wi-Fi Module**  
EnLi BNA2174\_M21 (29-E2174-9000)
- **5G Module**  
SIMCOM SIM8202G

## Mechanical Drawing

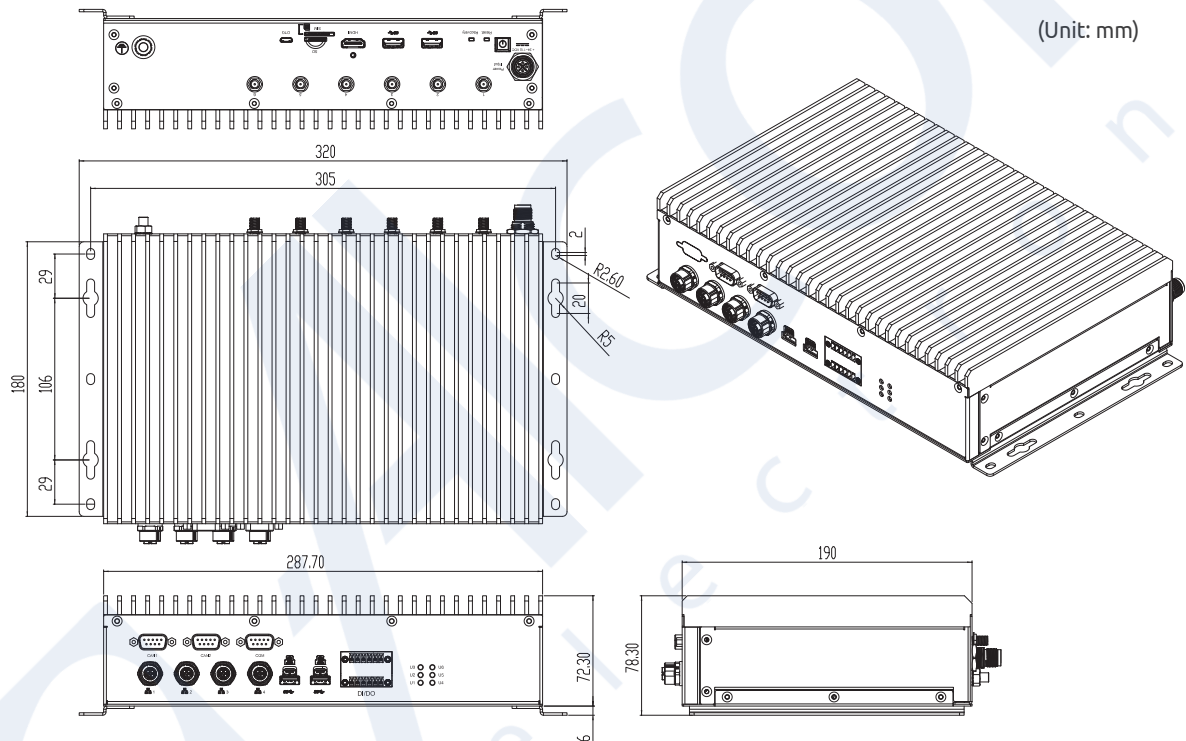

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be  
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl



www.adlinktech.com

All products and company names listed are trademarks or trade names of their respective companies.  
Updated Jun. 20, 2022. ©2022 ADLINK Technology, Inc. All Rights Reserved.  
All specifications are subject to change without further notice.