


EAC


3000



NVIDIA® Jetson AGX Xavier™ Edge AI Computing System

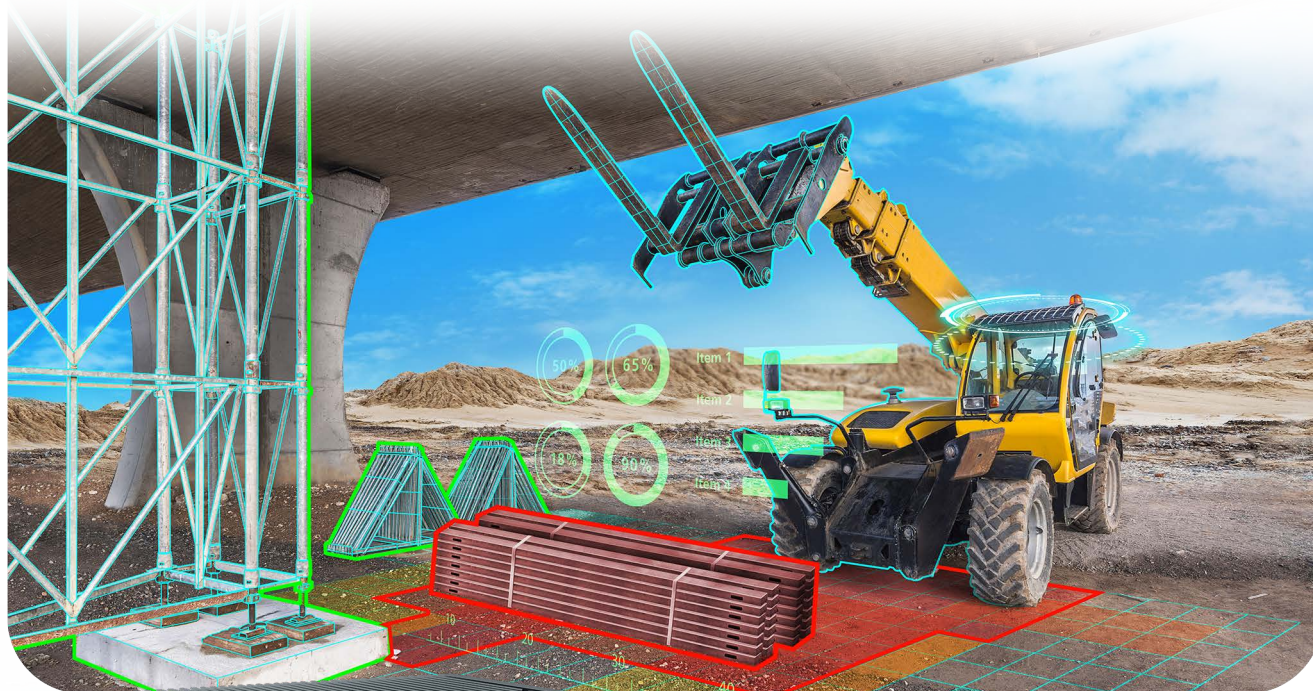

^ In-vehicle Computing

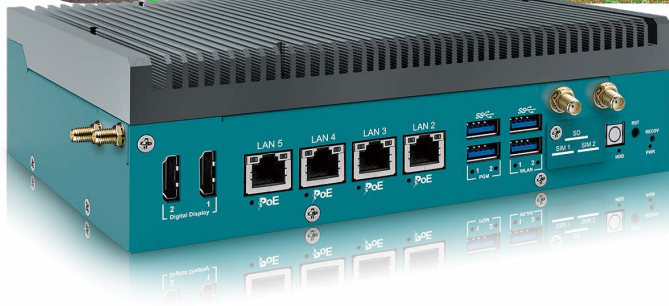

- Compact NVIDIA® Jetson AGX Xavier™ supports workstation-grade up to 32 TOPS AI performance with rich AI tools and workflows
- NVIDIA Volta architecture with 512 NVIDIA® CUDA® cores and 64 Tensor cores
- DC 9V to 50V wide range power input, Ignition Power Control
- 5 GigE LAN with 4 PoE+, 4 USB 3.0, 2 Digital Display
- Supports 8 GMSL 1/GMSL 2 automotive cameras with Fakra-Z connectors
- 2 Isolated CAN Bus support Flexible Data-rate, 2 COM RS-232/422/485
- M.2 supports 5G/4G/LTE/WiFi/BT/GPS

v Medical Image



^ Robotic Control



Vecow

# Specifications

## System

CPU	8-core NVIDIA Carmel ARM® v8.2 64-bit CPU
GPU	NVIDIA Volta architecture with 512 NVIDIA® CUDA® cores and 64 Tensor cores
DL Accelerator	2x NVDLA Engines
Memory	1 LPDDR4x DRAM, Up to 64GB
OS	Linux Ubuntu 18.04 with JetPack

## I/O Interface

USB	4 USB 3.0 Type A
Serial	2 COM RS-232/422/485
CAN Bus	2 Isolated CAN Bus support CAN FD
Micro USB	- 1 Micro USB console debug port - 1 Micro USB OS flash port
Button	- 1 Power Button - 1 Force Recovery Button - 1 Reset Button
LED	Power, HDD, 2 WLAN, 2 User Programmable
SIM	2 SIM Card Socket
Antenna	6 Antenna for WiFi/4G/5G/LTE/GPRS/UMTS

## Expansion

M.2	- 1 M.2 Key B Socket (3042/3052) - 1 M.2 Key E Socket (2230)
-----	---

## Graphics

Interface	2 Digital Display, up to 4Kx2K @30Hz
Video Encode	- HEVC : Up to 4x4K @60, 8x4K @30, 16x1080p @60, 32x1080p @30 - H.264 : Up to 4x4K @60, 8x4K @30, 14x1080p @60, 30x1080p @30
Video Decode	- HEVC : 2x8K @30, 6x4K @60, 12x4K@30, 26x1080p @60, 52x1080p @30 - H.264 : 4x4K @60, 8x4K @30, 16x1080p @60, 32x1080p @30

## Camera

GMSL	8 Fakra-Z connectors for GMSL 1/GMSL 2 automotive cameras
------	---

## Storage

M.2	1 M.2 Key M Socket (2280)
eMMC	1 eMMC 5.1, 32GB
SD	1 Micro SD (External)

## Ethernet

LAN 1	10/100/1000 Base-T Ethernet GigE LAN, RJ45 Connector
-------	--

## PoE

LAN 2 to LAN 5	IEEE 802.3at (25.5W/48V) GigE PoE+ LAN, RJ45 Connector
----------------	--

## Power

Power Input	DC 9V to 50V
Power Interface	3-pin Terminal Block : V+, V-, Frame Ground
Ignition Control	16-mode Software Ignition Control
Remote Switch	3-pin Remote Switch Terminal Block

## Mechanical

Dimensions	212.6mm x 149.0mm x 60.4mm (8.37" x 5.87" x 2.38")
Weight	2.4 kg (5.29 lb)
Mounting	- Wallmount - DIN Rail Mount (Optional)

## Environment

Operating Temp.	<b>30W TDP Mode</b> : -20°C to 70°C (-4°F to 158°F) <b>MAX TDP Mode</b> : -20°C to 55°C (-4°F to 131°F)
Storage Temp.	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @70°C
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-64
EMC	CE, FCC, EN50155, EN50121-3-2

\* All product information may subject to change without prior notice.

\* The rights of all brand names, product names and trademarks belong to their respective owners.  
Copyright © 2022 Vecow Co., Ltd. All rights reserved.

**Vecow** info@vecow.com



# Order Information

Model Name	Platform	RAM	LAN	PoE+	USB 3.0	M.2	Serial	SIM	CAN	GMSL
EAC-3000-R64	Jetson AGX Xavier	64GB	5	4	4	3	2	2	2	8
EAC-3000-R32		32GB								

## Accessories

PWA-160WB-WT	160W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
PWA-180WB	180W, 24V, 90V AC to 264V AC Power Adapter with 3-pin Terminal Block
PWA-280WB-WT	280W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
VESA Mount	VESA Mounting Kit
DIN-RAIL	DIN Rail and VESA Mounting Kit
GMSL Camera Kit	GMSL Camera with Fakra-Z connector
M.2 Storage Module	M.2 Key M/Key B PCIe Storage Module
5G Module	5G Module with Antenna
4G Module	4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna

# Dimensions & Drawing

Unit : mm (inch)

