

# EvaluatIR-A

- Autonomous CO<sub>2</sub> evaluation
- Real time recordings of CO<sub>2</sub> levels
- Measures full suite of other environmental parameters



## About the EvaluatIR®-A

The EvaluatIR-A evaluation kit provides users with a convenient way to evaluate the GSS CozIR®-A CO<sub>2</sub> sensor in an easy-to-use battery-powered package. The ExplorIR®-A sensor uses patented NDIR solid-state LED optical technology to deliver consistent and accurate CO<sub>2</sub> measurements.


The EvaluatIR-A evaluation kit measures and records CO<sub>2</sub> over a 0-1% range as well as relative humidity, temperature, and barometric pressure. The evaluation kit connects to a PC via a USB port and includes software that allows the user to download the recorded data, in a format suitable for import into Excel or other data analysis tools. All recorded data is time-stamped allowing users to easily analyse CO<sub>2</sub> sensor behaviour.

The evaluation kit will operate for up to 12 months on 2 x AA batteries (not included).

## In the Kit

- EvaluatIR-A Module
- USB Cable
- Evaluation Software
- Protective Carry Case

## Software Interface

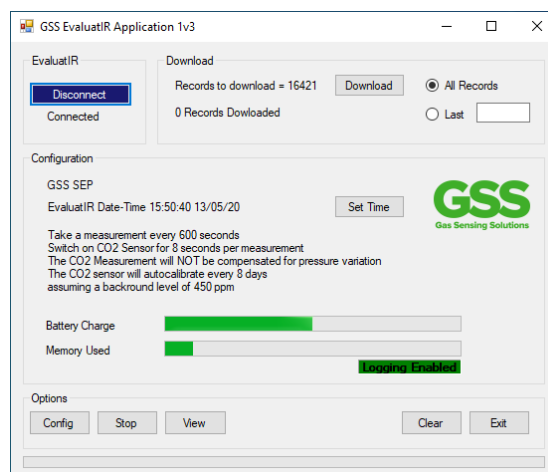

# EvaluatIR-A

**GSS**  
Gas Sensing Solutions

## Ordering Information

EVALUATIR-A - X

x	Measurement Range
1	0 - 1%

<https://www.gassensing.co.uk/product/evaluatir-a/>



## CO<sub>2</sub> Sensor Specifications

Measurement Ranges	0-1%
Accuracy (typ.)	0-1% ±(30ppm, +3% of reading)
Response Time	2 Minutes (Diffusion Limited)
Readings per Second	2
Sample Method	Solid-state LED NDIR Diffusion

## Electrical and Mechanical Specifications

Measurement Output	USB mini to PC Application
Power	2 x AA Batteries
Dimensions and Weight	145mm x 95mm x 35mm, 225g

## Operating Conditions

Operating Conditions – Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-40°C to +70°C
Pressure Dependence	0.15% of reading per mbar
Environmental Compliance	RoHS and REACH

## Humidity and Sensor Specification

Humidity Measurement Range	0-95%
RH Accuracy @ +25°C	±3%
Repeatability @ +25°C	±1%

## Temperature Sensor Specification

Temperature Measurement Range	0- 50°C
Accuracy 0- 50°C	±0.5°C
Repeatability @+25°C	±0.1°C

## Pressure Sensor Specification

Pressure Measurement Range	50 – 110kPa
Accuracy 0- 50°C	±0.4kPa
Repeatability @+25°C	-±0.05kPa