













SANTOKA 32.0 SG

ARM Cortex-A9 Flush Mount




coming soon
subject to change



TECHNICAL SPECIFICATION

SANTOKA 32.0 SG

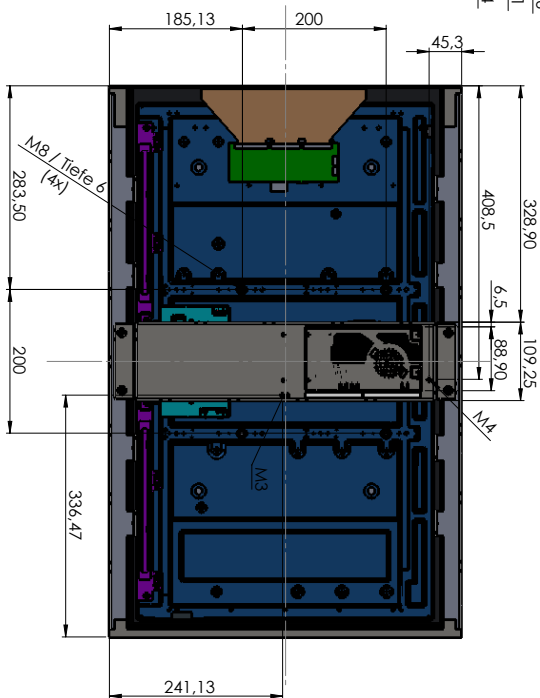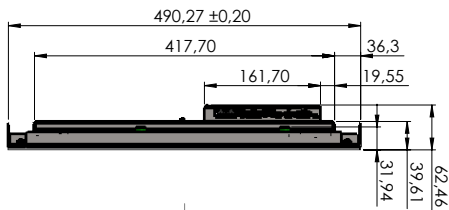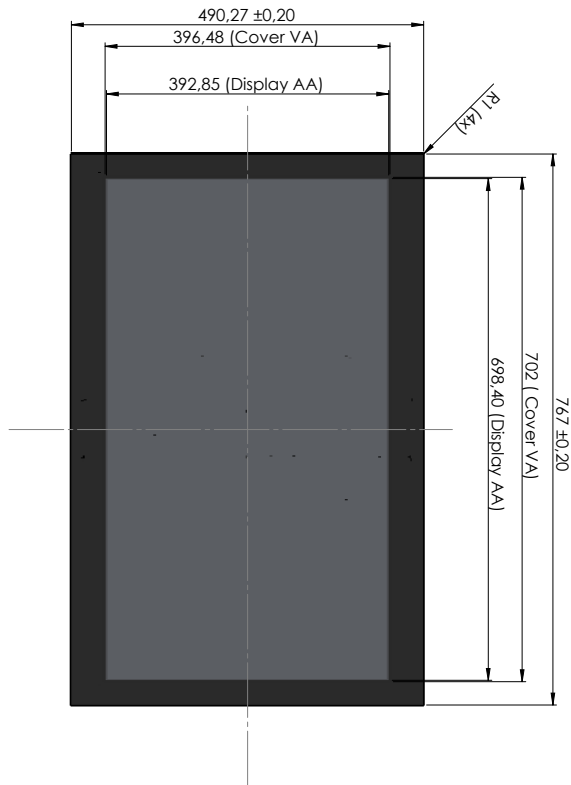

CPU	x2	x4
CPU Type	i.MX6Dual	i.MX6Quad
Core Class	ARM Cortex - A9	
Core Clock	1 GHz	
Features	NEON for SIMD media acceleration and VFP operations; Multi-format HD 1080p video decoder and HD 720p video encoder hardware engine; L1 cache, 32 KB for instruction, 32 KB for data 1 MB L2 cache	
HW Accelerators	OpenGL ES 2.0, OpenVG 1.1	
RTC	Accuracy: +/- 30 ppm at 25°C	
Memory		
eMMC Flash	4 GB MLC eMMC	
RAM Standard	1 GB 64 bit DDR3L	
SD Card Slot	4 bit MMC/SDIO/SD/SDHC	
Operating Systems		
Supported OS	Linux Yocto, Android	
Communication Interfaces		
Network	2x 10/100 Mbit/s Ethernet (RJ-45)	
USB 2.0	2x 480 Mbit/s Host (Type A) 1x 480 Mbit/s OTG (Type Micro-AB)	
CAN Fieldbus / RS-485	1x CAN (ISO/DIS 11898) + 1x RS-485 galvanic isolated	
RS-232	2x RS-232 (RX/TX/CTS/RTS)	
Synchronous Serial Interfaces	SPI up to 12 chip selects; I ² C; Matrix keypad up to 8 x 8	
Wireless Communication		
Wireless	WLAN 802.11 b/g/n; Bluetooth 4.0 LE For available mPCIe modules see page 129	
Video		
Video Output	Full HD HDMI	
Audio		
Speaker Output	1x speaker (connector), 1.5W RMS (8Ω)	
Audio Internal	1x speaker 0.3 W RMS (8Ω)	
Display and Touch		
Size	32.0 inch/812.8 mm	
Resolution	1920 x 1080 pixel	
Brightness	Typ. 400 cd/m ²	
Backlight Lifetime	Min. 50 000 h	
Viewing Angle	89°, 89°, 89°, 89° (UDRL)	
Color	24 bit [16.7 Mio. colors]	
Touch	projected capacitive multi touch	
Housing		
Front	4.0 mm toughened glass, RAL 9005	
Frame	Aluminum, colorless anodized	
Rear	1.4016 stainless steel, foam seal	
Ingress Protection	Front IP 66/Rear IP20	
Device Dimensions		
W x H x D	767 x 490.27 x 62.49 mm	
Weight	tbd.	
Power Supply		
Supply Voltage	Nom. 13 to 32 V DC/24 V Backlight	
Consumption	Typ. tbd.; max. 40.6 W	
Typical Environmental Conditions		
Storage Temp.	-20 to +70 °C	
Operating Temp.	0 to +50 °C	
Humidity	5 to 90 % RH	

"THIS PRODUCT CAN BE MODIFIED BY ALTERNATIVE ASSEMBLY. PLEASE CONTACT US FOR AVAILABLE OPTIONS."