

2016 STRIP LED 240 LED/m 19,2W/m 5m PWM DIM TO WARM

SPECIFICATIONS:

LED: 240 LED/m
Strip dimension: 10 x 1,5 x 5.000 mm
Working voltage: 24VDC
IP: 20
Power: 19,2W/m
Luminous flux: 1400 lm/m
Module dimension: 50 mm
LED distance: 8,3 mm
Working temp.: -20 +45°C
Stocking temp.: 0 +60°C

CRI **90**


LIFETIME EXPECTANCY
 (L80B10) 40000 h @ T55°C

Warranty **3** years



COD.	DESCRIPTION	IP	CRI	CCT (K)	MOD. LED	VOLTAGE	POWER	LUMEN
3SLEFA2WD1222E10	STRIP 1200 LED DTW 96W IP20	20	90	1800-3200	2016	24VDC	96W	7000

Accessories pag. 53

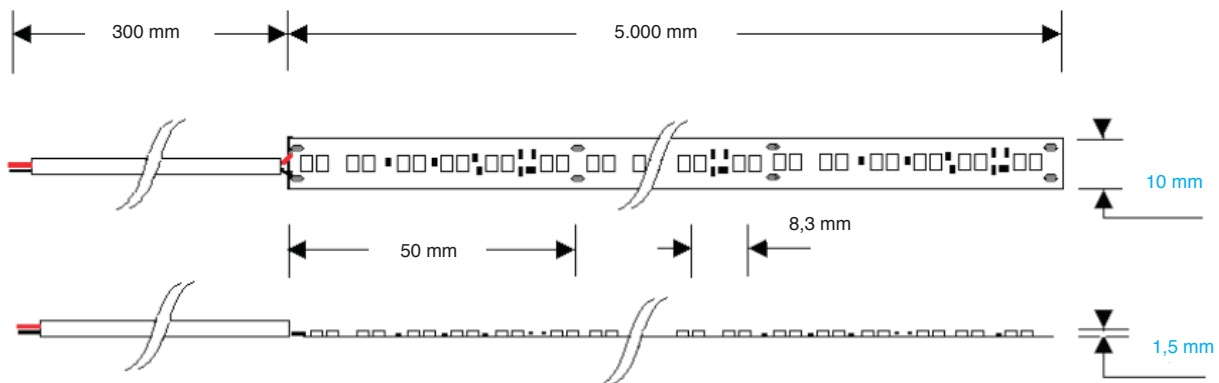


Waterproof

IP AVAILABLE: C = IP54 / G = IP65

The strip led is available in different IP: take a look at the technical sheet to choose the right IP before the order. **To know the product's code, replace the blue letter with the letter of the IP model chosen.**

IP measures and design - table on page 57



WARNING: Due to the heating generated, it is recommended to dissipate it in a properly dissipating aluminum surface.