


# MPO-550MS Series

## Compact, Open Frame 550W, Medical/Industrial AC/DC Power Supplies

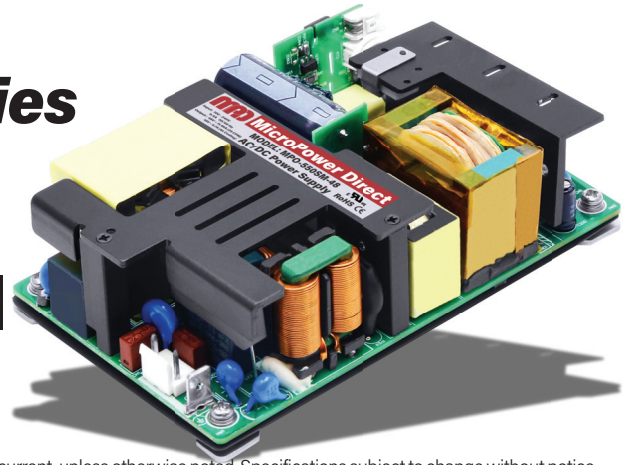

### Key Features:

- 550W Output Power
- Compact 5" x 3" Size
- UL 60601 Approval
- UL 62368 Approval
- Insulation 2 x MOPP
- Suitable For BF Apps
- Meets EN 55032 B
- Meets EN 60335
- Meets EN 61558
- <0.1mA Leakage Current
- Active PFC



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input		Min.	Typ.	Max.	Units
Parameter	Conditions				
Input Voltage Range		90		264	VAC
		127		370	VDC
Input Frequency		47		63	Hz
Input Current	115 VAC			6.5	A
	230 VAC			3.0	A
Leakage Current	264 VAC	Contact <0.1 mA; Earth <0.5 mA			
Inrush Current, Cold Start	115 VAC		50		A Pk
	230 VAC		80		A Pk
Power Factor	115 VAC	0.98			---
	230 VAC	0.95			---

Output		Min.	Typ.	Max.	Units
Parameter	Conditions				
Output Voltage Accuracy, 0-100% Load	36V/48V/54V Output		±1.0		%
	All Other Models		±2.0		%
Line Regulation	At Rated Load		±0.5		%
Load Regulation	0 - 100% Load		±1.0		%
Ripple & Noise (20 MHz)	See Note 2			200	mV
Hold-Up Time, 230 VAC	115 VAC Input	10			mSec
	230 VAC Input	10			mSec
Temperature Coefficient			±0.03		%/°C
Standby Power Consumption				0.50	W
Fan Power				12V @ 0.50A	
Over Current Protection	Self Recovery	105			%Iout
Over Temperature Protection	See Note 3				
Short Circuit Protection, See Note 4	Continuous (Autorecovery)				

General		Min.	Typ.	Max.	Units
Parameter	Conditions				
Isolation Voltage, See Note 5	Input to Output	4,000			
	Input to Ground	2,000			VAC
	Output to Ground	1,500			VAC
Insulation Resistance	See Note 6	100			MΩ
Isolation Level	Input to Output			2 x MOPP	
	Input to Ground			1 x MOPP	
	Output to Ground			1 x MOPP	
Switching Frequency			95		kHz

Environmental		Min.	Typ.	Max.	Units
Parameter	Conditions				
Operating Temperature Range	Ambient	-40	+25	+70	°C
Storage Temperature Range		-40		+85	°C
Cooling	Free Air Convection (See Derating Curves)				
Humidity, RH, Non-condensing	Operating	20		90	%
	Storage	10		95	%

**Physical**  
Size and Weight See Mechanical Drawing (Page 5)

Reliability Specifications		Min.	Typ.	Max.	Units
Parameter	Conditions				
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	200			kHours
Safety Standards	UL/cUL 60601-1 recognition (UL certificate)				
	UL/cUL 62368-1 recognition (UL certificate)				
	EN60335				
Safety Class	Class I				

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

[www.micropowerdirect.com](http://www.micropowerdirect.com)

	Model Number	Cooling Method	Output				Over Voltage Protection (VDC) See Note 7	Output Capacitive Load ( $\mu$ F Max)	Efficiency @ 230 VAC (% Typ)	
			Voltage (VDC)	Current (A)		Power (W)				Adj Range (VDC)
				Rated	% Min.					
UL	MPO-550MS-12	Air Cooling	12.0	26.70	0.00	320.4	11.40 - 12.60	15.6	6,000	91.0
		25 CFM		41.60		499.2				
UL	MPO-550MS-15	Air Cooling	15.0	21.30	0.00	319.5	14.25 - 15.75	19.5	6,000	92.0
		25 CFM		33.30		499.5				
	MPO-550MS-18	Air Cooling	18.0	17.80	0.00	320.4	17.10 - 19.90	23.4	6,000	92.5
		25 CFM		27.80		500.4				
UL	MPO-550MS-24	Air Cooling	24.0	13.40	0.00	321.6	22.80 - 25.20	31.2	6,000	93.0
		25 CFM		22.90		549.6				
UL	MPO-550MS-27	Air Cooling	27.0	11.90	0.00	321.3	25.65 - 28.35	35.1	4,000	93.5
		25 CFM		20.40		550.8				
UL	MPO-550MS-36	Air Cooling	36.0	8.90	0.00	320.4	34.20 - 37.80	46.8	3,000	94.0
		25 CFM		15.30		550.8				
UL	MPO-550MS-48	Air Cooling	48.0	6.70	0.00	321.6	45.60 - 50.40	60.0	2,000	94.0
		25 CFM		11.46		550.0				
	MPO-550MS-54	Air Cooling	54.0	5.75	0.00	310.5	51.30 - 56.70	63.0	1,500	94.0
		25 CFM		10.20		550.8				

Notes:

- Units that are marked with the "UL" in the model selection table above are approved to UL 62368 and UL 60601. Other models meet these specifications.
- Output ripple is measured at 20 MHz bandwidth using a 0.1  $\mu$ F ceramic capacitor, and a 47  $\mu$ F electrolytic capacitor connected in parallel as close to the power supply terminals as possible.
- After an overtemperature fault, the unit will recover automatically when the temperature drops.
- Output short circuit protection is provided by a "hiccup mode" circuit. The unit recovers <5 seconds after the fault condition is removed.
- Input-output, input-ground and output-ground isolation are tested for 60 seconds with a leakage current of <5 mA.
- Insulation resistance is tested at an ambient temperature of 25°C  $\pm$  5°C, at a relative humidity of <95%RH (no condensation) with a test voltage of 500 VDC. It is given for input to output, input to ground and output to ground.
- After an overvoltage fault, the unit power must be recycled for the unit to recover.
- All units include an on-board slow blow fuse.
- These units use acrylic conformal coating on the PC board to help protect solder joints against issues caused by Ion migration, dust, moisture, etc.

EMC Characteristics

Parameter	Conditions	Criteria	Level
Conducted Emissions	EN 55032		Class B
Radiated Emissions	EN 55032		Class B (Category I)
			Class A (Category II)
Harmonic Current	EN 61000-3-2		Class D
ESD	EN 61000-4-2	A	$\pm$ 15 kV Air
			$\pm$ 8 kV Contact
RS	EN 61000-4-3	A	10V/m
EFT	EN 61000-4-4	A	$\pm$ 2 kV
Surge	EN 61000-4-5	A	$\pm$ 2 kV Line to Line
			$\pm$ 4 kV Line to Gnd
CS	EN 61000-4-6	A	10V rms
Dips	EN 61000-4-11	B	0%, 70%

Notes:

- All EMC tests are conducted on a metal plate measuring 360 x 360 mm with a thickness of 1mm. Contact the factory for more information.

Operating Signals

Power On and Power Good signals are provided to help monitor power supply operation. A couple of notes are:

- The PG signal goes high with 10 mS to 500 mS delay after the power supply start up.
- The PG signal goes low at least 1 mS before the output voltage reaches 90% of nominal value.


See page 5 for connection information.

Signal	Conditions		Min.	Typ.	Max.	Units
PS ON Input Signal	Power ON	PS_ON High	2.0		5.0	VDC
	Power OFF	PS_ON Low	0		0.5	
PG Signal		Power On, See Note 1	10		500	mS
		Power Off/Power Fail, See Note 2	1			
		High Level	High	2.0		VDC
		Low Level	Low	0		


Remote Sensing

The remote sense connection may be used to compensate for a voltage drop on the output cable. If used, the connection is made as shown in the figure at right. Some precautions include:


- The +S and -S terminals cannot be reversed or shorted. The power supply would be damaged if this occurs.
- The remote compensation connection must be made with twisted pair wires (as shown in the diagram at left). Otherwise, damage to the unit may occur.

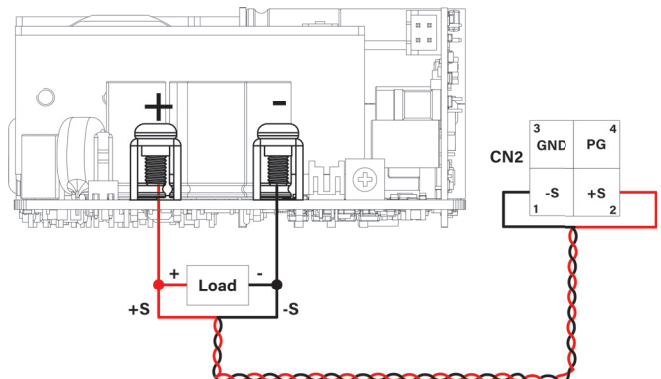


**Temperature Derating, All Models, 25 CFM**

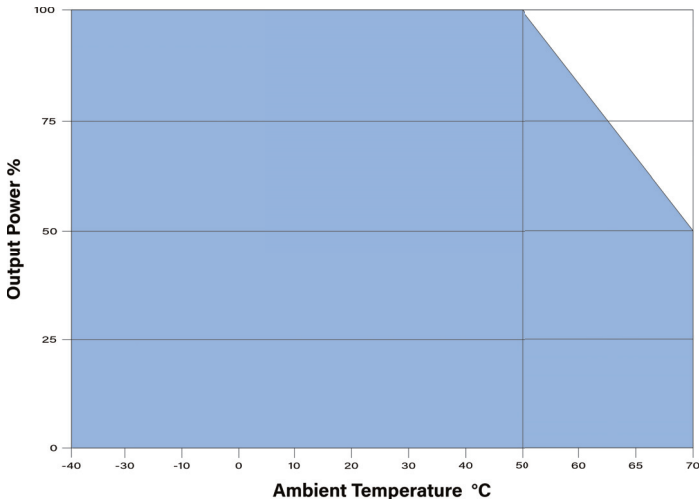


**Temp Derating, 12/15/18 VOUT, 230 VAC, Convection**

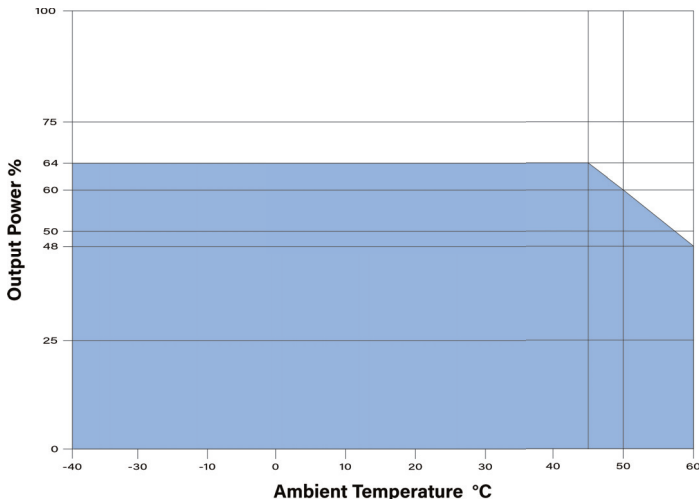


**Temp Derating, 12/15 /18 VOUT, 115 VAC, Convection**

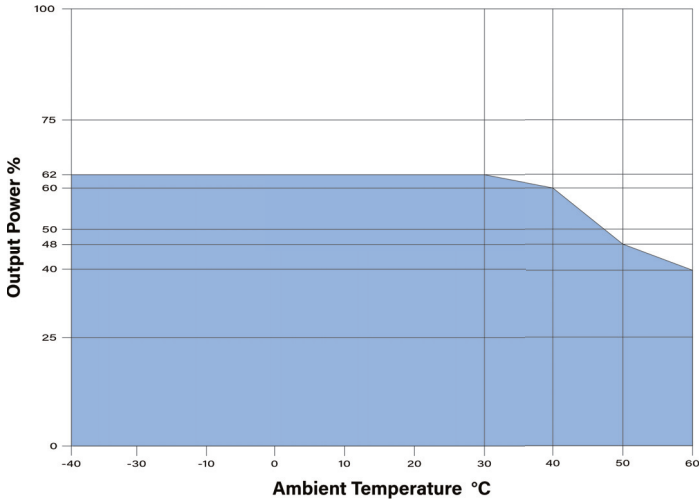


**Temp Derating, Other Models, 230 VAC, Convection**

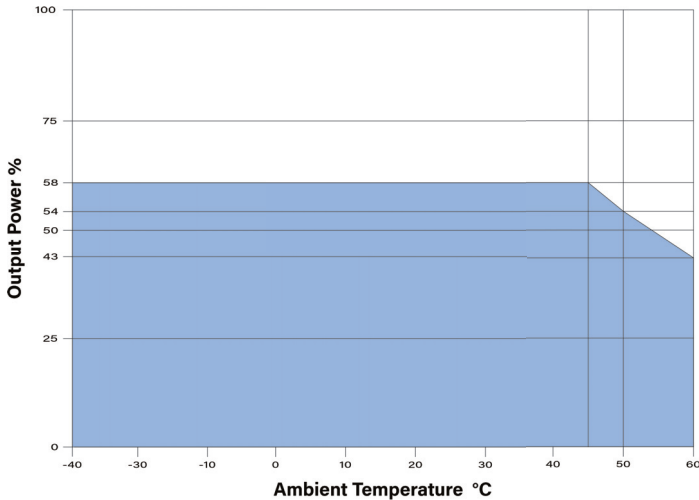


**Temp Derating, Other Models, 115 VAC, Convection**

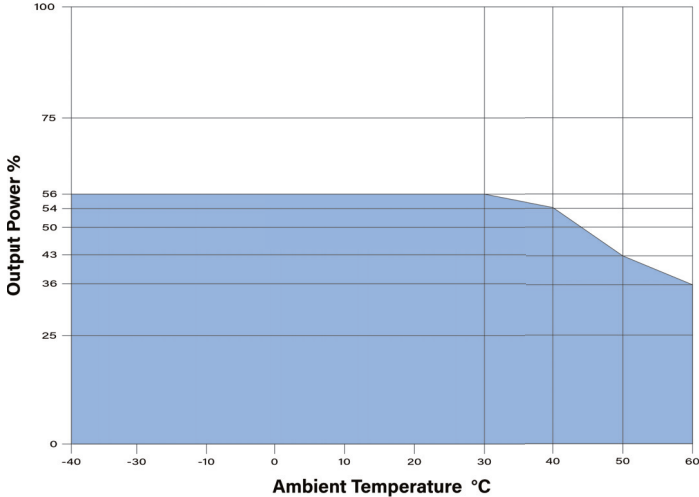


**Input Voltage Derating**

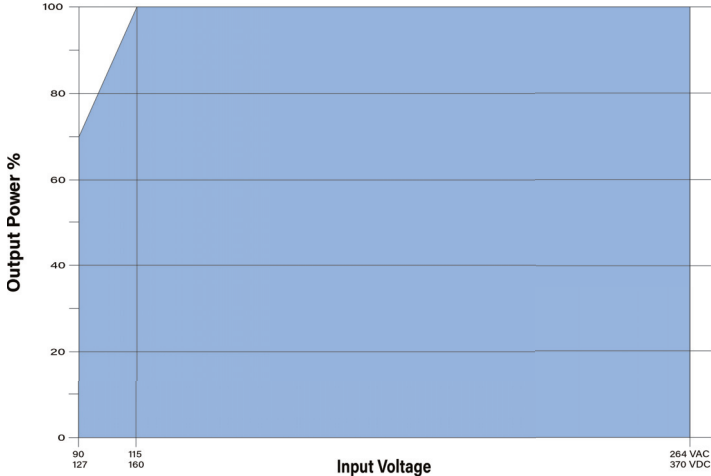


Efficiency vs Input Voltage: 12 Vout

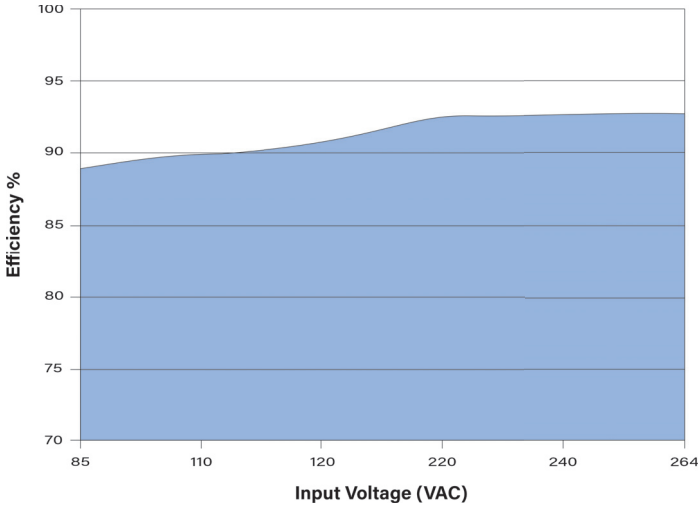


Efficiency vs Output Load: 12 Vout

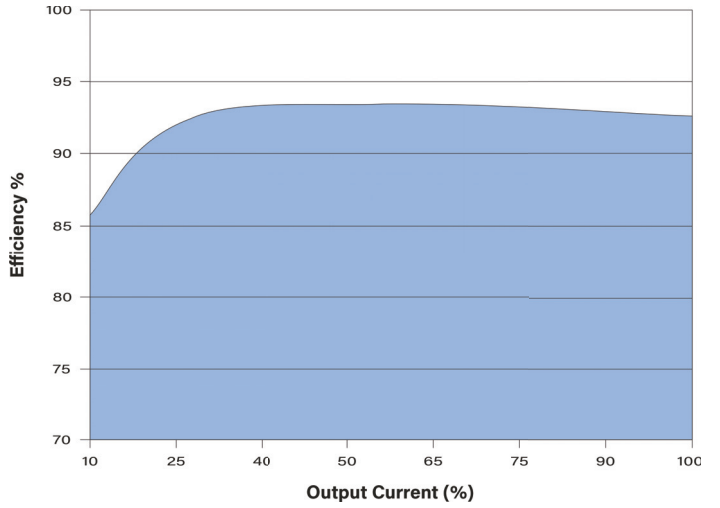


Efficiency vs Input Voltage: 24 Vout

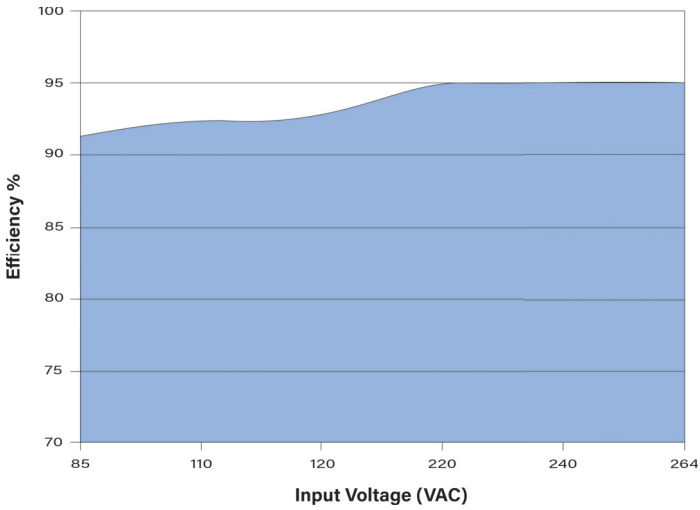


Efficiency vs Output Load: 24 Vout

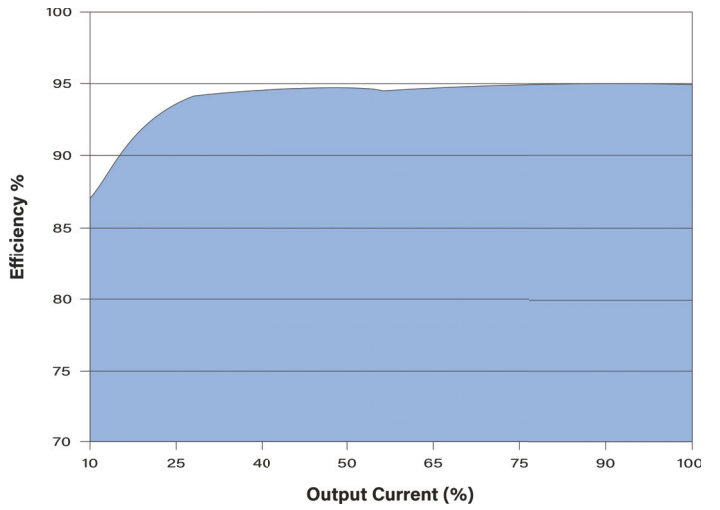




Efficiency vs Input Voltage: 48 Vout

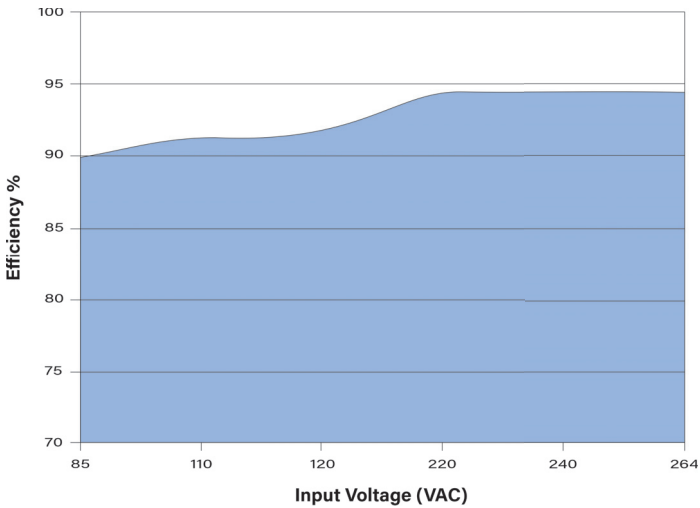

Efficiency vs Output Load: 48 Vout

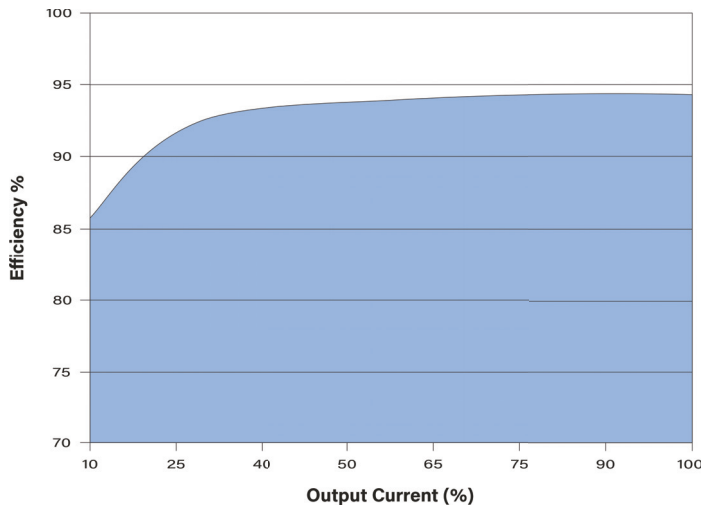

**Mechanical Dimensions**

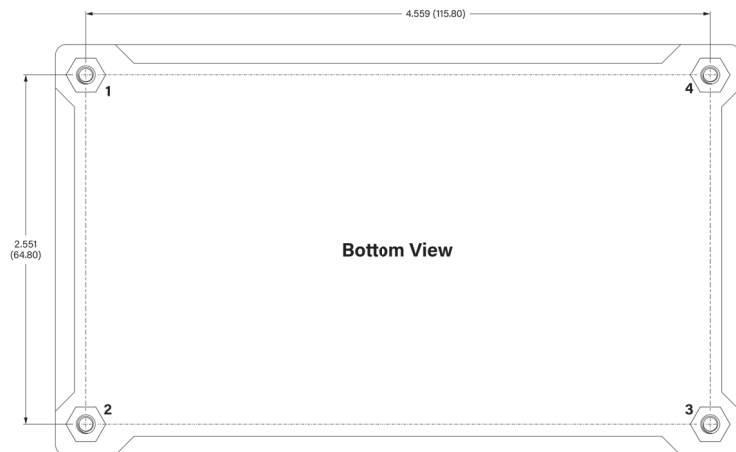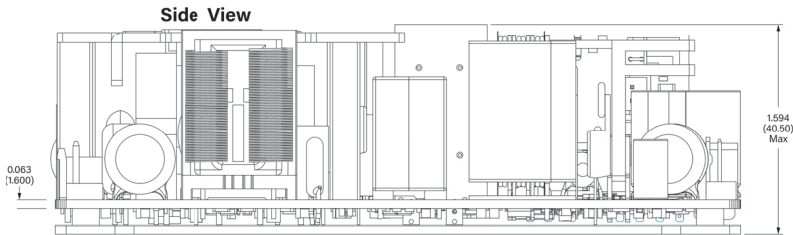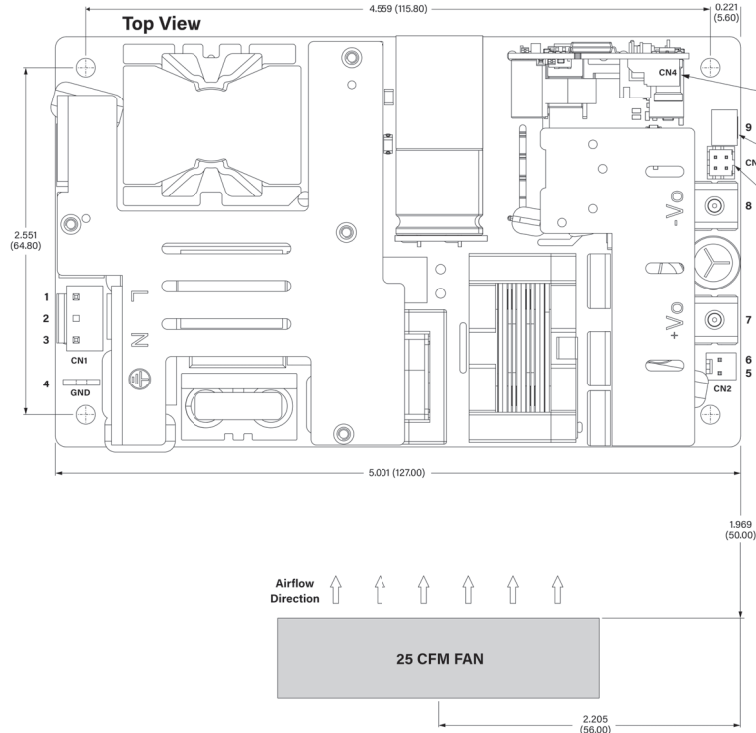

**Notes:**

- All dimensions are typical in inches (mm)
- General Tolerance =  $\pm 0.039$  ( $\pm 1.0$ )
- Weight (Typ) = 17.28 Oz (490g)
- The Fan Power output (CN2) should not be used to power other devices
- The unit should be connected to PE before operating. This connection can be made at any position (1 to 4) as shown on the mechanical diagram.
- A minimum of 10 mm should be maintained between the power supply and any other components
- The unit uses double pole, neutral fusing. Disconnect the mains before servicing.

**Power Connections**

**Input Connector (CN1):**

- Mating Terminal: JST VHR
- Contact: JST SVH-21T-P1.1


Pin	Function
1	AC-Line
2	No Connection
3	AC-Neutral

**Ground Connection:** Ferrule Wire


**Output Connection:**

- Screw Terminals (7, 8) M4
- Max Tightening Torque 1.2N·m
- Adjust. Resistor (9)


Pin	Function
7	+V <sub>OUT</sub>
8	-V <sub>OUT</sub>
9	VADJ

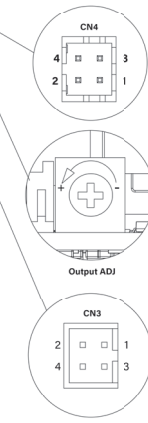

**Connection to Customer System**



**End View**

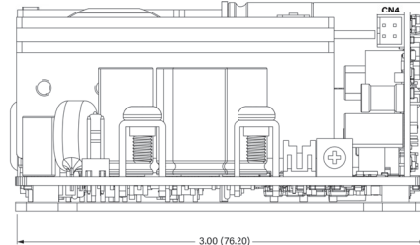

**Signal Connections**

**CN2: Fan Connector**

- Mating Terminal: TKP 2502
- Contact: TKP 8811

Pin	Function
5	+Fan
6	-Fan

**Remote Sense (CN3):**

- Mating Terminal: JST PHD-2\*2Y
- Contact: JST PHD-TE

Pin	Function
1	RS -
2	RS +

See Page 2 for more Info

**Power Good (CN3):**

Pin	Function
3	GND
4	Power Good

See Page 2 for more Info

**Standby Output (CN4):**

- Mating Terminal: JST PHD-2\*2Y
- Contact: JST PHD-TE

Pin	Function
1	+ 5V
2	GND

**Power On Signal (CN4):**

Pin	Function
3	PS-ON
4	GND

See Page 2 for more Info

**Unit Mounting Screws:**


Position	Screw	L (Recommended)	Max Torque
1, 2, 3, 4	M3	2.5 mm	0.4N·m

For class I systems, points 1, 2 & 4 must be connected to earth grd.

**ALSO AVAILABLE:**

**www.micropowerdirect.com**

### MPO-120MS

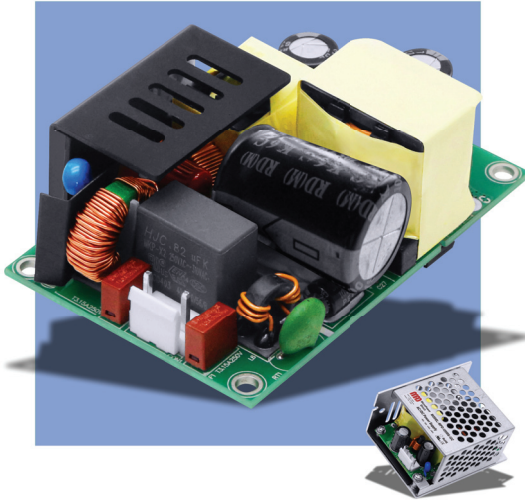

The **MPO-120MS** is a compact, 120W switching power supply. Features include reinforced insulation, UL 60601 & UL 62368 approvals, 4,00 VAC I/O isolation, active PFC, and tight line/load regulation. It's small size, high performance levels and low cost make it an excellent choice for a wide range of industrial, medical, commercial or office applications.

**Key Features Include:**

- 120W Output Power
- UL 60601 Approval
- Insulation 2 x MOPP
- Meets EN 55032 B
- Meets EN 61558
- Active PFC
- Miniature 3" x 2" Size
- UL 62368 Approval
- Suitable For BF Apps
- Meets EN 60335
- <0.1mA Leakage Current
- Available With Case

### MPO-350MS

The **MPO-350MS** is a very compact 350W switching power supply. Featuring UL 60601 & UL 62368 approvals, active PFC, reinforced insulation, tight line/load regulation, 4,00 VAC I/O isolation and active PFC. It's combination of industry approvals, high power capability, robust performance envelope, and configuration flexibility make it an excellent choice for a wide range of industrial, medical or commercial applications.

**Key Features Include:**

- 350W Output Power
- UL 60601 Approval
- Insulation 2 x MOPP
- Meets EN 55032 B
- Meets EN 61558
- Active PFC
- Compact 5" x 3" Size
- UL 62368 Approval
- Suitable For BF Apps
- Meets EN 60335
- <0.1mA Leakage Current
- Available With Case




### MPO-450MS

The **MPO-450MS** is a high density, UL 60601 & UL 62368 approved 450W switching power supply. Fabricated on a 5" x 3" board, it features reinforced insulation, tight line/load regulation, 4,00 VAC I/O isolation and active PFC. It's combination of high power, industry approvals, robust performance features and configuration flexibility make it an excellent choice for a wide range of industrial, medical or commercial applications.

**Key Features Include:**

- 450W Output Power
- UL 60601 Approval
- Insulation 2 x MOPP
- Meets EN 55032 B
- Meets EN 61558
- Active PFC
- Compact 5" x 3" Size
- UL 62368 Approval
- Suitable For BF Apps
- Meets EN 60335
- <0.1mA Leakage Current
- Available With Case & Fan

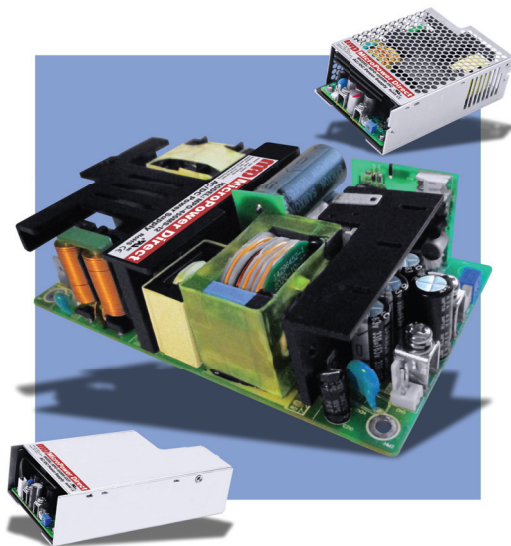

**MicroPower Direct**

**We Power Your Success - For Less!**

292 Page Street Ste D Stoughton, MA 02072 ■ TEL: (781) 344-8226 ■ FAX: (781) 344-8481 ■ E-Mail: sales@micropowerdirect.com