


# SMT Power Inductors

High Current Molded Power Inductor - PA5404 & PM5404 Series

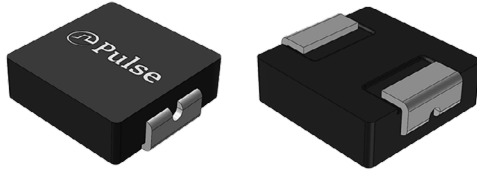

- Ⓢ **Height:** 5.0mm Max
- Ⓢ **Footprint:** 7.6mm x 6.9mm Max
- Ⓢ **Current Rating:** up to 32A
- Ⓢ **Inductance Range:** 0.1 to 68uH
- Ⓢ High current, low DCR, and high efficiency
- Ⓢ Shielded construction and compact design
- Ⓢ Minimized acoustic noise and minimized leakage flux noise
- Ⓢ 200 Vdc Isolation Between Terminal and Core
- Ⓢ Available in Commercial (PA) and Automotive (PM) grades


## Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

| Commercial <sup>6,7</sup> | Automotive <sup>6,7</sup> | Inductance <sup>5</sup><br>100KHz, 1.0V<br><br>uH±20% | Rated <sup>2</sup><br>Current | DC<br>Resistance |      | Saturation <sup>2</sup><br>Current | SRF |
|---------------------------|---------------------------|---|-------------------------------|------------------|------|------------------------------------|-----|
|                           |                           |   | TYP.                          | TYP.             | MAX. | TYP.                               | Typ |
|                           |                           |   | A                             | mΩ               | mΩ   | A                                  | MHz |
| PA5404.101NLT             | PM5404.101NLT             | 0.10*   | 32                            | 0.65             | 0.78 | 65                                 | 350 |
| PA5404.111NLT             | PM5404.111NLT             | 0.11*   | 32                            | 0.65             | 0.78 | 65                                 | 350 |
| PA5404.151NLT             | PM5404.151NLT             | 0.15*   | 30                            | 1.3              | 1.7  | 50                                 | 210 |
| PA5404.221NLT             | PM5404.221NLT             | 0.22  | 25                            | 1.6              | 1.9  | 35                                 | 150 |
| PA5404.331NLT             | PM5404.331NLT             | 0.33  | 25                            | 2.5              | 3    | 32                                 | 100 |
| PA5404.401NLT             | PM5404.401NLT             | 0.4   | 23                            | 3.1              | 3.7  | 31                                 | 100 |
| PA5404.471NLT             | PM5404.471NLT             | 0.47  | 22                            | 3.5              | 3.9  | 30                                 | 95  |
| PA5404.561NLT             | PM5404.561NLT             | 0.56  | 20                            | 3.6              | 4.2  | 27                                 | 80  |
| PA5404.601NLT             | PM5404.601NLT             | 0.6   | 19                            | 3.8              | 4.3  | 25                                 | 80  |
| PA5404.681NLT             | PM5404.681NLT             | 0.68  | 18                            | 4                | 4.5  | 24                                 | 75  |
| PA5404.821NLT             | PM5404.821NLT             | 0.82  | 16.5                          | 4.6              | 4.9  | 22                                 | 70  |
| PA5404.102NLT             | PM5404.102NLT             | 1.0   | 15                            | 6.1              | 6.5  | 20                                 | 50  |
| PA5404.122NLT             | PM5404.122NLT             | 1.2   | 14                            | 6.7              | 7.5  | 18                                 | 45  |
| PA5404.152NLT             | PM5404.152NLT             | 1.5   | 12                            | 8.6              | 9    | 16.5                               | 43  |
| PA5404.182NLT             | PM5404.182NLT             | 1.8   | 12                            | 9.5              | 11   | 15                                 | 38  |
| PA5404.222NLT             | PM5404.222NLT             | 2.2   | 10                            | 11.2             | 12   | 14                                 | 30  |
| PA5404.332NLT             | PM5404.332NLT             | 3.3   | 8                             | 19               | 20.9 | 12                                 | 26  |
| PA5404.472NLT             | PM5404.472NLT             | 4.7   | 6.5                           | 28               | 30.8 | 10                                 | 22  |
| PA5404.492NLT             | PM5404.492NLT             | 4.9   | 6.3                           | 32               | 38   | 9.5                                | 21  |
| PA5404.562NLT             | PM5404.562NLT             | 5.6   | 6                             | 43.5             | 49   | 9                                  | 20  |

### Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

| Commercial <sup>6,7</sup> | Automotive <sup>6,7</sup> | Inductance <sup>5</sup><br>100KHz, 1.0V<br><br>uH±20% | Rated <sup>3</sup><br>Current | DC<br>Resistance |      | Saturation <sup>2</sup><br>Current | SRF  |
|---------------------------|---------------------------|---|-------------------------------|------------------|------|------------------------------------|------|
|                           |                           |   | TYP.                          | TYP.             | MAX. | TYP.                               | TYP. |
|                           |                           |   | A                             | mΩ               | mΩ   | A                                  | MHz  |
| <b>PA5404.822NLT</b>      | PM5404.822NLT             | 8.2   | 5                             | 56               | 63   | 8                                  | 16   |
| <b>PA5404.103NLT</b>      | PM5404.103NLT             | 10.0  | 3.8                           | 60               | 69   | 7.5                                | 15   |
| <b>PA5404.123NLT</b>      | PA5404.123NLT             | 12  | 3.5                           | 68               | 80   | 6.7                                | 13   |
| <b>PA5404.153NLT</b>      | PM5404.153NLT             | 15  | 3.5                           | 81               | 92   | 6                                  | 12   |
| <b>PA5404.223NLT</b>      | PM5404.223NLT             | 22  | 2.5                           | 140              | 170  | 5.5                                | 9    |
| <b>PA5404.333NLT</b>      | PM5404.333NLT             | 33  | 2                             | 173              | 200  | 3.5                                | 8    |
| <b>PA5404.423NLT</b>      | PM5404.423NLT             | 42  | 2                             | 212              | 245  | 2.8                                | 8    |
| <b>PA5404.473NLT</b>      | PM5404.473NLT             | 47  | 1.9                           | 290              | 330  | 2.7                                | 8    |
| <b>PA5404.563NLT</b>      | PM5404.563NLT             | 56  | 1.6                           | 342              | 396  | 2.1                                | 7    |
| <b>PA5404.683NLT</b>      | PM5404.683NLT             | 68  | 1.2                           | 386              | 445  | 2                                  | 6    |

#### Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Please note that the inductance tolerance of all parts are ±20%, except those indicated by an \* which are +/- 30%.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution **and lead times may be longer**. Please contact Pulse for availability.
- The PM prefix parts are AEC-Q200 qualified and has full automotive IATF16949 certification. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) 1.33 and therefore may not strictly conform to PPAP.
- Special characteristics 


# SMT Power Inductors

High Current Molded Power Inductor - PA5404 & PM5404 Series



## Mechanical


### PA5404/PM5404

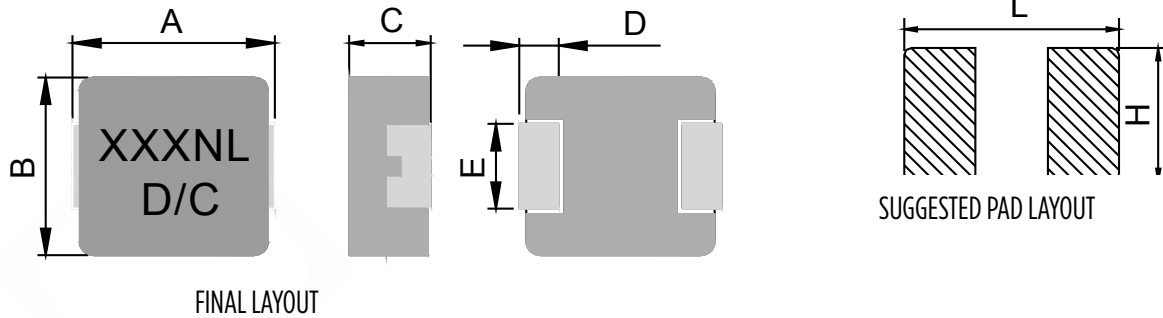

| Series        | A         | B         | C         | D         | E         | L   | G   | H   |
|---------------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|
| PA5404/PM5404 | 7.3+/-0.3 | 6.6+/-0.3 | 4.8+/-0.2 | 1.8+/-0.2 | 3.0+/-0.3 | 8.4 | 2.5 | 3.5 |

All Dimensions in mm.




### TAPE & REEL INFO

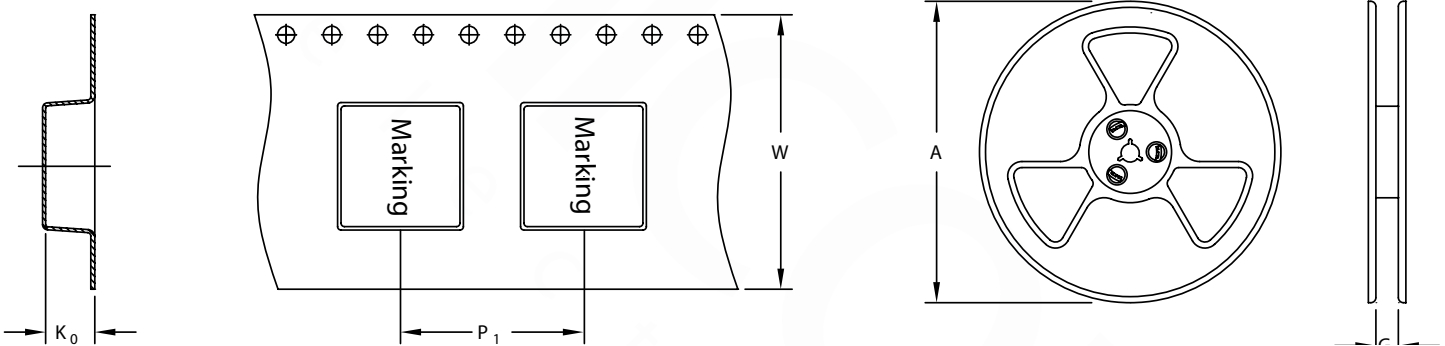

|               | SURFACE MOUNTING TYPE, REEL/TAPE LIST |      |                |    |                |          |
|---------------|---------------------------------------|------|----------------|----|----------------|----------|
|               | REEL SIZE (mm)                        |      | TAPE SIZE (mm) |    |                | QTY      |
|               | A                                     | G    | P <sub>1</sub> | W  | K <sub>0</sub> | PCS/REEL |
| PA5404/PM5404 | Ø330                                  | 16.4 | 12             | 16 | 5.3            | 800      |
















## Typical Performance Curves

### PA5404/PM5404

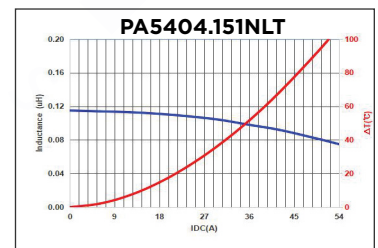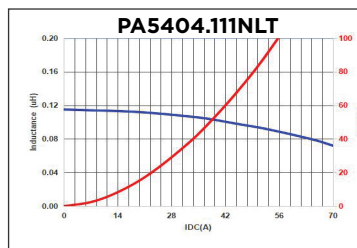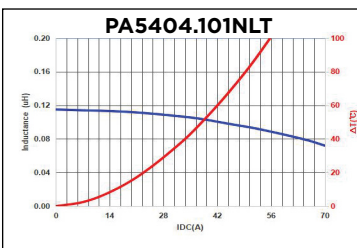














# SMT Power Inductors

High Current Molded Power Inductor - PA5404 & PM5404 Series

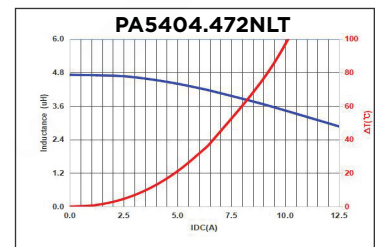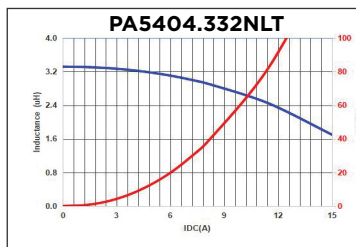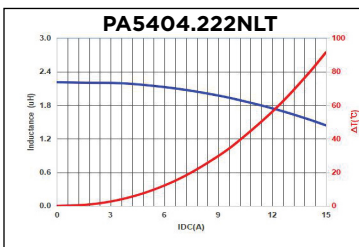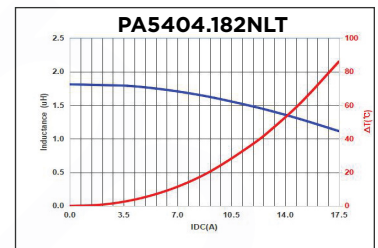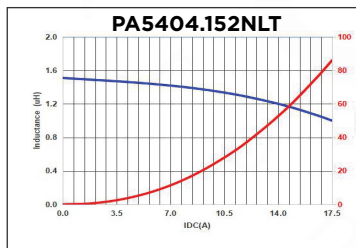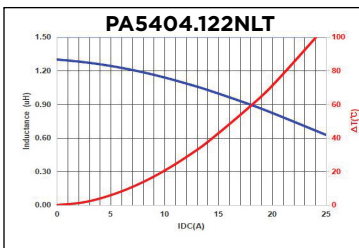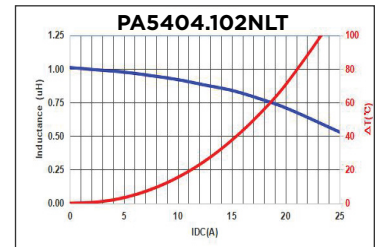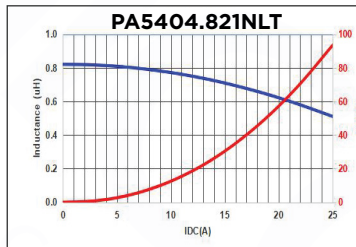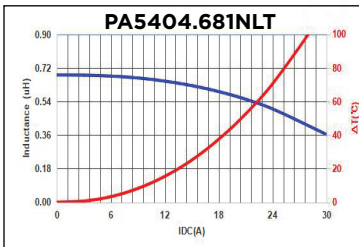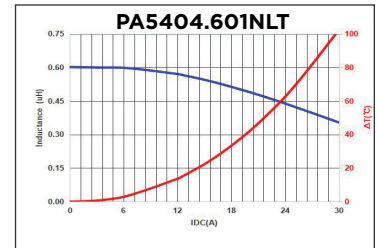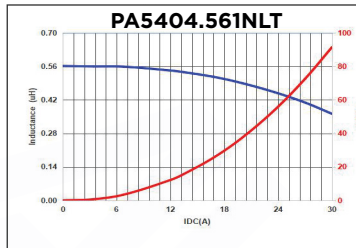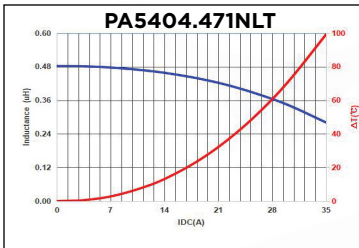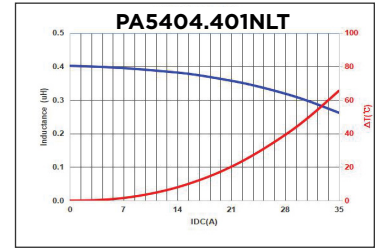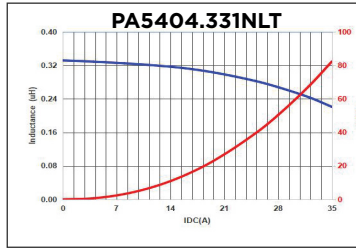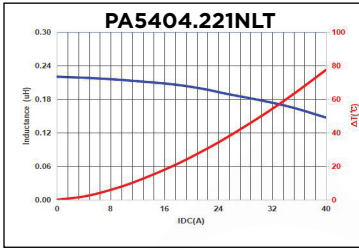

# SMT Power Inductor

Shielded Drum Core - PA4331.XXXNLT Series

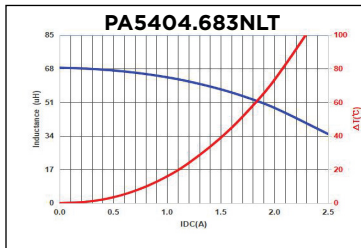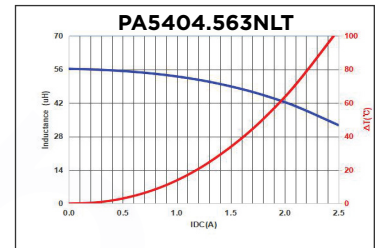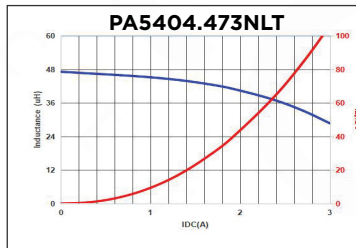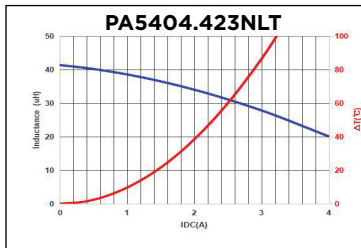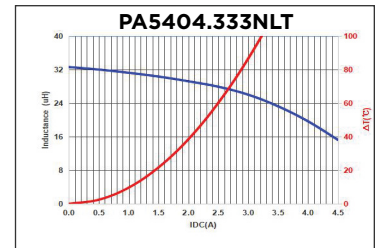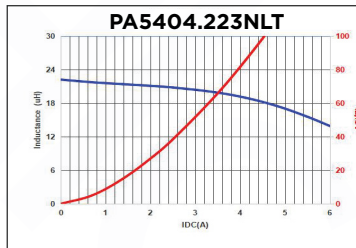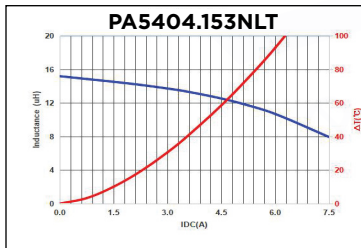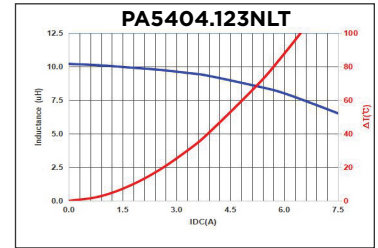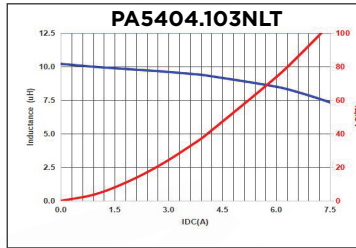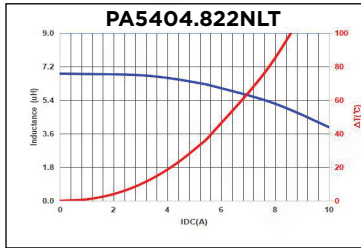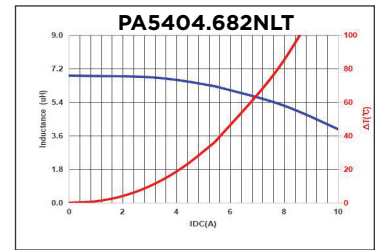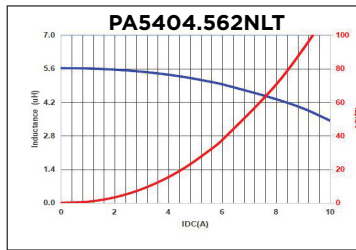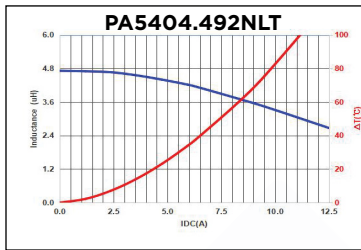

## For More Information:

Americas - [prodinfo\\_power@pulseelectronics.com](mailto:prodinfo_power@pulseelectronics.com) | Europe - [power-apps-europe@pulseelectronics.com](mailto:power-apps-europe@pulseelectronics.com) | Asia - [power-apps-asia@pulseelectronics.com](mailto:power-apps-asia@pulseelectronics.com)



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33  
[info@alcom.be](mailto:info@alcom.be) | [www.alcom.be](http://www.alcom.be)  
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands  
Tel. +31 (0)10 288 25 00 | [info@alcom.nl](mailto:info@alcom.nl) | [www.alcom.nl](http://www.alcom.nl)