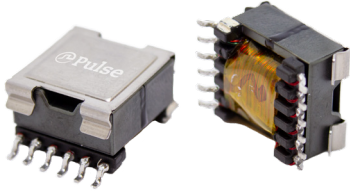






High Frequency Wire Wound Transformers

EFD15+ Flyback Transformer Platform – PAT6261.XXXNL Series

 **Pulse**
a YAGEO company



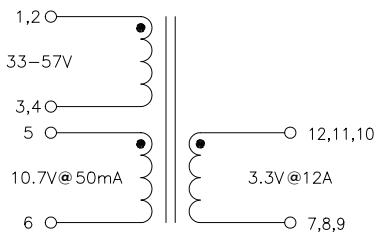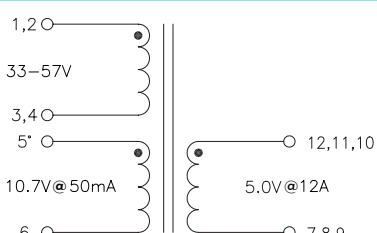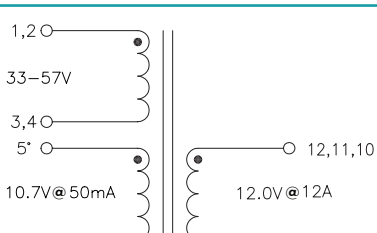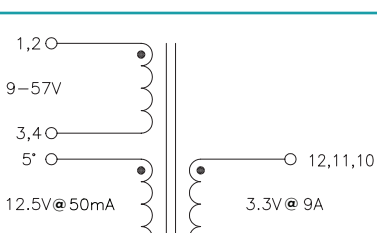- Ⓟ **Height:** 10.5mm Max
- Ⓟ **Footprint:** 16.5mm x 22.23mm
- Ⓟ **Topology:** *Flyback transformer*
- Ⓟ **Functional Insulation**
- Ⓟ **Isolation voltage:** 1500Vrms (hi-pot)
- Ⓟ **Operating Frequency:** 250kHz

Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 125°C			Schematic
PAT6261.001NL	Pri. Inductance	(1, 2 - 3, 4)	24 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	1 μ H max	
	DCR	(1, 2 - 3, 4)	80 m Ω max	
		(5 - 6)	420 m Ω max	
		(12, 11, 10 - 7, 8, 9)	5.3 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		
PAT6261.002NL	Pri. Inductance	(1, 2 - 3, 4)	24 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	1 μ H max	
	DCR	(1, 2 - 3, 4)	70 m Ω max	
		(5 - 6)	370 m Ω max	
		(12, 11, 10 - 7, 8, 9)	6.3 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		
PAT6261.003NL	Pri. Inductance	(1, 2 - 3, 4)	24 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	1 μ H max	
	DCR	(1, 2 - 3, 4)	70 m Ω max	
		(5 - 6)	370 m Ω max	
		(12, 11, 10 - 7, 8, 9)	28 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		
PAT6261.004NL	Pri. Inductance	(1, 2 - 3, 4)	3 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	0.2 μ H max	
	DCR	(1, 2 - 3, 4)	10 m Ω max	
		(5 - 6)	420 m Ω max	
		(12, 11, 10 - 7, 8, 9)	3.50 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		

 **Alcom**
electronics

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33

info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands

Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

High Frequency Wire Wound Transformers

EPD15+ Flyback Transformer Platform – PAT6261.XXXNL Series



Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 125°C			Schematic
PAT6261.005NL	Pri. Inductance	(1, 2 - 3, 4)	3 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	0.2 μ H max	
	DCR	(1, 2 - 3, 4)	10 m Ω max	
		(5 - 6)	450 m Ω max	
		(12, 11, 10 - 7, 8, 9)	4.20 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		
PAT6261.006NL	Pri. Inductance	(1, 2 - 3, 4)	3 μ H \pm 10%	
	Lk. Inductance	(1, 2 - 3, 4) with (12, 11, 10 - 7, 8, 9) shorted	0.2 μ H max	
	DCR	(1, 2 - 3, 4)	12 m Ω max	
		(5 - 6)	375 m Ω max	
		(12, 11, 10 - 7, 8, 9)	8 m Ω max	
Hi-Pot	Pri - Sec	1500 Vrms		

Notes:

- Storage Temperature: -40°C to 125°C
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- Pri/Lk. Inductance value is measured at 100Khz/0.1Vrms.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. (PAT6261.XXXNL becomes PAT6261.XXXNLT). Pulse complies with industry standard tape and reel specification EIA481.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$

- In high volt- μ sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:


$$CoreLoss \text{ (W)} = 4.6E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * \Delta(A)$
- For parties interested in K1 Factor values please contact Pulse Electronics.

High Frequency Wire Wound Transformers


EFD15+ Flyback Transformer Platform – PAT6261.XXXNL Series

PAT6261.XXXNL

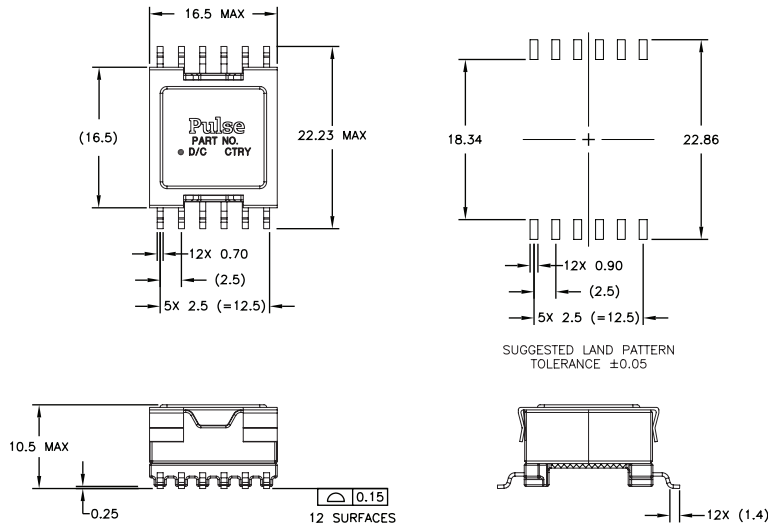Mechanical



Final Outline



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

For More Information:

Americas - proinfo_power_americas@yageo.com | Europe - proinfo_power_emea@yageo.com | Asia - proinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.