

TQMa8MxNL

Arm® Family



Embedded Cortex®-A53 module based on i.MX8M Nano with enhanced Audio properties.

HIGHLIGHTS


- ▶ Advanced Audio properties
- ▶ Integrated Cortex® M7
- ▶ High-speed communication via 1x Gbit Ethernet and 1x USB 2.0 interface
- ▶ Low power consumption (typ. 3 W)
- ▶ Integrated security functions

TECHNICAL SPECIFICATION

CPU	i.MX8M Nano Solo/ i.MX8M Nano Solo Lite i.MX8M Nano Dual/ i.MX8M Nano Dual Lite i.MX8M Nano Quad/ i.MX8M Nano Quad
Interfaces	Up to 1x Ethernet 10/100/1000 Mbit Up to 1x USB 2.0 Host interface Up to 4x UART
Periphery interfaces	Up to 3x SDIO/eMMC Up to 4x I2C Up to 3x SPI Up to 1x QSPI Up to 10x I ² S Up to 5x SAI Up to 8x PDM Mic. Up to 1x SPDIF
Graphic	LCD Interface: 1x MIPI DSI; (4 Lanes) Camera: 1x MIPI CSI2 (4 Lanes)

Memory	LPDDR4-SDRAM: Up to 2 GB Quad SPI NOR: Up to 256 MB eMMC Flash: Up to 64 GB EEPROM: 0/64-kbit
Other	Real Time Clock (RTC) Temperature sensor CPU JTAG interface
Power supply	5 V
Ambient conditions	Standard temperature range: -25°C...+85°C Extended temperature range: -40°C...+85°C
Dimensions	38 mm x 38 mm
Plug-in system	LGA (Land Grid Array) 280 pins
Operating systems	Linux
Operating systems on request	Android

BLOCK DIAGRAM TQMa8MXNL

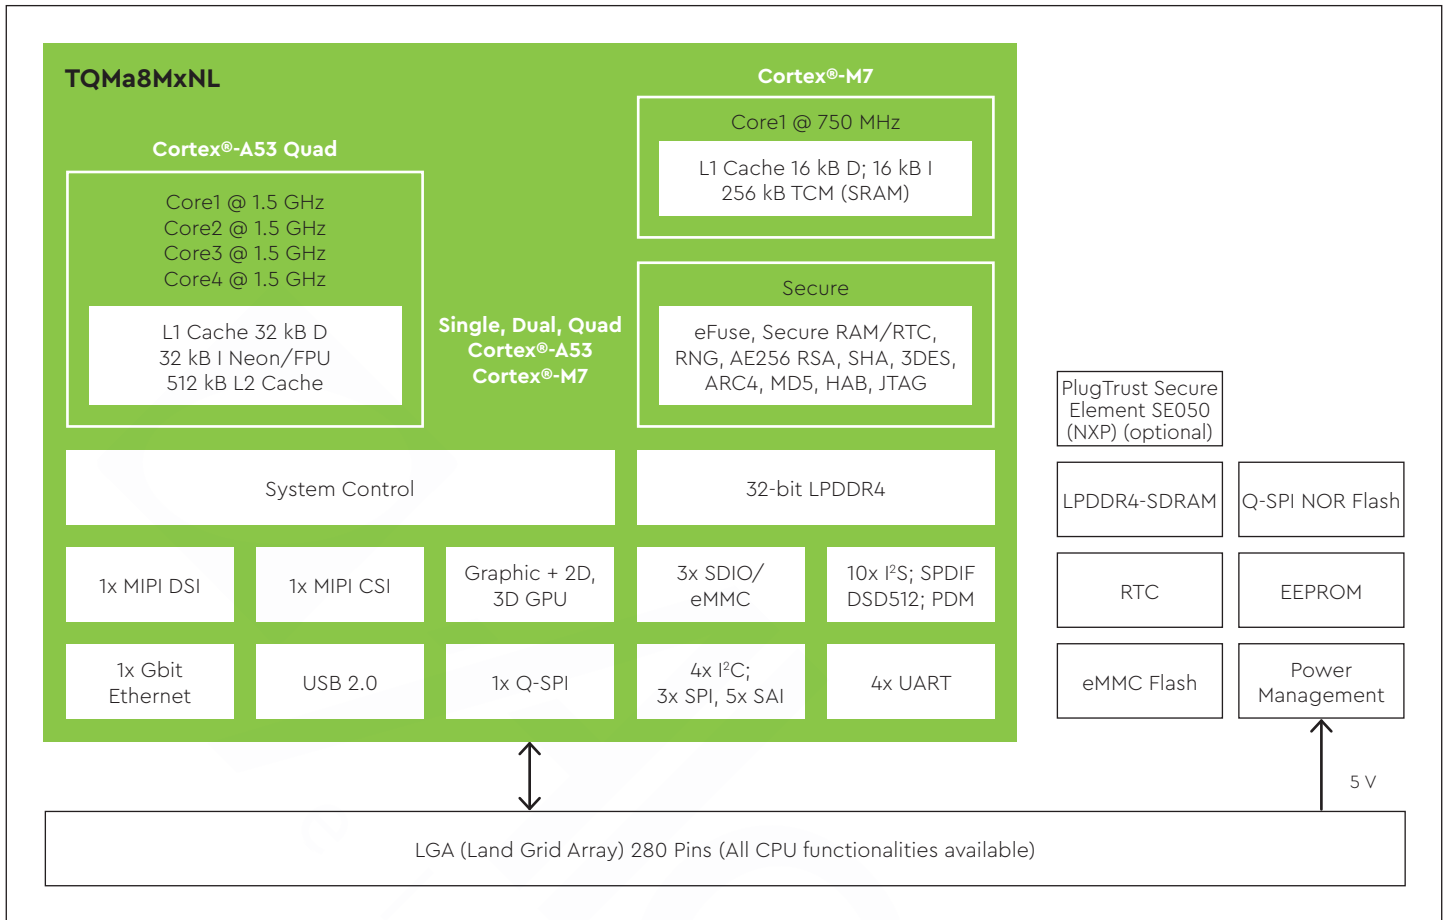

ORDERING INFORMATION

TQMa8MSNL-AA TQMa8MSNL-AA, i.MX8M Nano Single Cortex®-A53/1.4 GHz, 8 GB eMMC Flash, 1 GB LPDDR4, 64 kB EEPROM, RTC, -25°C...+85°C

TQMa8MDNL-AA TQMa8MDNL-AA, i.MX8M Nano Dual Cortex®-A53/1.4 GHz, 8 GB eMMC Flash, 1 GB LPDDR4, 64 kB EEPROM, RTC, -25°C...+85°C

TQMa8MQNL-AA TQMa8MQNL-AA, i.MX8M Nano Quad Cortex®-A53/1.4 GHz, 8 GB eMMC Flash, 1 GB LPDDR4, 64 kB EEPROM, RTC, -25°C...+85°C

Other configurations on request

STKa8MxNL-AA STKa8MxNL (Eval Kit) with TQMa8MxNML-AA, i.MX8M Nano Quad Cortex®-A53/1.4 GHz, 1 GB LPDDR4, 8 GB eMMC Flash, 64 kB EEPROM, RTC, 2x USB 2.0 HOST, 1x ETH 10/100/1000, 1x eDP, 1x LVDS, 1x MIPI CSI, 1x Mini PCIe (only USB) + SIM Card, Audio, Temperature sensor, Reset-Button, SD Card interface, Power Supply, 4 GB SD card, Cables

Starterkit STKa8MxNL set The core of the STKa8MxNL set is the TQMa8MxNL module with a Quad Cortex®-A53 CPU. The components contained in the starter kit constitute a modular system enabling you to develop your own product ideas. Development of graphic interfaces can be started immediately using the prepared combination of closed display unit and starter kit that are matched to each other. To develop your own hardware you can use the certified and qualified circuit components of the starter kit in your own designs.