

TQMa8XxS

Arm® Family



Embedded Cortex®-A35 SMARC 2.0/2.1 module based on i.MX8X with high computing power combined with high-speed interfaces.

HIGHLIGHTS

- ▶ Graphic with 4K support
- ▶ DSP for audio processing
- ▶ High-speed communication via 2x Gbit, Ethernet, 1x PCIe and 1x USB 3.0 interface
- ▶ Low power consumption (typ. 4 W)
- ▶ Integrated 1x Cortex®-M4 CPU (Real-time/security)
- ▶ Integrated security functions
- ▶ 2x CAN FD

Based on




TECHNICAL SPECIFICATION

CPU	Cortex®-A35 Technology i.MX8 QuadXPlus, i.MX8 DualXPlus i.MX8 DualX
Interfaces	Up to 2x Ethernet 10/100/1000 Mbit (IEEE 1588) Up to 1x USB 3.0 Up to 2.0 OTG Up to 5x USB 2.0 (USB Hub) Up to 2x UART Up to 2x CAN FD
Periphery interfaces	Periphery interfaces 1x SDIO/MMC 2x I ² C 1x SPI 1x I ² S 1x PCIe GPIO
Graphic	2x LVDS, 1x eDP 1x Camera Sensor Interface (CSI MIPI)
Memory	DDR3L-SDRAM: Up to 2 GB Quad SPI NOR: Up to 256 MB Up to 64 GB eMMC Flash EEPROM: 0/64 kbit

Other	Real Time Clock (RTC) Temperature sensor CPU JTAG interface (optional)
Power supply	3,3 V (optional 3.0 V ... 5.25 V)
Ambient conditions	Standard temperature range: -25°C...+85°C Extended temperature range: -40°C...+85°C
Dimensions	82 mm x 50 mm
Plug-in system	SMARC 2.0/2.1 Board-to-board plug-in system 314 pins
Operating systems	Linux
Operating systems on request	QNX, Android

BLOCK DIAGRAM TQMa8XxS

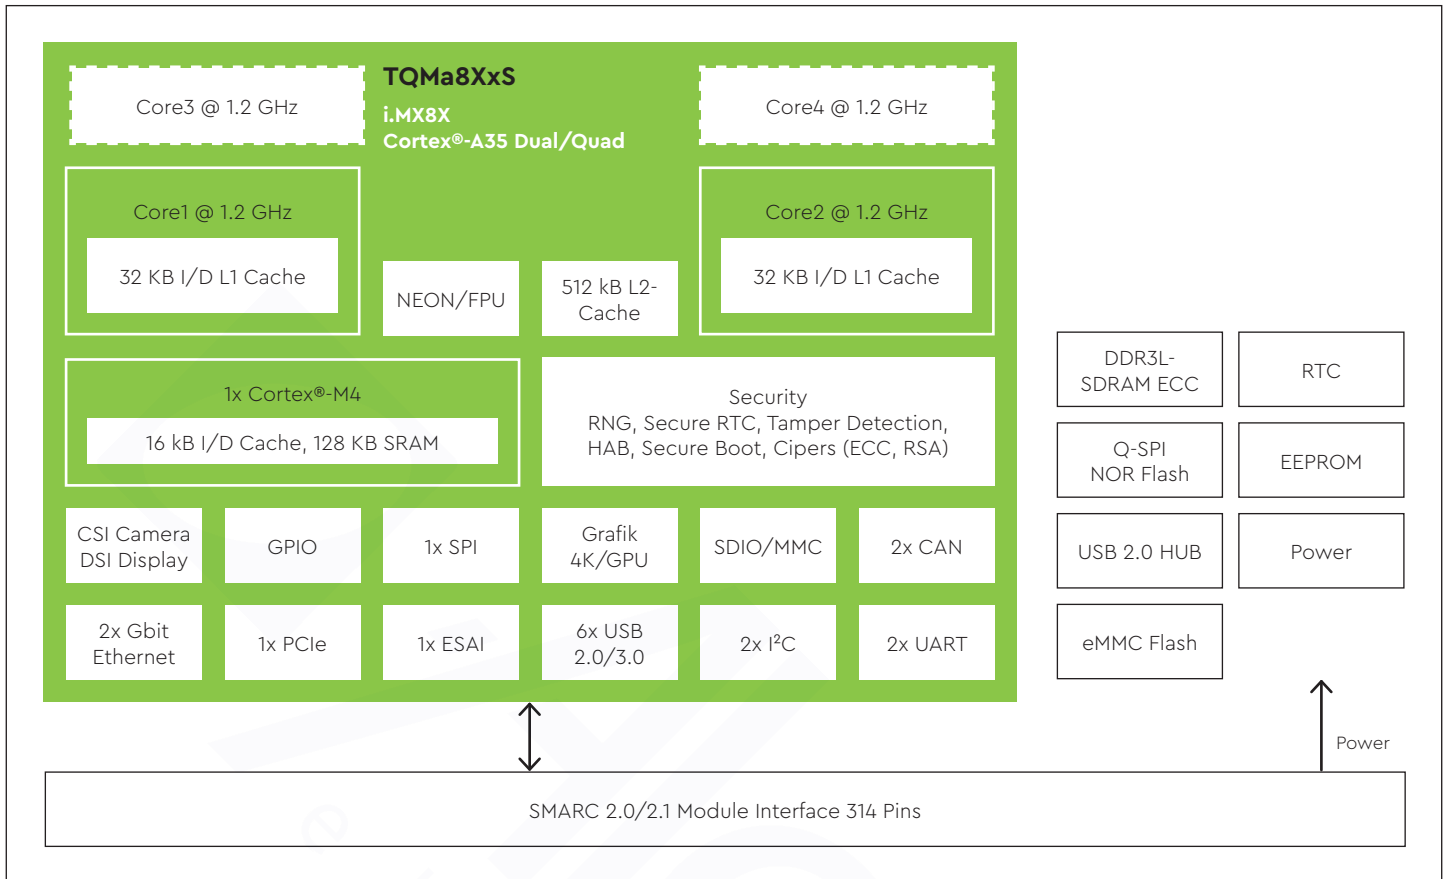

ORDERING INFORMATION

TQMa8XDS-AA (Prototypes available)	i.MX8XD/typ 1.0 GHz/max 1.2 GHz, 8 GB eMMC-Flash, 1 GB DDR3L-SDRAM, 64 kB EEPROM, RTC, 2x ETH, w/o eDP, -25°C...+85°C
TQMa8XDPS-AA (Prototypes available)	i.MX8X Dual Plus/typ 1.0 GHz/max 1.2 GH, 8 GB eMMC-Flash, 1 GB DDR3L-SDRAM, 64 kB EEPROM, RTC, 2x ETH, w/o eDP, -25°C...+85°C
TQMa8XQPS-AA (Prototypes available)	i.MX8X Quad Plus/typ 1.0 GHz/max 1.2 GH, 8 GB eMMC-Flash, 1 GB DDR3L-SDRAM, 64 kB EEPROM, RTC, 2x ETH, w/o eDP, -25°C...+85°C

Other configurations on request

STKa8XxS-AA (Prototypes available)	STKa8XxS (Eval Kit) with TQMa8XxS-AA, i.MX8Xx/typ 1.0 GHz/max 1.2 GHz, 1 GB DDR3L, 8 GB eMMC Flash, 64kB EEPROM, 3x RS232, 2 x CAN FD separated, 1x USB 3.0 OTG, 1x USB 3.0 HOST, 1x USB 2.0 HOST, 2x ETH 10/100/1000, 1x Display Port, 2x LVDS/DSI, 1x PCIe, Audio, RTC, Temperature sensor, Reset-Button, SD interface, Power Supply, 4 GB SD card, Cables
--	--

Starterkit STK8XxS set
The core of the STKa8XxS set is the TQMa8XxS module with a i.MX8X Cortex®-A35 CPU. The components contained in the starter kit constitute a modular system enabling you to develop your own product ideas. Development of graphic interfaces can be started immediately using the prepared combination of closed display unit and starter kit that are matched to each other. To develop your own hardware you can use the certified and qualified circuit components of the starter kit in your own designs.

TQ-Systems GmbH

Mühlstraße 2 | Gut Delling | 82229 Seefeld | Germany
Tel.: +49 8153 9308-0 | info@tq-group.com | tq-group.com

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl