



**Product Name:** EG-17BW Series\_ High-Accuracy GNSS Active Antenna

**Part Number:** EG-17BW-AS-A01

**Features:**

- Substantial and environmental-resistance structure
- Proprietary antenna design provides the flexibility to reach a range of operational goals
- IP67 grade waterproof
- Supports GPS, QZSS, GLONASS, Galileo, and BeiDou systems
- Multi-Constellation and Signal-Frequency for faster initialization

**Applications:**

- Geospatial Surveys
- Single & Multiple frequencies RTK positioning
- Vehicle Tracking
- Security Surveillance
- Precise Guidance



# High-Accuracy GNSS Active Antenna

**MODEL: EG-17BW-AS-A01**

WI-RD-D-271 V1.0

© San Jose Technology, Inc.  
All specifications subject to change without notice.

## I. Specifications:

Category	Specifications				
<b>Active Antenna Performance</b>					
<b>Polarization</b>	R.H.C.P. (Right Handed Circular Polarization)				
<b>Application Band</b>	BeiDou	GPS	GLONASS	L2	L5
<b>Frequency (MHz)</b>	1561 ±2.046	1575.42 ±1.023	1602 ±5	1227 ±11	1176.45 ±12
<b>Gain (dB)</b>	41	41	40	41	39
<b>Noise (dB)</b>	7.79	3.81	4.39	1.06	1.07
<b>Low Noise Amplifier</b>					
<b>Frequency (MHz)</b>	1561 ~ 1602		1227	1176	
<b>Gain (dB) (typical)</b>	43		43	45	
<b>Noise Figure (dB) (typical)</b>	3.6		2.4	1.9	
<b>Supply Voltages (V)</b>	3.3 ~ 15 DC				
<b>Current Consumption (mA) (typical)</b>	30 @ 5V DC				
<b>Output V.S.W.R</b>	2.0 max.				
<b>Output Impedance (Ω)</b>	50				
<b>GNSS _ Out of Band Rejection</b>					
<b>Frequency (MHz)</b>	600 ~ 800		1630 ~ 3000		
<b>Gain (dB)</b>	30		45		
<b>ESD</b>					
<b>Contact (KV)</b>	± 8				
<b>Air (KV)</b>	± 15				




<b>Cable and Connector</b>	
<b>Cable</b>	RG-58 (Length is suggested between 3~5M)
<b>Connector</b>	TNC (SBJ)
<b>Mount</b>	5/8 inch female thread
<b>Physical Condition</b>	
<b>Dimension (mm)</b>	φ140(D) x 49(H)
<b>Weight (g)</b>	407
<b>Environmental Conditions</b>	
<b>Operation Temperature</b>	-40 ~ +85 °C
<b>Storage Temperature</b>	-40 ~ +85 °C
<b>Waterproof Resistant</b>	IP67
<b>Relative Humidity</b>	+40±2 °C, 90~95% R.H
<b>Electronic Discharge</b>	EN61000-4-2: 20KV Air-discharge ; 8KV Contact-discharge
<b>Enclosure Rating</b>	IEC 60529 standard: IP67
<b>Solar Radiation</b>	MIL-STD 810E, SAE 1961
<b>Mechanical Shock</b>	MIL-STD-810G, Method 516.6 a. Procedure I, Functional shock
<b>Vibration</b>	Antenna Non-Working 5G/30min Antenna Working 2.5G/30min
<b>Chemical Resistance</b>	Alcohol · Plastic and Vinyl cleaner · Glass cleaner · Saline Solution · Soapy water




## II. Antenna Technical Parameters:

1164 MHz ~ 1283 MHz Peak Gain

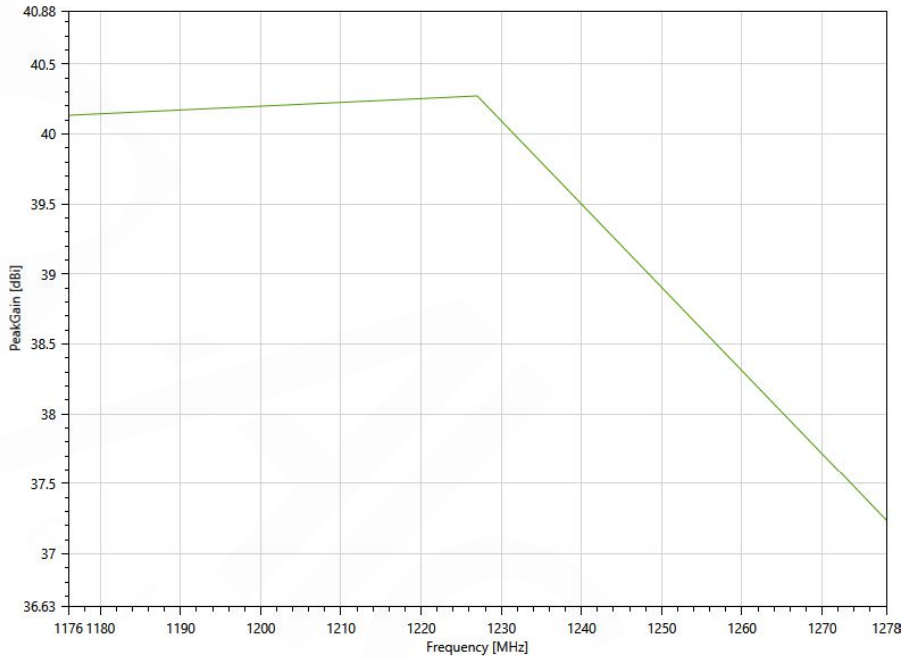


1559 MHz ~ 1610 MHz Peak Gain

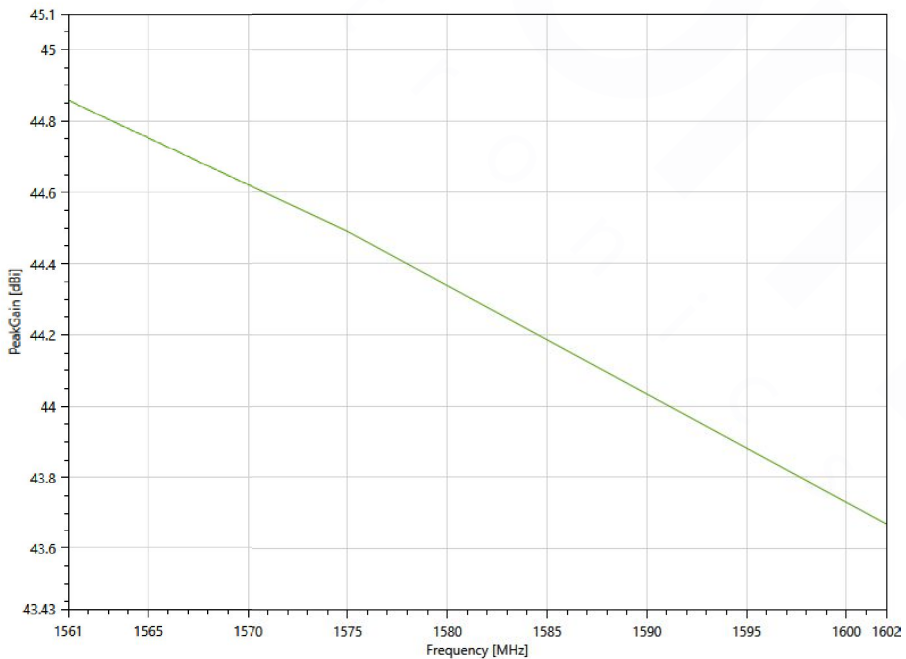

© San Jose Technology, Inc.  
 All specifications subject to change without notice.




### Active Circuit – L1 LNA Gain & N.F Measurement

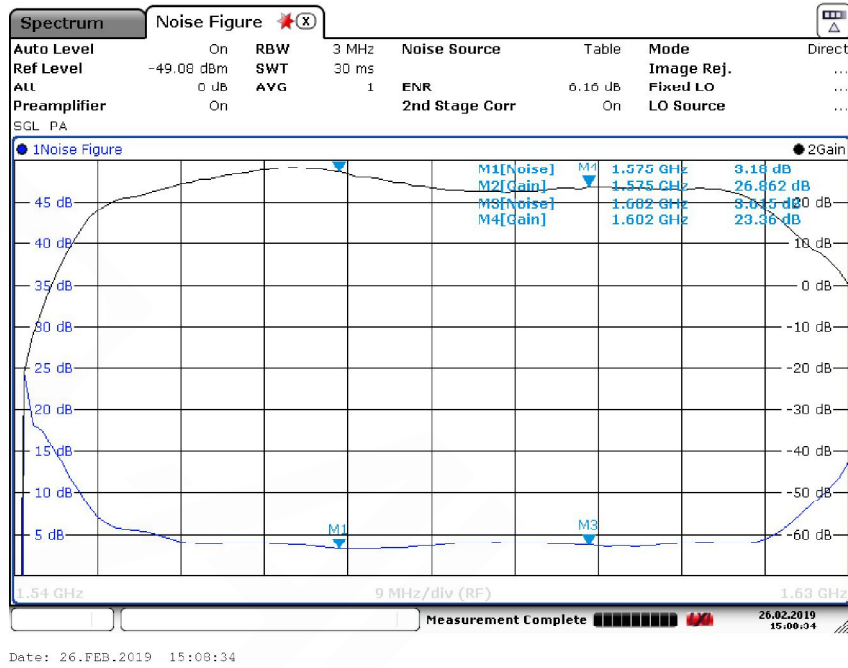


© San Jose Technology, Inc.  
All specifications subject to change without notice.

### Active Circuit – L2 / L5 LNA Gain Measurement

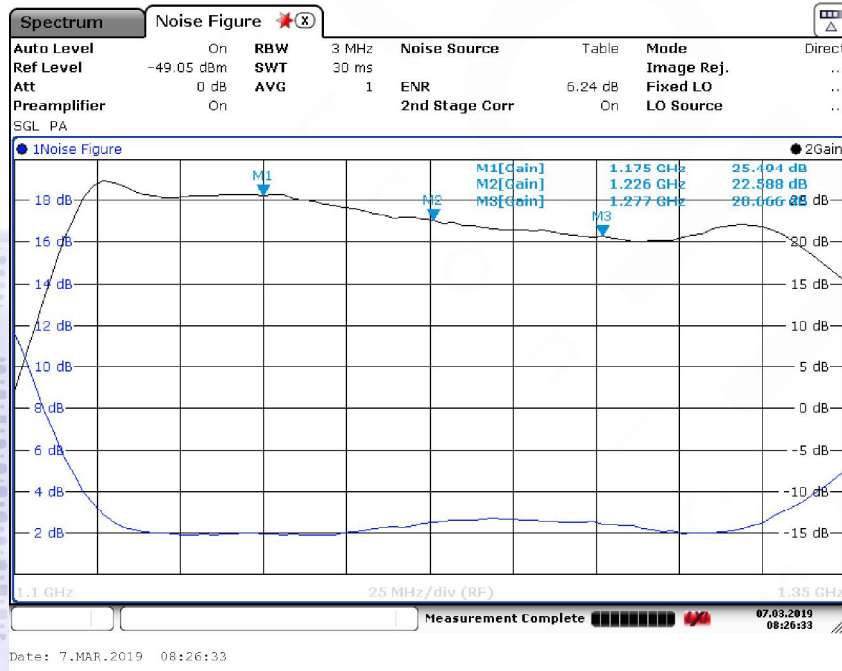


### Active Circuit – L2 / L5 N.F. Measurement

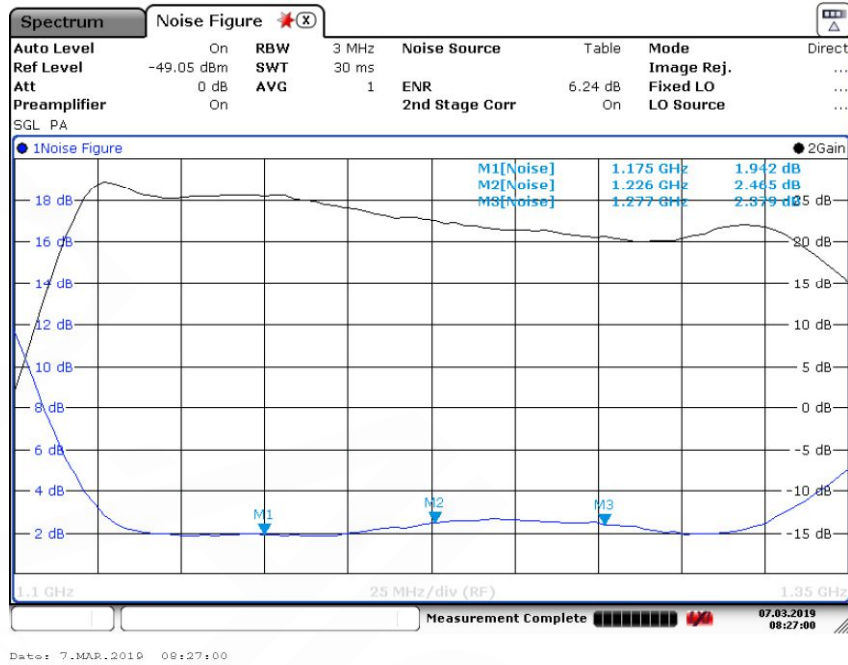



© San Jose Technology, Inc.  
All specifications subject to change without notice.

### Out Of Band Rejection (dB)

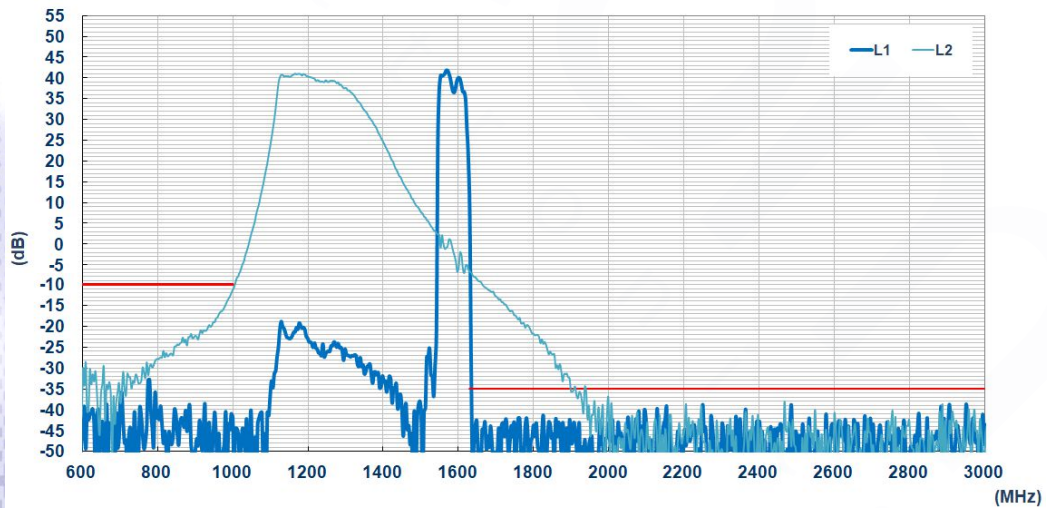

SANAV  
2019.12.19  
DCC

### Noise Figure & Gain (dB)



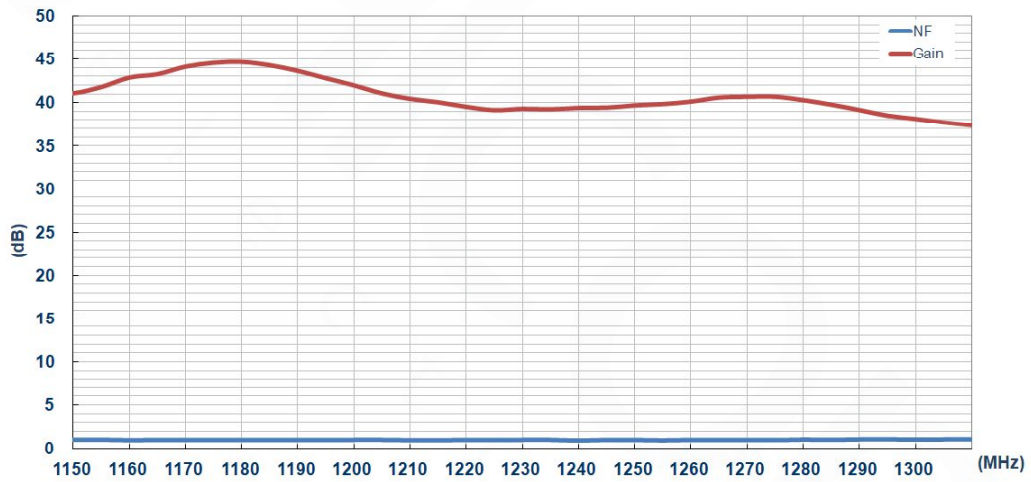
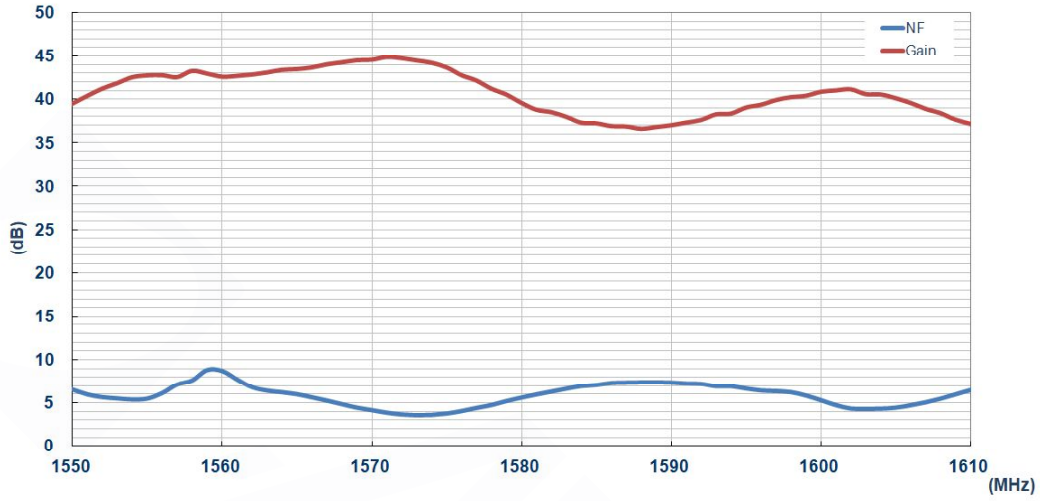


© San Jose Technology, Inc.  
All specifications subject to change without notice.



SANAV  
 2019.12.19  
 DCC

### III. 3D Radiation Pattern:

1176MHz (dBi)

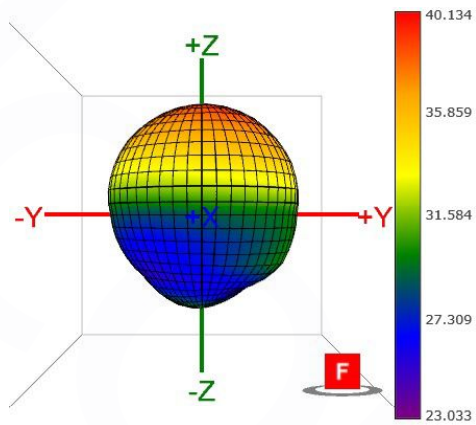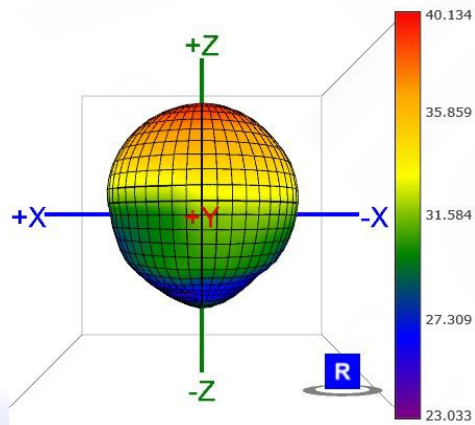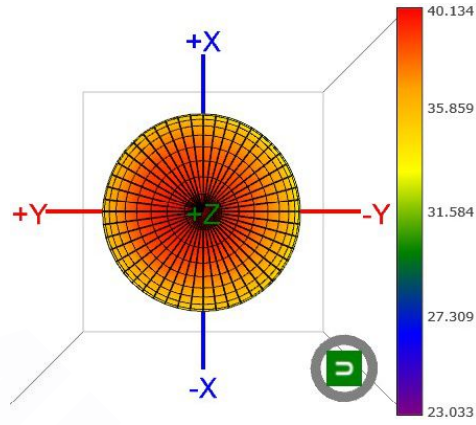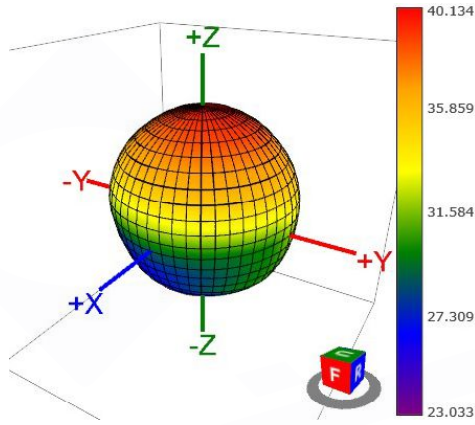



1227MHz (dBi)

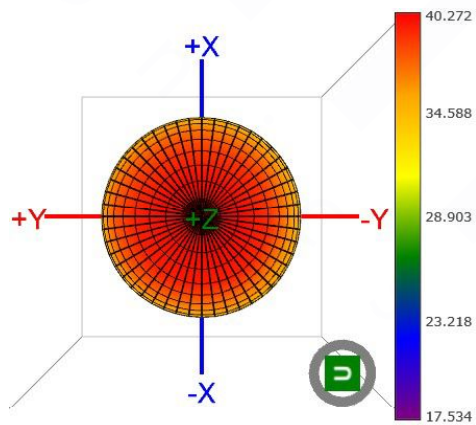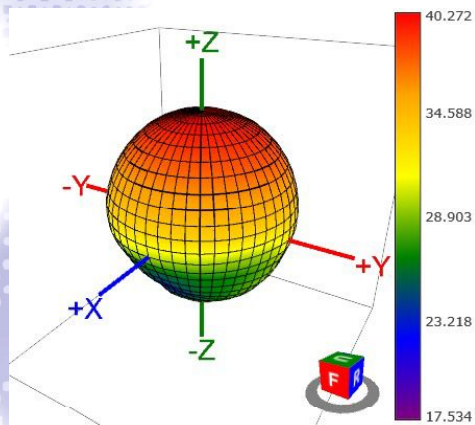





© San Jose Technology, Inc.  
All specifications subject to change without notice.

SANAV  
2019.12.19  
DCC



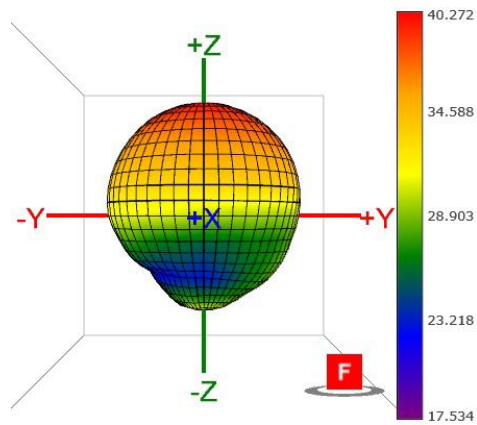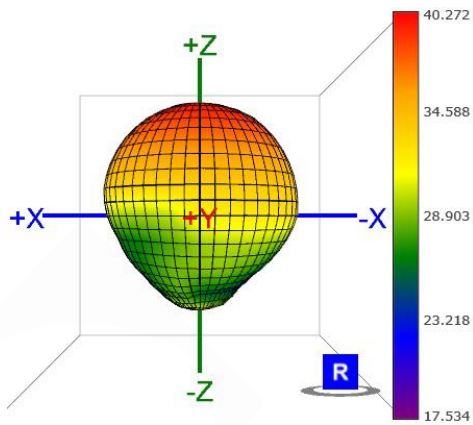



1278MHz (dBi)

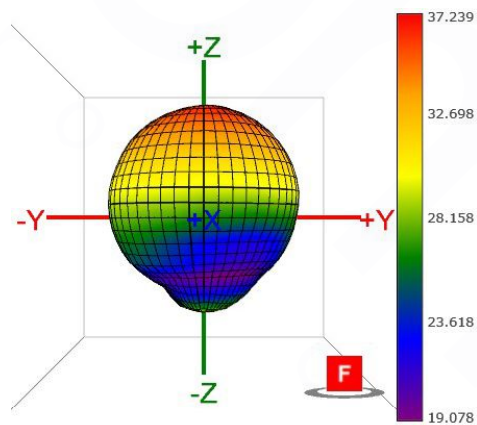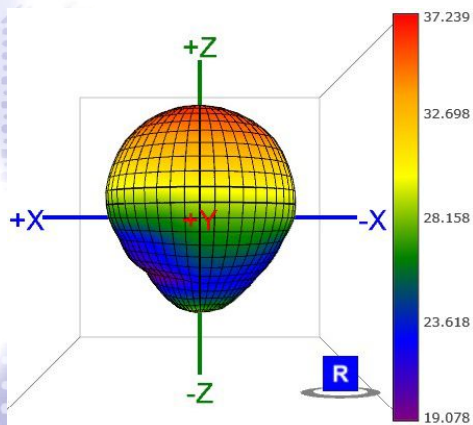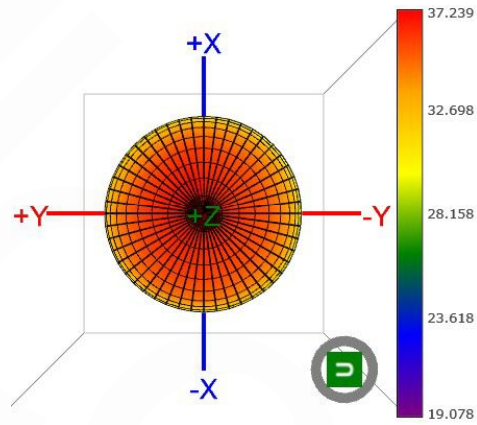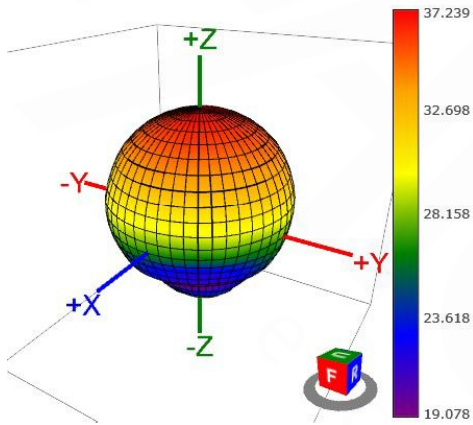


© San Jose Technology, Inc.  
All specifications subject to change without notice.

SANAV  
2019.12.19  
DCC

### 1561MHz (dBi)

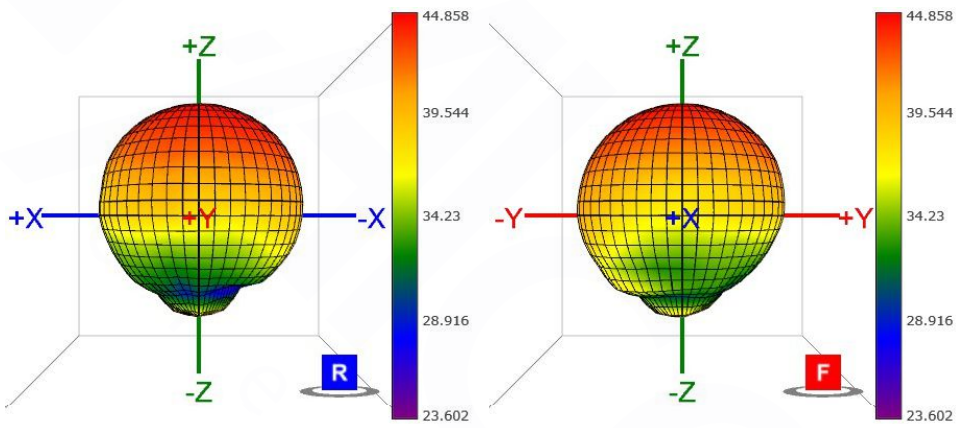
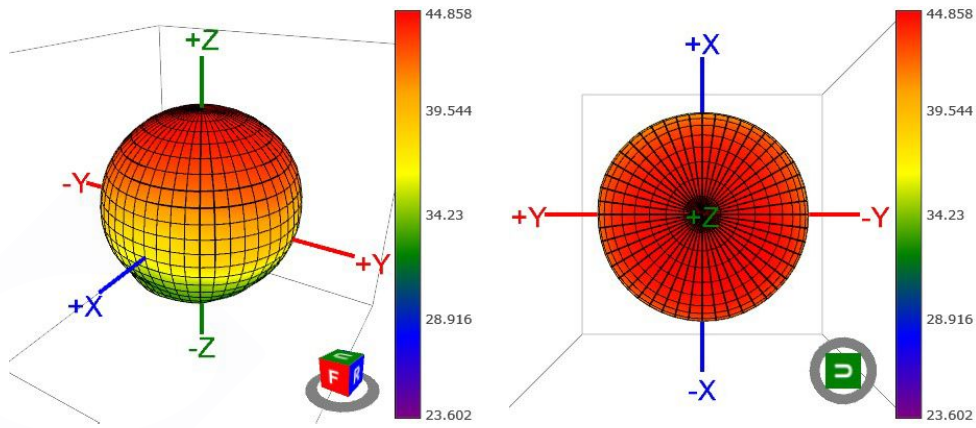


### 1575MHz (dBi)




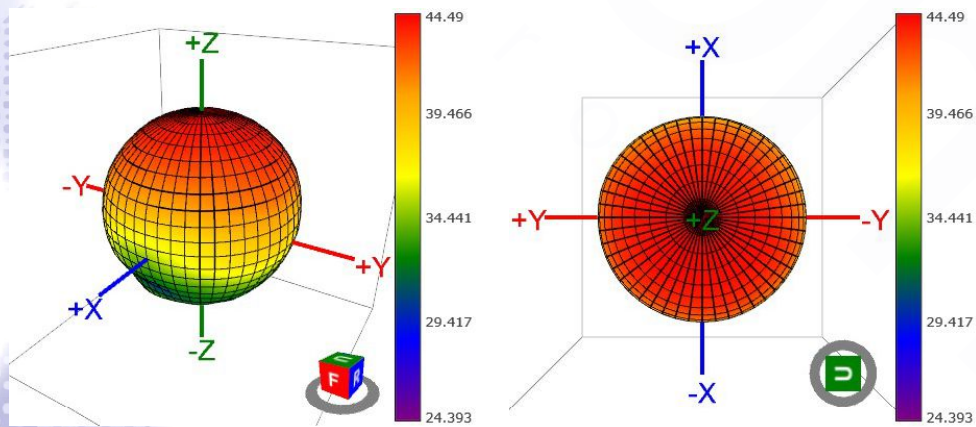


© San Jose Technology, Inc.  
All specifications subject to change without notice.

SANAV  
2019.12.19  
DCC

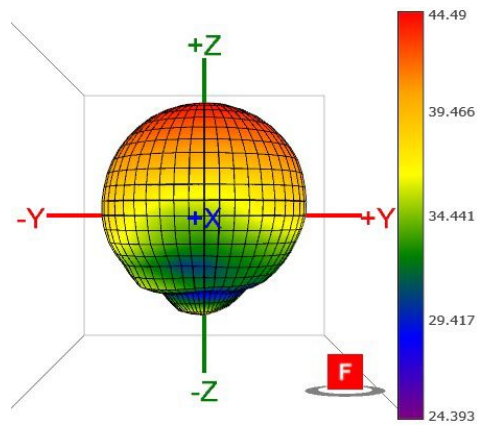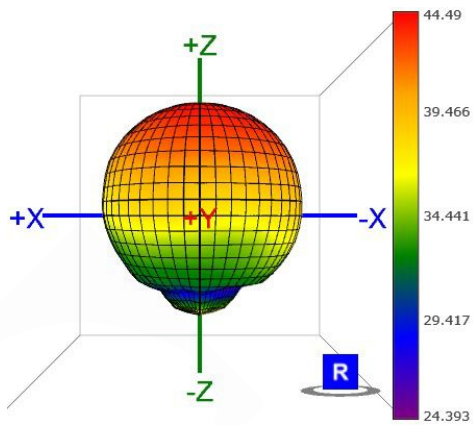


1602MHz (dBi)

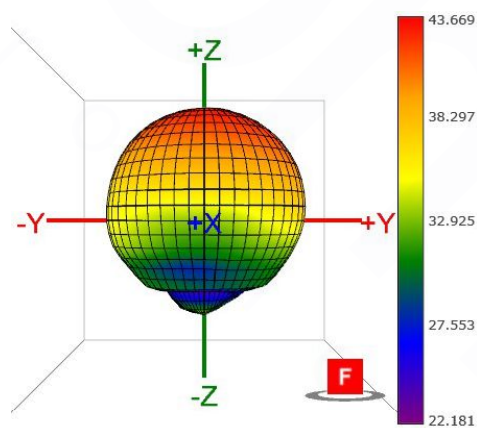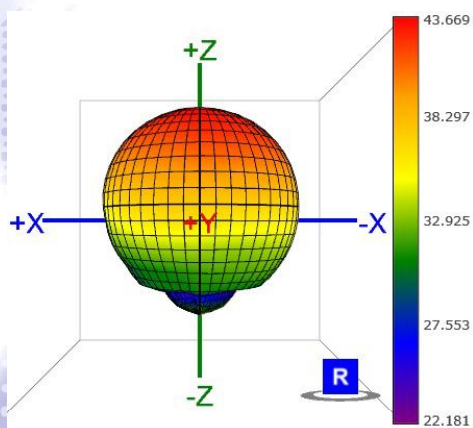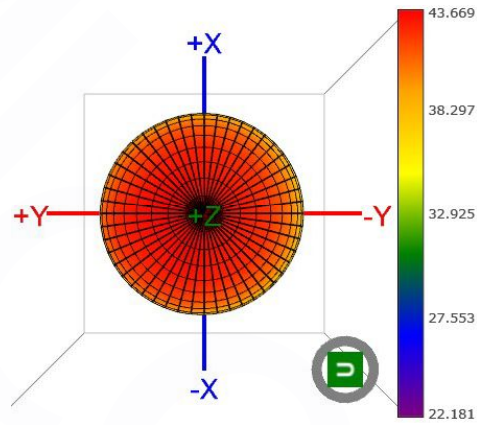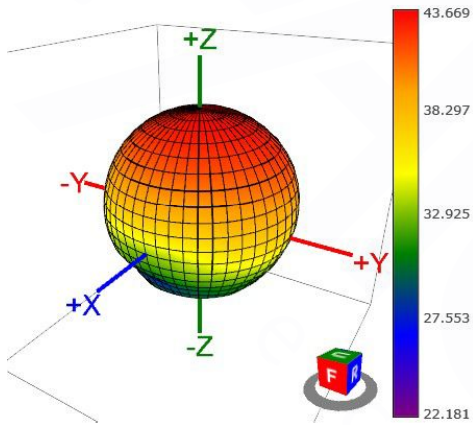

© San Jose Technology, Inc.  
All specifications subject to change without notice.

SANAV  
2019.12.19  
DCC

#### IV. Mechanical Drawing (Unit:mm):

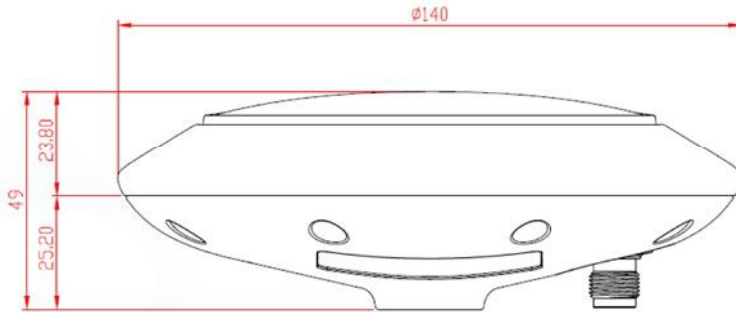

© San Jose Technology, Inc.  
All specifications subject to change without notice.

