

2410TD

High current time-delay SMT Brick fuse



Product features

- 2410 (6125 metric) surface mount package
- Time-delay
- Designed to UL248
- Overcurrent protection of systems up to 250 Vac/60 Vdc
- Current rating: 500 mA to 7.0 A
- High inrush withstand capability
- Moisture sensitivity level: (MSL): 1

Applications

- Power supplies
- Servers
- LED lighting drivers
- Appliances and white goods
- LCD monitor/backlight inverters
- Vac chip-on-board (COB) lighting
- Industrial electronics and computing

Agency information

cURus Recognition file number: E19180



Environmental compliance



Ordering part number

	TR1- 2410TD 7 -R
Packaging code	TR1
Family code	2410TD
Ampere rating	7
RoHS compliant	-R

Packaging prefix

TR1-(1000 parts on a 8.66" diameter tape and reel, 1 reel per box)

PK-(1000 parts on a 8.66" diameter tape and reel, 10 reels per carton)



Powering Business Worldwide



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Electrical characteristics

Amp Rating	% of Amp rating	Opening time
500 mA to 7 A	100	4 hours minimum
500 mA to 7 A	200	1 to 60 seconds

Product specifications


Part number	Current rating (A)	Voltage rating (Vac)	Voltage rating (Vdc)	Interrupting rating ¹ at rated voltage (A)	Interrupting rating ¹ at rated voltage (A) (Vdc)	Typical DC cold resistance ² (ohm)	Typical voltage drop (mV)	Part marking
2410TD500-R	0.5	250	60	50	50	0.4025	245	T0.5
2410TD750-R	0.75	250	60	50	50	0.235	250	T0.75
2410TD1-R	1	250	60	50	50	0.168	256	T1
2410TD1-5-R	1.5	250	60	50	50	0.063	125	T1.5
2410TD2-R	2	250	60	50	50	0.048	133	T2
2410TD2-5-R	2.5	250	60	50	50	0.035	130	T2.5
2410TD3-R	3	250	60	50	50	0.0263	97	T3
2410TD3-5-R	3.5	250	60	50	50	0.0195	95	T3.5
2410TD4-R	4	250	60	50	50	0.0185	106	T4
2410TD5-R	5	250	60	50	50	0.0133	100	T5
2410TD7-R	7	250	60	50	50	0.0087	99	T7

1. AC Interrupting rating (measured at designated voltage, 100% power factor random closing); DC Interrupting rating (measured at designated voltage, time constant of less than 50 microseconds, battery source)


2. DC Cold Resistance measured at <10% of rated current in the ambient temperature of +25 °C

Dimensions- mm

Drawing not to scale

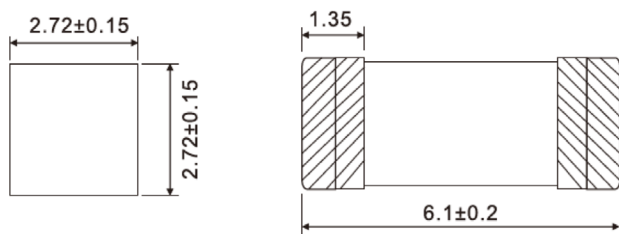

Recommended pad layout



General specifications

Operating temperature: -55 °C to +125 °C with proper derating factor applied

Soldering heat resistance: MIL-STD-202 method 210

Solderability test: J-STD-002, method B1

Thermal shock: MIL-STD-202 method 107, -55 °C/+125 °C, 200 cycles

Humidity bias: MIL-STD-202 method 103, 1000 hours


Vibration: MIL-STD-202F method 204

Mechanical shock: MIL-STD-202 method 213, condition A

Life test: MIL-STD-202 method 108, test condition D


Packaging information - mm

1000 parts per 8.66" diameter reel (EIA-481 compliant)
Drawing not to scale

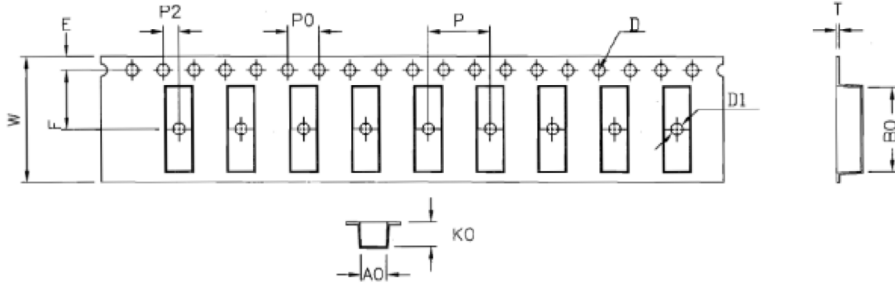


Dimension	millimeter
W	16.00
A0	2.95
B0	6.30
K0	3.00
P0	4.00
P	8.00
P2	2.00
T	0.35
E	1.80
F	7.50
D	1.50
D1	1.50

Reel dimension- mm

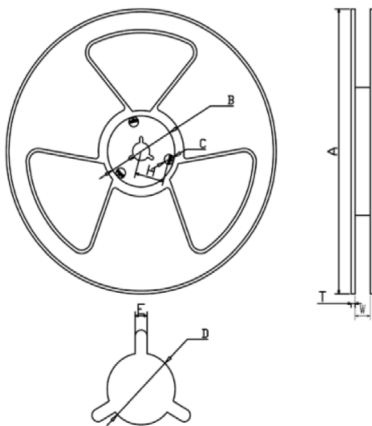


Dimension	millimeter
A	220
B	58
D	13
E	2.3
W	21
T	1.6


Temperature derating curve

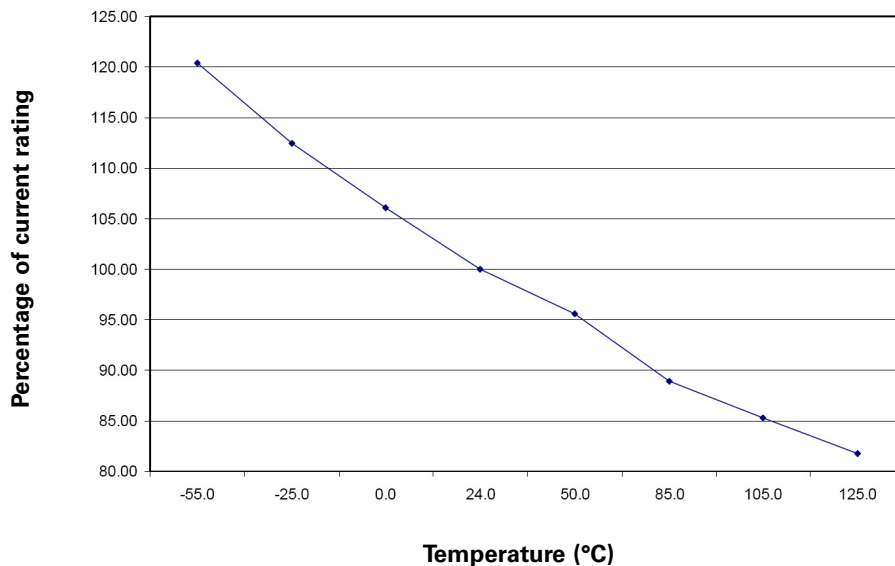


Current vs. time curve

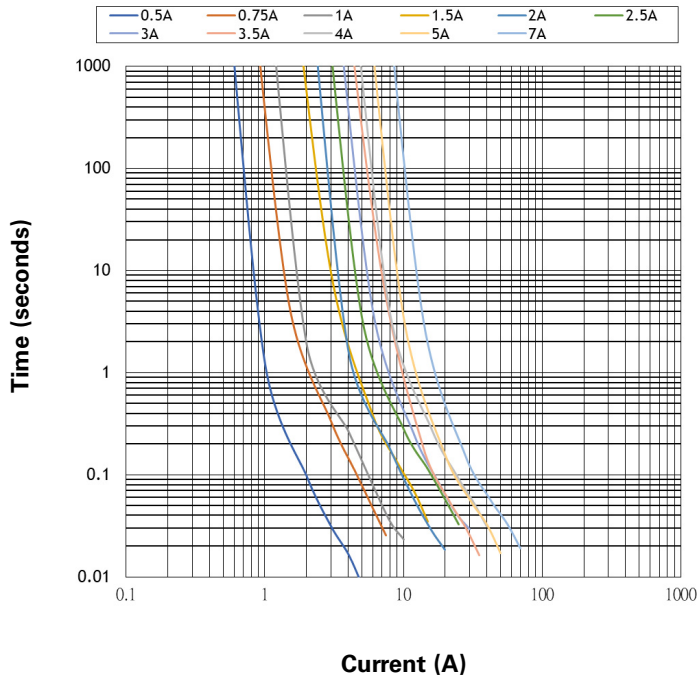


I²t vs time curve

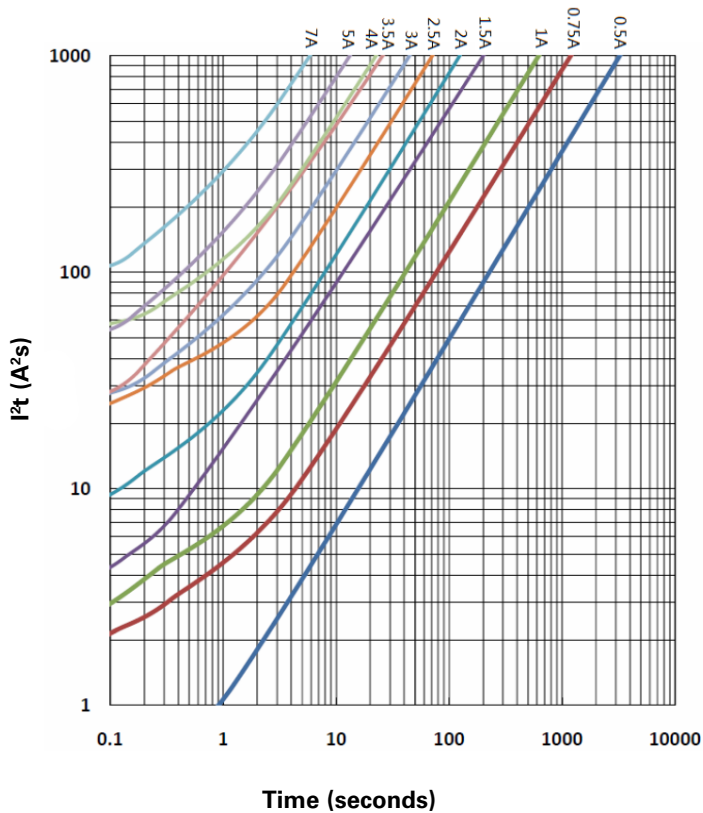

I²t vs current curve

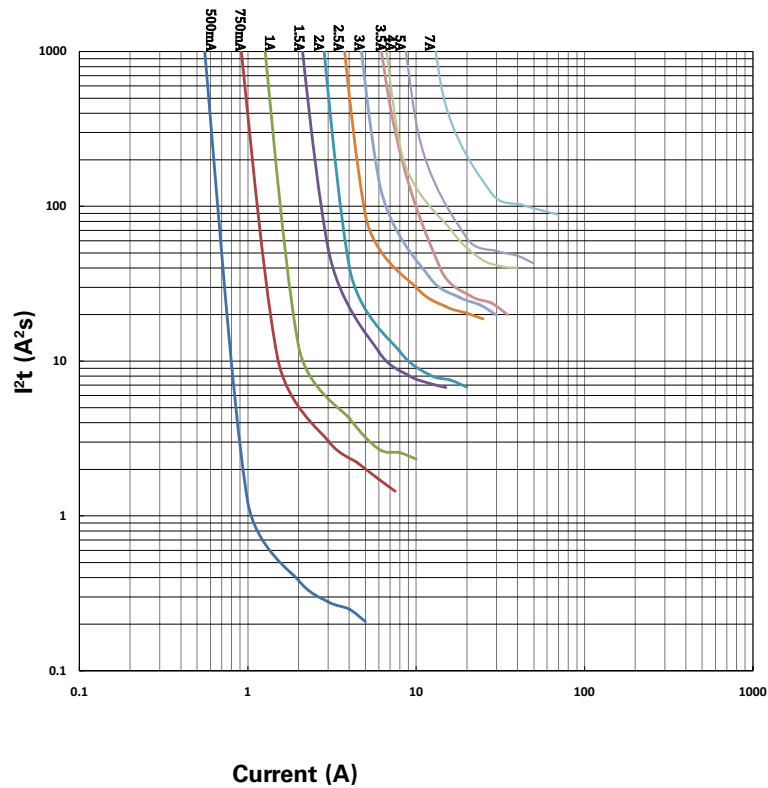

Wave solder profile

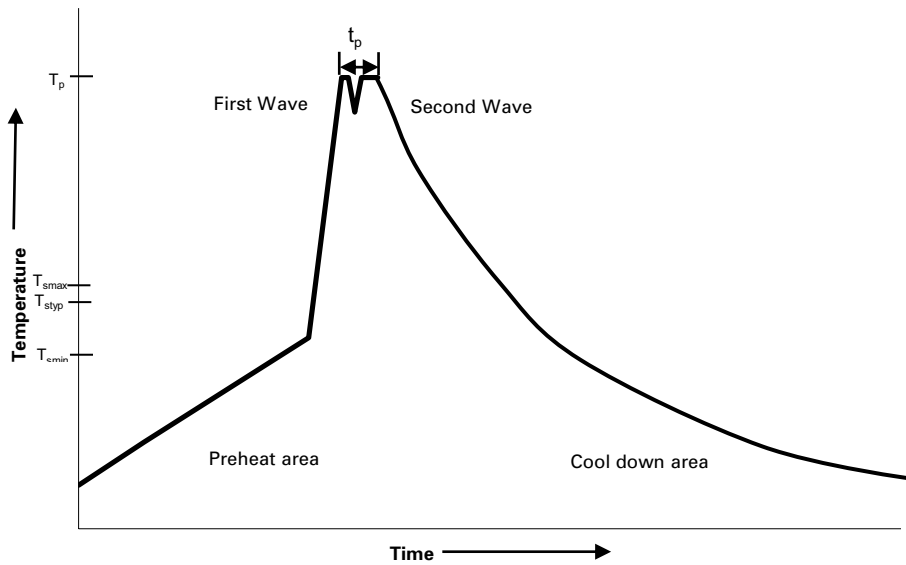

Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat	• Temperature min. (T_{smin})	100 °C
	• Temperature typ. (T_{styp})	120 °C
	• Temperature max. (T_{smax})	130 °C
	• Time (T_{smin} to T_{smax}) (t_s)	70 seconds
Δ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature (T_p)*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended.

Solder reflow profile

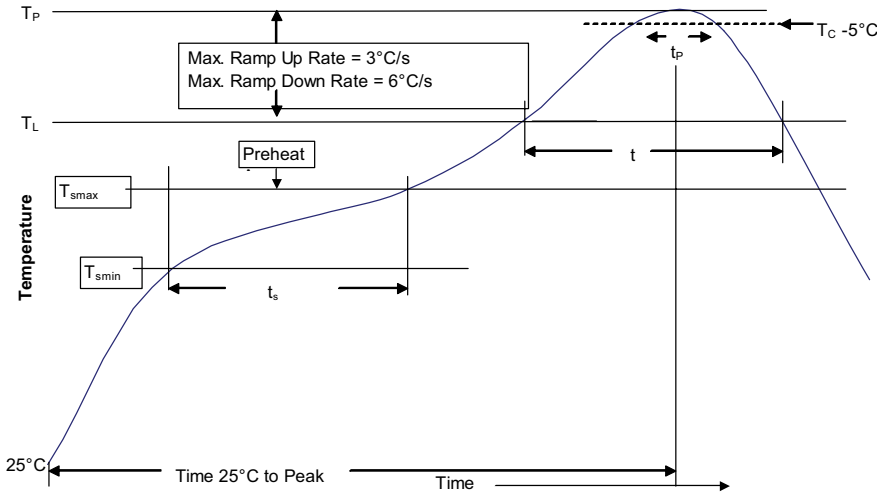


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak	<ul style="list-style-type: none"> Temperature min. (T_{smin}) Temperature max. (T_{smax}) Time (T_{smin} to T_{smax}) (t_s) 	<ul style="list-style-type: none"> 100 °C 150 °C 60-120 seconds
Ramp up rate T _L to T _p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T _L) Time (t _L) maintained above T _L	<ul style="list-style-type: none"> 183 °C 60-150 seconds 	<ul style="list-style-type: none"> 217 °C 60-150 seconds
Peak package body temperature (T _p)*	Table 1	Table 2
Time (t _p)* within 5 °C of the specified classification temperature (T _C)	20 seconds*	30 seconds*
Ramp-down rate (T _p to T _L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1195 BU-ELX22055
May 2022

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

