

CP042350

Primary Lithium / Manganese Dioxide Battery 3V
Swiss Made

Technical Data Sheet

Specifications

Renata Type	CP042350
IEC Designation	CP042350
Part Number	703668
Contact Method:	Stainless-Steel tabs

Chemical system	Li/MnO ₂
Nominal Voltage	3.0 V
Rated Capacity	28.0 mAh (4.8kΩ at 23°C to cut of 2.0V)
Bendability	> 1000 cycles / Ø 50mm (During discharge)

Internal Resistance < 30Ω (at 50% SOC and 23°C) DC pulse of 12.5 mA, 1 s

Thickness (t)	0.42 mm (±0.03mm)
Length (l)	50.1 mm (±0.2mm)
Width (w)	23.1 mm (±0.2mm)
Average Weight	~ 0.86 g


Discharge Characteristic

Cut off Voltage	2.0 V
Max discharge Current	0.625 mA (for continuous discharge) 12.5 mA (for non continuous discharge)

Operating/Storage Temperature -40°C ... +60°C
(0°C - 30°C recommended in case of storage for more than 3 months)

Self Discharge at 23°C < 5% / year

Dimensions

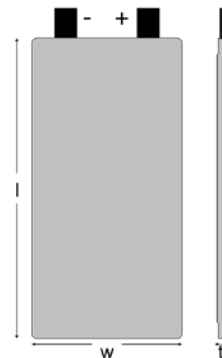

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.