

2AMRS637WPS

Rollup shutter controllable via wifi and voice assistant


Rollup shutter management device controllable via Wifi and/or push button
N.O.

Controllable with Android/iOS/Windows app IoT Light Wifi.

| Input Controls | |
|---------------------------|-----|
| Type | Qty |
| Not insulated Push button | 2 |
| Wifi | 1 |

TECHNICAL NOTES

- Rollup shutter management device controllable via Wifi and/or push button
N.O.
- Power input voltage range 100-240 VAC.
- Max Output current 2A RMS for each output channel.
- The device is not equipped with earth connection
Protection against accidental contact is guaranteed by the enclosure.
- Cross-section of cables 14-30 AWG (0.05-2.08 mmq).
- Controllable with Android/iOS/Windows app IoT Light Wifi.
- Input Controls: Not insulated Push button x2, Wifi x1.
- Printed Circuit UL.
- Protection Class: IP20.
- Standard Dimension 40x80x24.45 mm.
- Dimension with accessories 40x100x24.45 mm.
- Works with the Google Assistant.
- Compatible with Amazon Alexa Voice Assistant through the skill Newlab.
- All connections must be made with non-live devices
and carried out by specialized personnel.
- Use only in dry conditions.

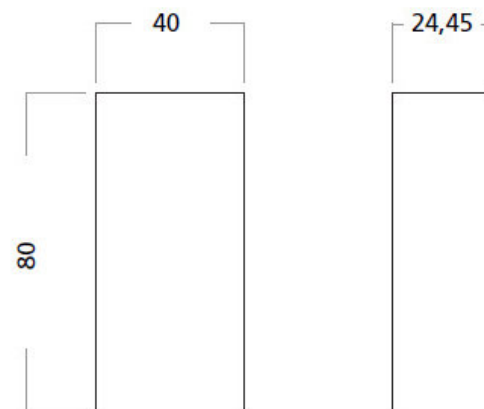

| CODE | INPUT | (MAX) OUTPUT | CONTROL | CASE | DIMENSION |
|------|-------------|--------------------|--|------|------------------|
| | VOLTAGE | CURRENT | INPUTS | | mm |
| | 110-240V AC | 2A RMS for channel | Not insulated Push button x2 Wifi x1 | YES | 40x80 h 24.45 |