

NXP i.MX 8M Plus for Industry 4.0 & Beyond

conga-SMX8-Plus




- NXP i.MX 8M Plus 14nm FinFET processor series
4-core ARM Cortex-A53 / Cortex-M7 + NPU
- Enhanced AI, Machine Learning and Vision capabilities featuring NPU and integrated camera ISP's
- Ultra low power architecture with 2-5W
- Extended longevity up to 15 years
- Temperature range up to -40°C .. +85°C



Form factor	SMARC Specification 2.1				
CPU SoC	NXP i.MX 8M Plus Processor Cores				
		ARM Cortex-A53	ARM Cortex-M7	NPU	GPU
	i.MX 8M Plus Quad (consumer) i.MX 8M Plus Quad (industrial)	4x @ 1.8 GHz 64bit 4x @ 1.6 GHz 64bit	1x @ 800MHz 1x @ 800MHz	up to 2.3 TOPS up to 2.3 TOPS	GC7000UL/GC520L GC7000UL/GC520L
DRAM	Up to 6 GByte onboard LPDDR4 memory 4000 MT/s inline ECC				
Ethernet	2x Gbit Ethernet with IEEE 1588 Support (1x with TSN support)				
I/O Interfaces	1x dual-role USB 2.0 2x USB 2.0 2x USB 3.0 1x SDIO 3.0 1x PCIe 3.0 2x I ² C 1x SPI 4x UART (2x with Handshake) 2x CAN FD 14x GPIO optional soldered M.2 1216 WiFi/BT				
Mass Storage	eMMC 5.1 up to 128 GByte				
Sound	2x I ² S HiFi 4 DSP				
Graphics	Integrated in SoC GC7000UL 3D graphics with 2 high performance vec4 shaders GC520L 2D graphic supports up to 2x1080p60 or 1x4kp30 display resolution Up to 3 independent displays VPU up to 1080p60 H.265/H.264 decoding and encoding OpenGL ES 3.1 Vulkan VX extensions OpenCL 1.2 FP OpenVG 1.1				
Video Interfaces	1x dual channel 24-bit LVDS 1x HDMI 2.0a 1x MIPI-DSI 4-lane shared with second LVDS channel 2x MIPI-CSI 4-lanes 2x integrated Image Signal Processor (ISP) for cameras with up to 12 MP resolution				
Features	Watchdog Timer Cortex-A53 Console optional JTAG debug interface High Precision Real Time Clock				
AI & Machine Learning	Neural Processing Unit (NPU) with up to 2.3 TOPS NXP eIQ ML SW tools and libraries				
Security	Cryptographic Acceleration and Assurance Module Resource Domain Controller ARM® TrustZone® High Assurance Boot support SHE, Encryption Engine AES-128, AES-256, 3DES, RC4, RSA4096, TRNG SHA-1, SHA-2, SHA-256, MD-5 RSA-1024, 2048, 3072, 4096 and secure key storage side channel attack resistance				
Boot Loader	U-Boot boot loader				
Operating Systems	Linux, Yocto Project Android				
Power Consumption	Low power Cortex-A53 / Cortex-M7 typ. application 2-6W @ 5V				
Temperature Range	Operating Temperature Range:		0 to +60°C commercial grade -40 to +85°C industrial grade		
	Storage Temperature Range:		-40 to +85°C		
Humidity	Operating: 10 - 90% r. H. non cond.		Storage: 5 - 95% r. H. non cond.		
Size	82 x 50 mm (3,23" x 1,97")				

conga-SMX8-Plus | Block Diagram

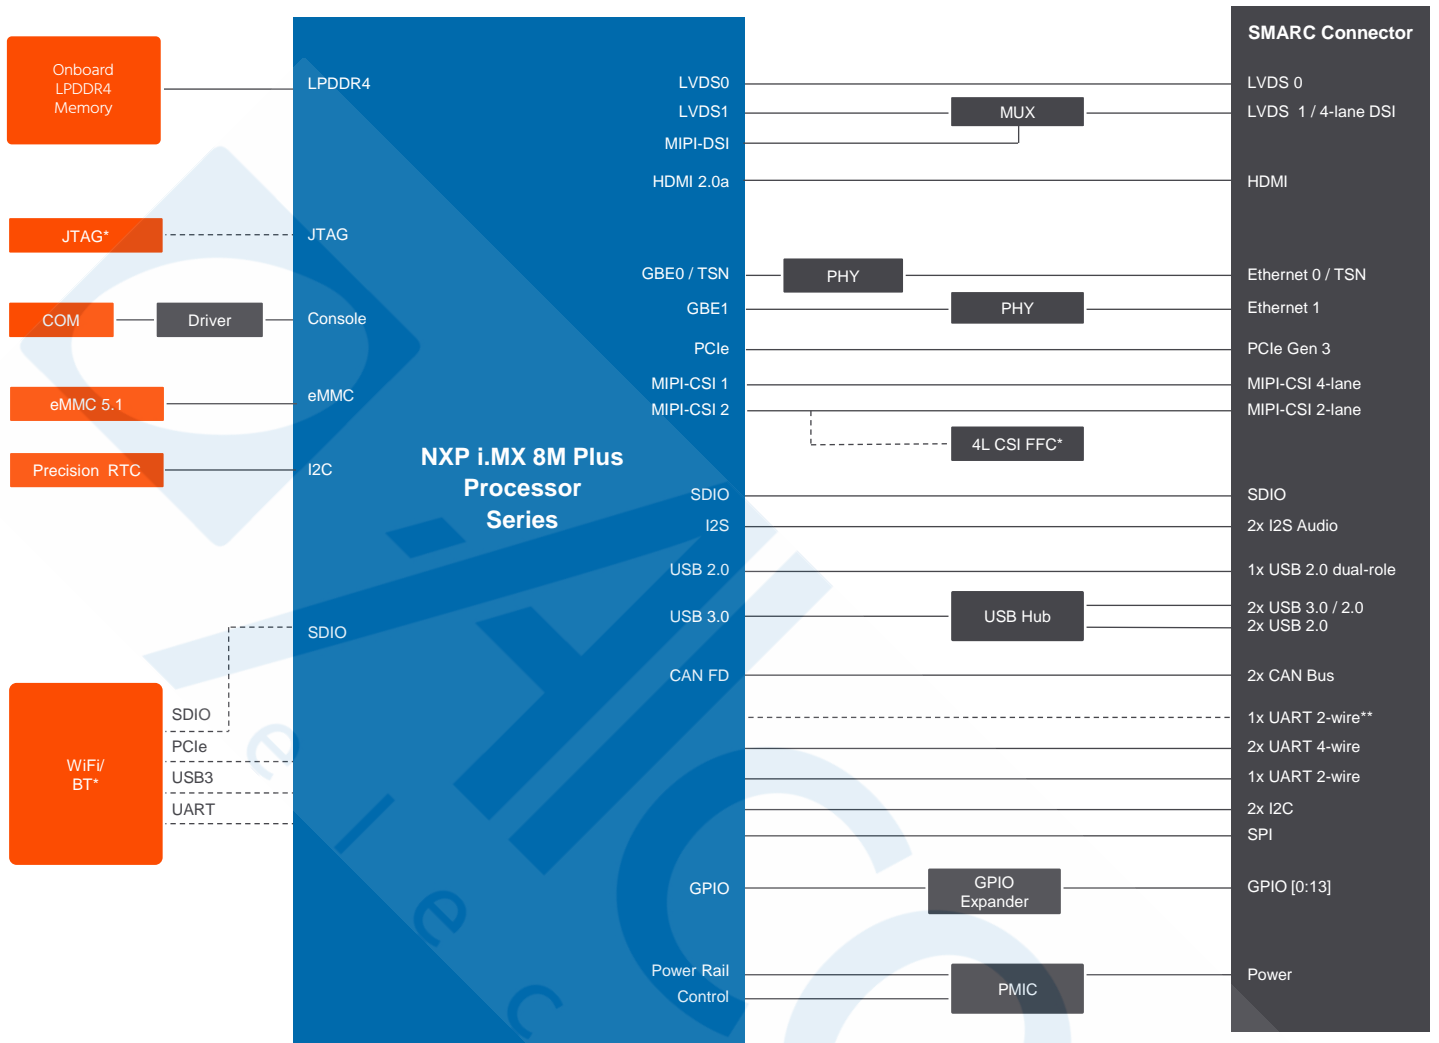

* Assembly Option
 ** Shared with Console

conga-SMX8-Plus | Order Information

Article	PN	Description
conga-SMX8-Plus/i-QC-NPU-4G eMMC16	051320	SMARC 2.1 module with low-power 14nm NXP i.MX 8M Plus Quad processor. Features 4x ARM Cortex-A53 @ 1.6GHz +1x ARM Cortex-M7 + NPU, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
conga-SMX8-Plus/i-QC-NPU-2G eMMC16	051321	SMARC 2.1 module with low-power 14nm NXP i.MX 8M Plus Quad processor. Features 4x ARM Cortex-A53 @ 1.6GHz +1x ARM Cortex-M7 + NPU, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
conga-SMX8-Plus/CSP-B	051350	Passive cooling solution for SMARC module conga-SMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are with 2.7mm bore hole.
conga-SMX8-Plus/HSP-B	051351	Heat spreader solution for SMARC module conga-SMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are with 2.7mm bore hole.
SMARC/CSA Adapter	050060	Active cooling solution adapter for SMARC modules used in combination with module heat spreader.
conga-SEVAL	007010	Evaluation carrier board for SMARC modules.
conga-SMC1/SMARC-ARM	020750	3.5" carrier board for congatec SMARC modules based on NXP i.MX ARM architecture.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

© 2021 congatec GmbH.
All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec GmbH.
Draft Rev. 0.3, August 9, 2021