



InHand Networks



With 3G/4G, Wi-Fi and Link Backup

InRouter615-S Series

Industrial LTE Router

The InRouter615-S (also IR615-S) is a series of IoT router that supports 3G/4G, Wi-Fi and VPN. It provides easy network access for field devices with 3G/4G wireless WAN and Wi-Fi wireless LAN support, helps to build device networks scaling from tens up to tens of thousands.

With embedded hardware & software watchdogs and multi-layer link detection mechanism, the router safeguards stable and highly-reliable communications for field sites, especially unattended sites. It also supports InHand DeviceManager to facilitate remote network management.


Multiple VPN encryption technologies can ensure secure data transmission, preventing malicious data access and tampering. The user-friendly WEB interface drastically reduces the difficulty of network configuration.

With easy network access, ease of use, and remote management functions, the router provides reliable high-speed data channel for things in the true sense of IoT.

Applicable to a wide range of applications, including large-scale networking:

- Express parcel cabinet
- Branch networking
- Commercial networking
- Public utility: heating station, gas valve room, etc.
- Water treatment
- Security surveillance and criminal investigation
- Smart transportation
- Smart grid
- Smart manufacturing
- Photovoltaic energy
- Industrial automation, etc.

Application Case

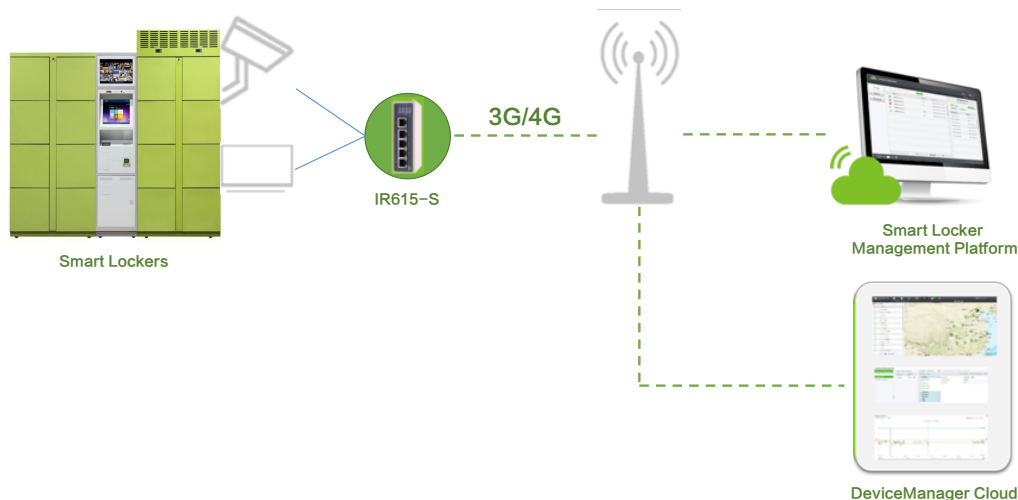

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Features and Advantages

- + Support 4G LTE CAT4 high-speed network, as well LTE CAT1 and CAT-M low-rate networks
 - + Support WLAN
 - + 5 Ethernet ports
 - + Multiple VPN functions
 - + Multiple built-in link redundancies ensure uninterrupted communications
 - + Support SNMP and InHand DeviceManager cloud platform, for efficient central network management
 - + Support high-efficiency deployment of large-scale device networks
 - + Compact sized, easy to fit
 - + Industrial-grade, ready for challenging conditions
- **Uninterrupted Internet access**
Supports multiple fast LTE WAN networks. Get device connected through the global covering 3G/4G network regardless of where the device is located. Three LTE network types to choose: LTE CAT4 (150/50Mbps down/uplink), CAT1 (10/5Mbps down/uplink), and CAT-M (375/300Kbps down/uplink).

Support Wi-Fi, both AP & STA modes, to set up secure wireless networks easily. Support 3G/4G and Wi-Fi mutual-backup, further ensuring uninterrupted transmission by providing redundant communication links.
 - **Strong security protection**
Transmission security: support IPsec VPN, L2TP, PPTP, OPEN VPN, GRE, and CA certificate.

Network protection: support SPI stateful detection, Secure Shell (SSH), intrusion protection (forbidden ping), DDoS defense, attack defense, IP-MAC binding, etc. to protect against external attacks


Access security: support user hierarchical authorization, implement secure access management by giving different roles different permissions.
 - **High reliability and stability**
Link layer detection: detect link conditions, auto redial when dropped off to maintain link connection.

PPP layer detection: maintain connection to carrier network side, prevent forced hibernation, and keep network link smooth.

VPN tunnel detection: maintain stable connection of VPN tunnels and continuous data transmission.

Device fault self-recovery: embedded hardware watchdog, self-recovers from malfunctions, maintaining high device availability.
 - **Network management cloud platform for central management and deployment**
Support InHand DeviceManager (DM) cloud platform to facilitate remote monitoring and central management of large-scale device networks. Batch configure large numbers of devices, improve network deployment and maintenance efficiency.
 - **Industrial-grade design**
Metal housing, IP30 protection rating. Reach level 3 on EMC indexes. Ethernet port supports 1.5KV isolation protection. Wide operating temperature: -20°C~70°C. Wide voltage input: DC9-36V.

Dimensions (mm)

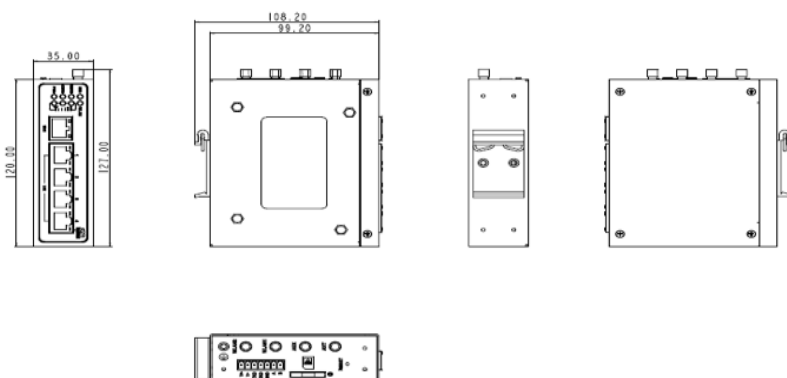

DIN-Rail mounting diagram. Please refer to "Quick Installation Guide" for wall/lug mounting diagram.

7-PIN Industrial Terminal Interface Definition

No.	Definition	Description
1	V+	Positive electrode
2	V-	Negative electrode
3	TXD	Serial RS232 sending
4	RXD	Serial RS232 receiving
5	GND	Serial RS232 signal ground
6	A	Serial RS485 +
7	B	Serial RS485-

Product Specifications

InRouter615-S Hardware Specifications			
Interface			
Ethernet Port	1*10/100Mbps fast Ethernet WAN port 4*10/100Mbps fast Ethernet LAN ports 1.5KV network isolation protection		
Power Supply	DC9-26V, 36V expandable		
Industrial Serial Port	RS-232/485 x 1 ESD protection: 15KV		
SIM Card	Drawer-type card slot x 1 Part models: Drawer-type card slot x 2		
Reset	Pinhole reset button		
Antenna Connector	3G/4G: SMA x 2 WLAN: RP-SMA x 2		
Ground Terminal	Has ground terminal		
Mechanical Specs			
Dimensions (mm)	127x108.2x35mm	Weight (g)	440g
Installation Method	DIN-Rail Optional: Lugs/wall mounting	Protection Rating	IP30
Housing	Metal housing	Cooling	Fanless
Power Rate			
Working Power	150mA-320mA@12V	Standby Power	120mA-200mA@12V
Peak Power	320mA@12V		
Wi-Fi Transmit Power			
Transmit Power	802.11b:16dBm+/-2dBm(11Mbps) 802.11g:16dBm+/-2dBm(54Mbps) 802.11n@2.4GHz: 16dBm+/-2dBm(HT20MCS7) 802.11n@2.4GHz:16dBm+/-2dBm(HT40MCS7)		
Ambient Environment			
Storage Temperature	-40 ~ 85°C	Operating Temperature	-20 ~ 70°C
Ambient Humidity	5 ~ 95% (non-condensing)		
Indicator			
LED	POWER, STATUS, WARN, ERROR, WLAN, LINK, signal indicator		
EMC Index			
Static	EN61000-4-2, level 3	Radiation Electric Field	EN61000-4-3, level 3
Pulsed Electric Field	EN61000-4-4, level 3	Surge	EN61000-4-5, level 3
Conducted Disturbance Immunity	EN61000-4-6, level 3	Shock Wave Resistance	EN61000-4-12, level 3
Power Frequency Magnetic Field Resistance	EN61000-4-8, horizontal / vertical 400A/m (>level 3)		
Physical Specs			
Shockproof	IEC60068-2-27	Vibration Resistance	IEC60068-2-6
Free Fall	IEC60068-2-32		
Certificate			
CE, FCC, PTCRB, IC, IMDA, RCM, Class I Division 2, Verizon, AT&T, T-Mobile, Sprint			

InRouter615-S Software Specifications			
Network Connection			
Network Access	APN, VPDN	Access Authentication	CHAP/PAP authentication
LAN Protocol	ARP, Ethernet	WAN Protocol	Static IP, DHCP, PPPoE, PPP
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA, TDD LTE/FDD LTE		
IP Application	Ping, Trace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet		
IP Routing	Static routing	NAT	Support network address translation
Network Security			
Firewall	Stateful Packet Inspection (SPI), DoS attack defense; Multicast filter/Ping packet, Access Control List (ACL); Content URL filter, port mapping, virtual IP mapping, IP/MAC binding		
Access Security	Multi-level user authorization		
Data Security	IPsec VPN /L2TP/PPTP/GRE/OPEN VPN/CA digital certificate		
Reliability			
Backup	Dual-SIM mutual backup, VRRP hot backup, link backup		
Link detection	Send heartbeat packets, auto redial when disconnected		
Embedded Watchdog	Device operation self-detection, auto recover from malfunctions		
WLAN (Optional)			
Protocol & Standard	IEEE 802.11b/g/n	Transmission Rate	Up to 300Mbps
Working Mode	AP and STA modes		
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption		
Transmission Distance	100m (actual transmission distance depends on site environment)		
Intelligence			
Integrated DTU Functions	TCP, UDP transparent transmission mode, TCP Server mode; Support conversion of Modbus RTU to Modbus TCP bridge; Support DCUDP, DCTCP mode; Support for up to 15 data centers		
Network Management			
QoS Management	Support bandwidth limit, IP speed limit		
Configuration Method	Telnet, web, ssh and console	Upgrade Method	Web, Device Manager
Logs	Local system logs, remote logs, and serial export of logs. Power down saving of important logs.		
SMS Functions	Status query, configuration, restart	Dial-on-demand	Dial-on-demand, data / SMS activation
Network Management	Support InHand DeviceManager, batch management		
Simple Network Management	SNMP v1/v2c/v3, support SNMP TRAP		
Traffic Management	Support data traffic threshold setting, support traffic statistics and traffic alarm		
Alarms	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm, etc.		
Maintenance Tools	Ping, route tracking, network speed test		
Status Query	System status, modem status, network connection status, and routing status		

Ordering Guide

Model code: IR615-S-<WMNN>-<W/NA>-<DS/NS>			
Model	<WMNN>: Cellular Type & Module U-UMTS(HSPA), L-LTE single mode, L3-LTE triple-mode, L5-LTE 5-mode, L7-LTE 7-mode	<W/NA>: WLAN	<DS/NA>: Dual SIM
IR615-S-U/(PS08/30108) -<W/NA>-<DS/NA>	(Global) UMTS(HSPA+) Band 1/2/5/8 (850/900/1900/2100MHz) EDGE/GPRS/GSM 850/900/1800/1900	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-L5/(TH09/60218) -<W/NA>-<DS/NA>	(China) LTE-FDD Band 1/3/8 LTE-TDD Band 38/39/40/41 TD-SCDMA Band 34/39 UMTS (DC-HSPA+) Band 1/5/8/9 EDGE/GPRS/GSM 900/1800MHz	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-L7/(TL01/60522) -<W/NA>-<DS/NA>	(China) LTE-FDD Band 1/3/5/8 LTE-TDD Band 38/39/40/41 TD-SCDMA Band 34/39 UMTS (DC-HSPA+) Band 1/8 EVDO 800MHz CDMA 1x 800MHz EDGE/GPRS/GSM 850/900/1800/1900MHz	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-L3/(FS08/60123) -<W/NA>	LTE-FDD Band 1/3/7/8/20 (For Europe) UMTS(HSPA+) Band1/3/8 EDGE/GPRS/GSM 900/1800MHz	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-L3/(FH20/60220) -<W/NA>-<DS/NA>	(Europe, Asia Pacific) LTE-FDD Band 1/2/3/4/5/7/8/20 UMTS(DC-HSPA+) Band 1/2/5/8 EDGE/GPRS/GSM 850/900/1800/1900MHz	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S -FQ88-<W/NA>-<DS/NA>	LTE FDD Band 1/3/8/18/19/26 LTE TDD Band 41 WCDMA Band 1/6/8/19 (For Japan)	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-FB78-<W/NA>-<DS/NA>	(Australia & S.America) LTE-FDD CAT4 Band 1/3/5/7/8/28 UMTS(DC-HSPA+) 850/900/1900/2100	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-FB53-<W/NA>-<DS/NA>	(Europe) LTE-FDD CAT1 Band 3/7/20 EDGE/GPRS/GSM 900/1800MHz	W: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM
IR615-S-FB63-<W/NA>	(Asia Pacific) LTE-FDD CAT1 Band 3/8/28 UMTS(DC-HSPA+) 2100	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FS18 -<W/NA>	(AT&T, North America) LTE-FDD Band 2/4/5/17 UMTS(HSPA+) Band 2/4/5 EDGE/GPRS/GSM 850/900/1800/1900MHz	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FB38-<W/NA>	(Verizon Wireless, North America) LTE-FDD CAT4 Band 2/4/5/13/17 UMTS(DC-HSPA+) Band 2/5	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FB13-<W/NA>	(AT&T, North America) LTE-FDD CAT1 Band 2/4/12	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FB23-<W/NA>	(Verizon Wireless, USA) LTE-FDD CAT1 Band 4/13	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FT43-<W/NA>	(Sprint, USA) LTE-FDD CAT1 Band 2/4/5/12/25/26	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-FB02-<W/NA>	(Global) (Band 39 in M1-only) LTE CATM/NB Band 1/2/3/4/5/8/12/13/17/18/19/20/25/26/28	W: Wi-Fi <NA>: no Wi-Fi	Single SIM
IR615-S-EN00	No cellular module	W: Wi-Fi <NA>: no Wi-Fi	
Example:	IR615-S-L5-WLAN: five Ethernet ports IR615-S series cellular router, IPSec/PPTP/L2TP/OPEN VPN, 4G LTE (5-mode) networks, Wi-Fi AP&STA modes, RS232 or RS-485 serial port		

About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Encompass Product Partner in Asia-Pacific and Schneider Electric CAPP Technology Partner, while listed on NEEQ 430642 as of February 18, 2014, InHand Networks defines industrial innovation and reliability.

