



AirLink® LX40 LTE Router

BENEFITS

- Out-of-Box LTE Connectivity: Add LTE connectivity to your existing equipment
- 150 Mbps LTE with optional Wi-Fi, plus LTE-M/NB-IoT version with extended coverage and reach for challenging locations
- Enables edge processing with secure embedded application framework (ALEOS Application Framework)
- Integrated 7-36VDC industrial grade power supply and -30C to +65C temperature range to provide superior reliability without need for additional power conditioning or adapters
- Power-over-Ethernet powered device (PD) for fixed low power applications
- ALMS Cloud or AMM On-Premises Management single pane device management across all devices

IDEAL APPLICATIONS

Primary cellular connectivity for:

- IoT/M2M
- Cameras and Security
- Digital Signage
- Building Automation
- ATMs, Kiosks, and Point of Sale
- Smart Lockers
- Industrial Process Automation

Compact LTE Router for IoT Applications


The AirLink® LX40 is a compact LTE and LTE-M / NB-IoT router for IoT/M2M applications, offering “out-of-the box” connectivity that is simple to install and easy to manage.

The LX40 provides purpose-built, secure, managed LTE networking for applications such as Cameras, Security, Point-of-Sale terminals and Smart Lockers. The LX40 is also ideal for connecting industrial, remote data logging and sensing equipment in protected (indoor) locations and enables processing of IoT data at the edge.

As part of the AirLink Essential series, the LX40 is designed to meet the environmental and performance requirements of these applications, while delivering superior reliability and uninterrupted operation in fixed, indoor and protected outdoor environments.

LX40 is available with optional Wi-Fi with Dual Band 802.11ac to provide an access point or to connect to local Wi-Fi networks.

Purpose-Built, Secure, Reliable, Managed Cellular LTE Networking

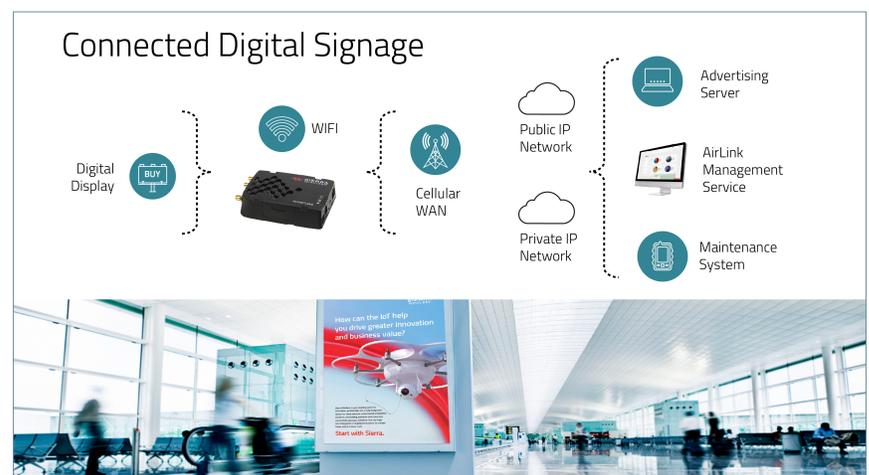

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

LX40				
	North America	EMEA	Australia & New Zealand	Global
	LTE			LTE-M/NB-IoT
LTE CATEGORY	Cat-4 (WP7610)	Cat-4 (WP7607)	Cat-4 (WP7609)	Cat-M1/NB1 (WP7702)
Peak D/L	Up to 150 Mbps	Up to 150 Mbps	Up to 150 Mbps	Cat-M1: 300kbps Cat-NB1: 27kbps
Peak U/L	Up to 50 Mbps	Up to 50 Mbps	Up to 50 Mbps	Cat-M1: 375kbps Cat-NB1: 65kbps
4G LTE Frequency Bands	1900(B2), AWS(B4), 850(B5), 700(B12), 700(B13), 700(B14), 700(B17), 1700(B66)	2100(B1), 1800(B3), 2600(B7), 900(B8), 800(B20), 700(B28)	2100(B1), 1800(B3), 850(B5), 2600(B7), 900(B8), 700(B28)	2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 900(B8), 700(B12), 700(B13), 700(B17), 850 (B18), 850(B19), 800(B20), 850(B26), 700(B28)
3G WCDMA/HSPA+ Frequency Bands	1900(B2), AWS(B4), 850(B5)	2100(B1), 900(B8)	2100(B1), 850(B5), 900(B8)	
2G GSM/GPRS Frequency Bands		900, 1800		850, 900, 1800, 1900
APPROVALS				
Regulatory	FCC, IC, PTCRB	GCF, CE	GCF, RCM	PTCRB, FCC, GCF, IC, CE
Carrier	Verizon, AT&T		Planned: Telstra	Verizon (Cat-M1), AT&T (Cat-M1)
PART NUMBERS	1104579 1104573 (Wi-Fi)	1104181 1104182 (Wi-Fi)	1104183 1104184 (Wi-Fi)	1104180

	Specification										
HOST INTERFACES	1 Gigabit RJ-45 Ethernet Port (POE) USB 2.0 Micro-B Connector 2 SMA antenna connectors (cellular, diversity) 1 SMA for LTE-M version 1 RP SMA antenna connector (Wi-Fi)										
Wi-Fi (Optional)	Dual Band 2.4/5GHz Wi-Fi 802.11 b/g/n/ac (Wave2 Client Mode) Support for 10 clients, WPA2 Enterprise Output power 16dBm per channel Access Point or Client Mode (Wi-Fi as WAN) Single SSID Support Captive Portal										
INPUT/OUTPUT	Configurable I/O pin on power connector <ul style="list-style-type: none"> Digital Inputs: ON Voltage: 2.7 to 36 VDC Configurable Pull-ups for dry contact input Digital Open Collector Output > sinking 500 mA Analog Inputs: 0.5-36VDC (range selectable) 										
LAN (ETHERNET/USB)	DHCP Server IP Passthrough VLAN Host Interface Watchdog PPPoE										
NETWORK AND ROUTING	<table border="0"> <tr> <td>Network Address Translation</td> <td>Ethernet WAN</td> </tr> <tr> <td>Port Forwarding</td> <td>Verizon PNTM</td> </tr> <tr> <td>NEMO/DMNR</td> <td>IPv6 Gateway</td> </tr> <tr> <td>VRRP</td> <td>Policy Routing</td> </tr> <tr> <td>Reliable Static Route</td> <td>Dynamic DNS</td> </tr> </table>	Network Address Translation	Ethernet WAN	Port Forwarding	Verizon PNTM	NEMO/DMNR	IPv6 Gateway	VRRP	Policy Routing	Reliable Static Route	Dynamic DNS
Network Address Translation	Ethernet WAN										
Port Forwarding	Verizon PNTM										
NEMO/DMNR	IPv6 Gateway										
VRRP	Policy Routing										
Reliable Static Route	Dynamic DNS										
VPNINTERFACES	IPsec, GRE, and OpenVPN Client Up to 5 concurrent tunnels Split Tunnel Dead Peer Detection (DPD)										
ROUTER MANAGEMENT	Local web user interface AT Command Line Interface (Telnet/SSH) SNMP SMS Commands										



	Specification
SECURITY	Remote Authentication (LDAP, RADIUS, TACACS+) DMZ Inbound and Outbound Port filtering Inbound and Outbound Trusted IP MAC Address Filtering PCI compatible Secure Firmware Update
NETWORK MANAGEMENT	Secure mobile network & asset management application available in the cloud or licensed platform in the enterprise data center Fleet wide firmware upgrade delivery Router configuration and template management Router staging over the air and local Ethernet connection Over-the-air software and radio module firmware updates Device Configuration Templates Configurable monitoring and alerting Remote provisioning and airtime activation (where applicable)
EVENTS ENGINE	Custom event triggers and reports Configurable interface, no programming Event Types: Digital Input, Network Parameters, Data Usage, Timer, Power, Device Temperature and Voltage Report Types: RAP, SMS, Email, SNMP Trap, TCP (Binary, XML, CSV) Event Actions: Drive Relay Output
ENVIRONMENTAL	Operating Temperature: -30°C to +65°C / -22°F to +149°F (+60°C / +140°F when using PoE) Storage Temperature: -40°C to +85°C / -40°F to +185°F Humidity: 90% RH @ 60°C Military Spec ML-STD-810G conformance to shock, vibration, thermal shock, and humidity IP21 rated ingress protection
INDUSTRY CERTIFICATIONS	Safety: IECCE Certification Bodies Scheme (CB Scheme), UL 60950 Vehicle Usage: E-Mark (UN ECE Regulation 10.04), ISO7637-2, SAE J1455 (Shock, Vibration, Electrical) Environmental: RoHS2, REACH, WEEE Environmental: RoHS2, REACH, WEEE

	Specification
APPLICATION	ALEOS Application Framework (AAF) LUA Scripting Language
POWER	Input Voltage: 7 to 36 VDC Low voltage disconnect to prevent battery drain Built-in protection against voltage transients Power-over-Ethernet (PoE) powered device Ignition Sense with time delay shutdown
DIMENSIONS	103 mm (111 mm including connectors) x 79 mm x 25 mm 4.1 in (4.4 in including connectors) x 3.1 in x 1.0 in

*For carrier specific band support please refer to the hardware user guide.

	Specification
SUPPORT AND WARRANTY	Includes 1st Year AirLink Complete: <ul style="list-style-type: none"> AirLink Management Service (ALMS) Direct 24/7 Technical Support 3-year standard warranty; optional 2-year warranty extension 1-day Accelerated Hardware Replacement available through participating resellers
ACCESSORIES	In the box: DC Power Cable and Quick Start Guide Other Accessories (sold separately): 2000579 AC Adapter, 12VDC 6001221 DIN Rail Bracket 6001110 Cellular Paddle Antenna 6001111 Wi-Fi 2.4/5Hz Paddle Antenna 6001231 Panel Antenna (LPWA) For antenna options visit: sierrawireless.com/antennas

DIMENSIONS

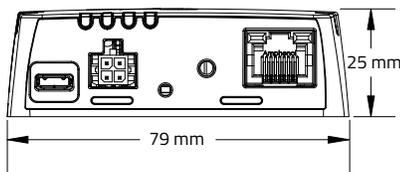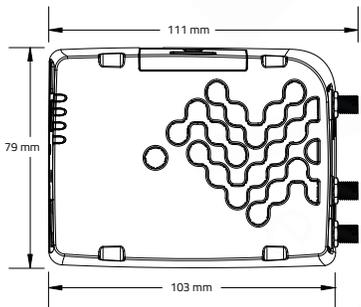

AirLink Networking Solution - Related Products

AIRLINK NETWORK MANAGEMENT SOLUTIONS

AIRLINK MANAGEMENT SERVICE (ALMS)



- Secure, Cloud-based network and asset management
- Remotely deploy, configure, monitor and manage AirLink devices
- Carrier-grade, high availability, secure, global infrastructure

AIRLINK MANAGER / MOBILITY MANAGER (AM/AMM)



- Deployable in the enterprise data center (on-premises) or in the cloud
- Advanced, end-to-end network and asset management for both fixed and mobile networks.
- Remote, real-time configuration, control and troubleshooting of AirLink devices

AIRLINK VPN APPLIANCE

AIRLINK CONNECTION MANAGER



- VPN appliance built from the ground up for Airlink routers & gateways
- Simplify deployment and management of your VPN solution, extending the enterprise to the network edge for fixed and mobile endpoints
- Carrier agnostic – ACM doesn't require fixed and/or public IP
- Compatible with FIPS 140-2, and always-on VPN capability